POPULAR SCIENCE

MECHANICS AND HANDICRAFT



Wilbur Shaw Previews a







POWERFUL • Made in Germany



| o lo iliu ilicui | lly toams, cleans, rin: |
|------------------|--|
| Seres Bookens | Wash your ear QUICK snd essy, without back-breaking toll! The new, MAGICA! FDAM WASHER uses gen tie foam action-protects ca finish. Just stlach to gar- den hose, turn on, watch |
| Fount clean | grease, dirt, grime foam awsyl Then turn valve and clear rinning water streams through. All controls right on handle-at your finger |
| Pinse crean | tips-no running back to spigot! No wiping need- ed! No soap streaking ever! So simple and easy to use! No. 11. Only3.95 |



EOPARD AT COVERS

ZEBRA SCOTCH PLAIDS. STRIPES, SOLIDS Any Design 1.98 3.75

TAKE YOUR PICK



have your photographic was a construction of the construction of t

LONG RANGE-SHARP & CLEAR! (Complete with Carrying Case

Save \$7.00—jet yourself a genuine, fully guaranteed "KLAROVIS." Look vinced of their quality & power!
Genuine Ground POWER LENSES bring in distant objects & people with smazing ciar-distant objects & people with smazing ciar-most Light weight, easy to carry, yet almost impossible to break in normal use. Winces seem to mett Mayor way 100 million of the company of t With this power-packed instrument, distances seem to meit away. you'll aiways have a "front seat" at boxing matches, baseball, football, etc. Ideal for travelers, hunters. Included: reg. S7 Fiexomatic case & straps. No. 134. NOW, 0.15 S7 Fiexomatic case & straps. No. 134. Now de with case (No. 134-B), bargain price 3.95.

Compare



NIGHT Headlight Horror!

Don't be trapped...blinded...malmedi FILTRO-LUX Night Driving Glasses help protect you against dangerous headlight glare! Drive all night! Look right into oncoming cars' lights, safely com-



The EASY way to paint Famous Burgess ELECTRIC PAINT SPRAYER



PAINTS DISINFECTS LUBRICATES

KILLS INSECTS

· REACHES ALL OVER!

788

Moto-Matic way!

Monev Back Guarantee!

lorify your car!

Unbelievable value! Closing out our regularly \$2.95 seat covers for only 1.98-2 for 3.751 Made of tough, durable plastic to simulate LEOPARD FUR, ZEBRA, SCOTCH PLAIDS, STRIPES, Etc. Choose your favorite design! Protects new cars against grime, dust, water, For ALL cars, ALL models. NO sewing needed! Just slide on or off in a jiffy. Covers front, left and right sides of seat. Mention car make, year, model; also design preferred, No. 150. Out they go-one low price, 1.98 each, TWO for 3.75.



Wonder of the Age! WALKIE-TALKIES 2 WAY

TELEPHONE SYSTEM

No Batteries Needed!

NOW — a remarkable 2 way telephone system between house and garage, room to room, barn, workshop, etc.! No batteries! No electricity! Operates at considerable distances! So useful! Fun too, for all! Complete with 2 power phones and wiring — ready for use. No. 17. Our low price... 3.90

TRY AT OUR RISK!

STOP AUTO THIEVES ELECTRIC BURGLAR ALARM

Protects car, tires, gas, accessories! rotects car, tires, gas, accessories!
Foil auto thieves! The NEW Pend-Electric Burgiar Alarm gives you ALL-OUT
protection against accessory, tire, gasor
ENTIRE car even if you leave the door
open! Anyone molesting your car will
get the shock of his life. The "isseen
ordinuing for 15 seconds after car is
continuing for 15 seconds after car is
will run for it! Easily installed with a
screwdriver. Complete with wiring, inst
will run for it! Casily installed with a
proven the second of the

instructions,





These Prices!

Try This Sprayer Now!

Dom't paint it. . . SPRAY it the EAST Burgess Electric Sprayer way. Who move meany breakes sprayer way. Who move meany breakes your favorite paint, enamel, lacquer, lacquer, lacquer, sprayer, sprayer,

PAINT YOUR OWN CAR! Save \$50.00 or MORE! PAINT YOUR OWN CAR! Save \$50.00 or MORE!

The According to the Control of the Con No county tools, no special a MATCH!
edj Do own hos special skill need with repairs, say home, radi skill need with revolutionney, time, the company 2-in due, to the company and sut SOLDER with a MATCH!

SEND NO MONEY—Try without obligation!

| иот | O-MA | TIC | Co | MPA | NY, | Dep | t. 7- | м | |
|-----|------|-----|-----|------|-----|-----|-------|------|---|
| 129 | West | 330 | d S | tree | | New | Vori | . 1. | N |

RUSH the following C.O.D. plus postage, on 5 DAY TRIAL, with GUARANTEE of absolute satisfaction or full price back:

| NUMBER | ITEM | | | PRICE |
|---------|------|------|-------|-------|
| | | | | |
| NAME | | | | |
| ADDRESS | | | | |
| TOWN | | ZONE | STATE | |

_ZONE__ SAVE MORE! Send check, money order, or cash with this coupon and we pay all postage. Same MONEY-BACK guarantee.

America's Leading New-Idea Magazine for

Founded 1872, Vol. 161: No. 4

Mechanics and Handicraft

VOLTA TORREY, EDITOR . Howard Allaway, MANAGING EDITOR

Howard C. Jensen, art editor · Frank Rowsome Ir., assistant managing editor

SENIOR EDITORS: Harry Walton (Mechanics & Handicraft), Hartley E. Howe (Features), Martin Mann (Copy).

ASSOCIATE EDITORS: Alden P. Armagnac, Devon Francis, Sheldon M. Gallager, Kendall W. Goodwyn, Wesley S. Griswold, Herbert O. Johansen, Herbert R. Pfister, Denis Sneigr, Robert P. Stevenson, Ruth Westphal, Andrew R. Boone (Los Angeles).

ART: Harry Samuels (Director), Herbert Anthony, Rolf O. Erickson, Eric Karminski Ir., Richard Meyer, Frances Cooper Daniels.

PHOTOGRAPHY: W. W. Morris (Director). Hubert Luckett. Orlando Guerra. EDITORIAL ASSISTANTS: Harriet Trowbridge, Julia C. Bove, Carol Ennis, Rita K. Gilbert, Georgette Sparks, Katharine W. Townsend, Jeanne Van Houten.

Остовев, 1952

12 Pages about 1953 CARS



America's most widely known sports cartoonist—Tom Paprocki (above) of The Associated Press -teams up with British scientist Prof. A. M. Low to predict what's ahead in sports. For their forecast of the coming age of mechanized athletics, turn to page 97.

| Mechanical Sports Are Coming | 97 |
|--|-----|
| Buick Sets New Style for 1953 | 100 |
| 1953 Cars Will Have Air Conditioning | 105 |
| 1953 Cars Will Have Tubeless Tires | 108 |
| 1953 Forecast from Detroit | 111 |
| Will They Ever Climb Mt. Everest? | 118 |
| 'Space Men' Make College Men Think | 124 |
| Wingtip Shotguns Fire Rocket Salvo | 128 |
| The Crane That Saves \$2,000 a Minute | 144 |
| Nylon-Glass Armor Saves American Lives | 154 |
| How to Choose Your Trees | 166 |
| Look What They've Done to Motorcycles | 172 |
| 5 Ways to House Your TV Set | 177 |
| Homemade Meter Checks Car Battery | 192 |
| Gus Gets the Pitch | 196 |
| Snow Tires, Chains and Winter Driving | 201 |
| Making a Basement More Useful | 206 |
| How Karsh Pictures Celebrities | |
| W | |

(More features and departments are listed on page 4.)

Godfrey Hammond, PUBLISHER . Stephen P. Glennon. ADVERTISING DIRECTOR

ADVERTISING OFFICES; NEW YORK — 353 Fourth Ave.; CHICAGO—360 North Michigan Ave.; DETROIT—820 Book Bidg.; San Francisco—681 Market St.; CLEVELAND—228 Cilizens Bidg.; Los anceles—2550 Beverly Bivd. EDITORIAL OFFICES: 353 Fourth Avenue, New York 10.

radials monthly a 3.3 ferral Avenue, we vot 10. X, by Founds receives Publishing Co. Inc. dozentery Hannsond, Press.

23, 1018, re-niered as second-class matter July 26, 1048, at the Post Office in New York, N. X., under the set of March 3, 1870, at the Post Office in New York, N. X., under the set of March 3, 1870, provided the provided of the pro

Here's how—

to put new life in your tired heating plant?

INSTALL





MODEL OCA OIL BURNER—
The famous wall-flame burner blankets heating plant walls with an antural-burning, blue-hot flame. Special chromium steel flame rim converts all inta super-heated vapar for utmost heating efficiency. Soves up to 25% an fuel—aften mare—over ordinary gun-type burners!

MODEL GCT GAS BURNER— This advance-engineered burner combines every wanted, needed gas heating feature in ane smart-looking, compact cabinet. Clag-proof mona-port burner assures clean, efficient, troublefree operation and fast heat response. Works perfectly with oll types af gases.



EASY TERMS AVAILABLE!
NOTHING DOWN—36 MONTHS TO PAY!

MIKEN

Silent Automatic

HEAT

Why suffer through another winter of oldfashioned heating? It's so easy to install a Timken Silent Automatic Conversion Burner now and give your heating plant and yourself—a new lease on life!

You'll do better in every way with a Timken Silent Automatic! These thrifty burners save real money on fuel. They're clean-burning and dependable, engineered to outlast your present heating plant. Beautifully and compactly designed, they keep your basement looking neater—often give you enough extra space to build that workbench or fix up that play room. And you'll find work-free Timken Silent Automatic Heat gives you plenty of extra time to spend in your new-found space!

Convert now to the luxurious comfort and convenience of Timken Silent Automatic Heat! Your local dealer will be glad to help make this your automatic heating year!

A COMPLETE LINE OF FURNACES, BOILERS AND CONVERSION BURNERS, BOTH OIL AND GAS, FROM WHICH TO SELECT THE RIGHT MODEL FOR YOUR HOME AND BUDGET! OIL-FIRED WATER HEATERS, TOO!



TIMKEN SILENT AUTOMATIC DIVISION
The Timken-Detroit Axle Company • Jackson, Michigan
The Timken-Detroit Axle Company of Conada, Ltd., Toronto, On



MAIL THIS COUPON FOR FREE, ILLUSTRATED LITERATURE!

PS-10

Timken Silent Autamatic, Jackson, Michigan Please mail illustrated literature. I am interested in:

NAME (type of equipment)

STREET ADDRESS

CITY and STATE

If you are a student, please check here () for special information.



Sir Launcelot Wins All His Duels ...'cause PROTO means

PROTO means

Tools!

One reason why PROTO tools are professional tools is that they are made from PROTO-specified alloy steels. Known as PROTO-LOY, these special alloy steels provide great strength, hardness, toughness - and extra long life. Scientifie heat treatment, advanced designs, accurate manufacture, a meaningful guarantee and completeness of line are more reasons why experts prefer PROTO. For truly professional tools, sec your PROTO dealer. Send 104 for 68-page catalog to

The PROTO Line Includes Wrenches, Pliers, Screwdrivers, Punches, Chisels, Sockets & Handles and Many Others.

PLOMB TOOL TOMPANY 2257R Santa Fe Ave., Los Angeles 54, Calif.



Eastern Factory-Jamestown, N.Y.

News and Pictures

| Triple-Decked Air Freighter | 114 |
|---------------------------------------|------|
| Motor Runs on Power from Atmosphere. | 116 |
| Sportster Built in Basement | 130 |
| Midget Brains for Mechanical Men | .134 |
| Super Service for Truckers | 140 |
| How Electric Blankets Work | 148 |
| N. Y. Pier Rode 35 Miles to Its Berth | 150 |
| What Jets Have Done to Our Air Power. | 158 |
| Week-End Railroad Run Like Real One. | .163 |
| | |

Mechanics & Handicraft

Departments

| Letters 1 | 8 |
|------------------------------------|---|
| I'd Like to See Them Make13 | 3 |
| New Ideas from the Inventors13 | 7 |
| What's Cooking for Cooks15 | 2 |
| P. S. Last Minute News and Notes17 | 6 |
| Hints from the Model Garage19 | 9 |
| Craftsmen in Uniform21 | 6 |
| Keeping the Home Shipshape21 | 8 |
| New Shop Ideas24 | 0 |
| New Tools24 | 2 |

NEXT MONTH Using the Portable Saw



It's the tool that is catching the eyes of pro and amateur carpenters alike. Edwin M. Love tells of its "on the job" abilities and gives tips on using and caring for a portable saw in next month's PSM.

Take a tip from "Mr. Industry"



E. V. RICKENBACKER
President and General Manager of
Eastern Air Lines



Eddie Rickenbacker cashed in on an I. C. S. course and natural leadership to win the top man of industry title for 1951.

Mr. Rickenbacker took an I.C.S. course in automotive engineering when he was a kid working in a bicycle shop. That was the start of the famous Rickenbacker formula for making opportunity, being ready when it came. Last year a Forbes Magazine survey—polling business executives, securities analysts and others in the world of finance—found him top man of industry for 1951. Of total votes received, his name led all others.

Hero of two world wars, top-drawer racing driver and automotive engineer, the hard-won success of the dynamic head of Eastern Air Lines is an inspiration for all who have the determination to get ahead and the intelligence to go about it in the right way. Think through, then follow through.

To make your opportunity—to be ready when it comes—obtain specialized training through I.C.S. With more than 400 courses to choose from, it's easy to increase your knowledge and aptitudes. Fill in and mall the coupon below today!

INTERNATIONAL CORRESPONDENCE SCHOOLS BOX 7613-N, SCRANTON 9, PENNA. ☐ Please send information about I.C.S. employee se send me the booklet about the course BEFORE which I have marked X; out cost or obligation in training for companies. | Stationary Steam Engineering | Stationary Fireman | RADIO, TELEVISION, COMMUNICATIONS | General Radio | Radio Operation | Radio Servicing—FM Heating Steam Fitting Air Conditioning Electrician BUSINESS CIVIL, STRUCTURAL COllege Preparatory ENGINEERING Covil Engineering Structural Engineering Structural Drafting Highway Engineering Mechanical Engineer ART ART Commercial Art Magazine and Book Illustrating Cartooning Show Card and Sign Lettering Fashion Illustrating ENGINEERING Civil Engineering Structural Engineering Structural Engineering Structural Drafting Highway Engineering Reading Blueprints Concrete Construction Sanitary Engineering DRAFTING Aircraft Drafting Aircraft Drafting BUSINESS Business Administration Certified Public Accountant Accounting Bookkeeping Stenography and Typing Radio S. Television Engineering Fashion illustrating Electronics Telephone Work RAI L ROAD Industrial Supervision Foremanship Mechanical Drafting Machine Design-Drafting Machine Shop Prectice Tool Design Industrial Instrumentation Foremanship Foremanshi Secretariai Federal Tax Business Correspondence Personnel and Labor Relati Advertising Retail Business Managem DRAFTING Aircraft Drafting Architectural Drafting Electrical Drafting Mechanical Drafting I Structural Drafting I Sheet Metal Drafting Diesel Locomotive and Refinishing Diesel—Gas Engines AVIATION пΰ ronautical Engineering Jr. craft Engine Mechanic Industrial Instru Railroad Adm Retail Business Managing Small Busin | Sales Management | Sales Management | Traffic Management | CHEMISTRY | Chemical Engineering | Chemistry | Analytical Chemistry | Petroleum—Nat'l Gas | Pulp and Paper Makin | Plastics oneet Metal Drafting Mine Surveying and Drafting ELECT RICAL Reading Blueprints Toolmaking Gas—Electric Welding Heat Treatment—Metallurgy Sheet Metal Work Sheet Metal Pattern Drafting Refrigeration POWER LOOP LOOP Registering Woolen Manufectu Loom Fixing Finishing and Dye Textile Designing HOME ARTS Electrician Electrical Maintenance Electrical Drafting Electric Power and Light er and Mill Work Petroleum—Nat'l Gas Pulp and Paper Making Lineman HIGH SCHOOL mbustion Engineering esel—Electric actric Light and Power Working Hours_ A.M. to. Special tuition rates to members of the Armed Forces, Canadian residents coupon to International Correspondence Schools Canadian, Ltd., Montreal, Canada.

Same wiresmany more voices

Connecting new multi-voice system to openwire lines, near Albany, Georgia. With new system, 150,000 miles of short open-wire telephone lines can be made to carry up to 16 simultaneous messages economically.



MUCH of your Long Distance telephone system works through cable but openwire lines are still the most economical in many places. Thousands of these circuits are so short that little would be saved by using elaborate carrier telephone systems which are better suited for long-haul routes. But a new carrier system . . . the Type O designed especially for short hauls . . . is changing the picture. It is economical on lines as short as 15 miles. With Type O thousands of lines will carry as many as 16 conversations apiece.

Type O is a happy combination of many elements, some new, some used in new ways. As a result, terminal equipment takes up one-eighth as much space as before. Little service work is required on location; entire apparatus units can be removed and replaced as easily as vacuum tubes.

Moreover, the new carrier system saves copper by multiplying the usefulness of existing lines. For telephone users it means more service... while the cost stavs low.



Repeater equipment is mounted at base of pole in cabinet at right, in easy-to-service position. Lefthand cabinet houses emergency power supply. System employs twin-channel technique, transmitting two channels on a single carrier by using upper and lower sidebands. A single oscillator serves two channels.

BELL TELEPHONE LABORATORIES

Improving telephone service for America provides careers for creative men in scientific and technical fields







With Your 235 FREE STAMPS Will Come This Complete Stamp Collector's Outfit:

- Stamp Album with spaces for 3500 stamps.
- Book on "How to Collect Postage Stamps," Has many fascinating stamp stories.
- Magnifying Glass to de-tect valuable details.
- Special Watermark Detec-tor; guards against" fakes."
- 250 Gummed Hinges to attach stamps in album,

STAMP COLLECTING opens up new worlds of fun, profit, and ad-venture to you. Many successful peo-ple collect stamps—presidents, kings, executives, movie stars, explorers, athletes, etc.

Now it's EASY to get started.
Right WITH the 23 Free Stamps of Complete Stamp Collector's Outfit.
If you decide to keep it, it's ONLY
ONE DOLLAR. But if you DON'T
think it's a big bargain, send it back
-we'll retund your dollar AND -we'ii refund your de YOUR POSTAGE, TOO!

The Outfit contains the five items at left . . . EVERTHING YOU NEED to start a stamp collection that can grow in value for the rest of your life!

Examine Kit for 7 Days Without Risk!

Mail coupon and \$1 now. The complete Outfit—together with the 235 Free Stamps and other interesting offers—will be sent interesting offers—will be sent ighted, return the coupon of the

ALSO FREE while supply lasts!

| 00000 | Market Samuel | te |
|----------|------------------------|-----|
| ~~~~ | · ABBOOM MANON | h |
| A LEGION | CONTRE LE ROCCHE PRANT | } s |
| 1 | 100 | 3 1 |
| 0 | 200 | 3 8 |

| Satomna lumed by Ger- |
|--|
| stamps Issued by Ger- nan-Occupied France |
| o popularize idea of |
| folunteer Frenchmen |
| eiping Nazis fight |
| oviet Russia. This |
| et (now obsolete) |
| nuch sought after! |
| REE while supply |
| asts even if you de- |
| ide NOT to keep |

Dept. PS-10, LITTLETON STAMP CO., De Littleton, New Hampshire

arrietton, New Hompshire
Send, me. Filez, 225 foreign stamps-and a set
send me. Filez, 225 foreign stamps-and a set
state, Also send for 7 der Aven Complex
Stamp Collector's Outfit.
I. enclose \$1\$ as a deposit, After 7 days examinaMUNIST STAMPS which. I may keep First, and
WINIST STAMPS which. I may keep First, and
voil key foreign stamps of the first of the first

| Name | |
|---------|-------|
| Address | |
| Clty | State |

TO INTRODUCE THESE DISTINGUISHED RECORDINGS OF "200 YEARS OF AMERICAN MUSIC" THE AMERICAN RECORDING SOCIETY OFFERS YOU...

One of these superb 331/3 rpm 10" Long-Playing Unbreakable Records

Regularly **\$**

00

YOURS FOR ONLY

"INDIAN SUITE" by Edward MacDowell

Ever since its first performance by the Boston Symphony Orch, in 1896 this melodic suite has been a great concert hall favorite throughout the world. Each of its five sections is based on genuine Indian themes—legends, festivals, war dances, romances, sorrows.

"4th SYMPHONY" by Howard Hanson

The deeply expressive Pulitzer Prize-winning work by one of America's foremost composers. Since its premiere on Dec. 3, 1943 by the Boston Symphony Orch., it has been regarded as one of the noblest works ever written by an American'' (Serge Koussevilkey).



ARE THE RECORDS EXPENSIVE?

No, to the contrary. These recordings, which are pressed for the Society by the custom department of RCA Victor are priced below most L.P.'s of comparable quality—only \$4.35 for 10" records, and \$4.95 for 12" records. The A.R.S. Philharmonic Orch. engages the finest artists, and all recordings are made with the latest high-fidelity equipment, and pressed from a limited number of silver-sputtered masters.

SINCE the last war a great musical awakening has electrified the music-loving world-a sudden realization that the foremost music being written today is American music-and that American composers have been writing enjoyable melodies, important music for the past 200 years!

Now, an ourstanding musical organization has embarked on a program of creating high fidelity recordings of 200 years of American music. Every form of musical expression is included in this program-symphonic, choral, instrumental and chamber works, folkmusic, theter music ., music of America at work and at play; music of America growing, laughing ... music of opposition of the love of light of the love of low of light of the love of good living and the love of God. Whatever your tastes—here is music for you!

HOW THIS MUSIC CAME TO BE RECORDED

Recently, the directors of the renowned Alice M. Disson Fund of Columbia University awarded a substantial grant which made possible the founding of the American Recording Society, whose sole purpose is to record and release each month a new full-frequency recording of American music, on Long Playing records.

HOW THE SOCIETY OPERATES
Your purchase of either of the Long-Playing records offered

Your purmase of either of the Long-Playing records offered above for only \$1.00 does not obligate you to buy any additional records from the Society—ever! However, we will be bership Each month, as an Associate Member, you will be offered an A.R.S. recording by an American composer, at the special Club price. If you do not wish to purchase any particular record, just return the form provided for that purpose.

FREE RECORDS OFFERED

With each two records purchased at the regular Club price you will receive an additional record of comparable quality absolutely free! However the number of records which can be pressed from silver-sputtered masters is necessarily limited, so mail the coupon below at once!

AMERICAN RECORDING SOCIETY, 100 AVENUE OF THE AMERICAS, N.Y. 13, N.Y.

| AMERICAN RECORDING SOCIETY, Dept. 750, 100 | Ave. of the Americas, New York 13, N.Y. PS10 |
|---|---|
| Send me the record checked at the right, for which I en- close \$1.00. As an Associate Member in the American Recording Society, I will receive the Society's publica- tion which will give me advance notice of each new monthly Society Long-Playing selection which I may pur- chase at the special Membership price of only \$4.95 for | (CHECK ONE) ☐ INDIAN SUITE by MacDowell ☐ 4th SYMPHONY by Hanson |
| 12" records, \$4.35 for 10" records plus a few cents for U.S. tax and shipping, However, I may decline to pur- | Name |
| chase any or all Society records offered. With each two recordings I do purchase, you will send me an additional record, absolutely free. | CityZoneState |
| Canadian Address: OV | VEN SOUND, ONTARIO |

Date Changes AUTOMATICALLY EVERY DAY

AMAZING New WATCH WITH MECHANICAL BRAIN

olt "Remembers" olt Tells Time olt Tells Date

URES SPEED . MEASURES DE . RECORDS UP TO 12 HOUDVER 40 QUALITY FEATURES.

Swiss Movement, Accurate, Dendable. Push-Button Stop and

Start. Red Sweep-Secand Hand. Unbreokoble Crystol. Triple Chrome Plated Case. Shock Resistant. Nite-Vue Rodium Glaw Dial. Anti-Magnetic. Times Shop work. Times Phatography. ports. Times Races. Times Lab. wark. Planes. Expansion Band Included.

PLUS 90c

SEND NO MONEY

ORDER BY MAIL

Save 10 50%

WITH THESE

SENSATIONAL BARGAIN BUYS

Clip and Mail This Coupon NOW For 10 DAY TRIAL FREE

New ELECTRONIC WALKIE-TALKIE Communication System

Perfect for room to room, house to garage, etc. No batteries, no tubes. Complete two way telephone system. Works at amazingly long distances. Handy pocket size. Electronic voice powered. No license or permit needed. Two units com-



WITH FAMOUS AMERICAN OPTICAL 3-POWER LENSES

ORDER AT OUR RISK.

with 24 rustproof, solid

ALUMINUM DRAWERS Offers up to 72 compartments!

Offers up to 72 compariments!
This handy cabinet has aluminium hamThis handy cabinet has aluminium hamthe state of the marring.

SPECIFICATIONS Height 12 inches Width .. . 121/2 inches Depth 6 inches Max. inner compartments..72

SEND NO MONEY

The Cabinet of 1001 Uses in Home or Shop

Products Dept. 610 oung

purchase ŏ

YOUNG PRODUCTS DEPT. 610 2605 Elimberst, Detroit 6, Mich.

OCTOBER 1952 9



SEE AND HEAR THE "MIGHTY MIDGET" AT THESE DEALERS!

ALABAMA Greenwald Spec., 58 S. Roy. St., Mobile

CALIFORNIA

Scott Radio Supply, 266 Alamitos Ave., Long Beach Montgomery Ward & Co., Oakland Elec. Sup. Co., 140 11th St., Oakland Dew Radio Supply Co., Pasadena SAN FRANCISCO S.F. Pasadena

S. F. Rad. & Sup., 1282 Markel St., Tel. Radio Supply Co., 408 Market St.

COLORADO Montgomery Ward & Co., Denver

WASHINGTON, D. C. Cun Radio, 938 "F" St., N. W.

Sun Radio, 938"F FLORIDA Electron.Eng., 3403 Flagler Ave., Key W. Electron. Sup., 61 N'eas19th St., Miami Flagler Rad., 1068 W. Flagler St., Miami Herman Radie Supply Co., 1365 N. W.

23rd St., Miami Grice Radio & Elec. Supplies, 358-60 E.

Wright St. Pensacola
Sam Long Communications, Albert
Whited Airport, St. Petersburg
Geddard Distribulors, Inc., 1309 N.
Dixie Highway, W. Palm Beach

GEORGIA

GEORGIA Specialty Distributing Co., Inc. 104 Pine Ave., Albany 425 Peachtree St., R. W., Atlanta 644 Reynolds St., Augusta 513 Arch St., Macon 223 E. Broughton St., Savannah Prestwood Electronics Co., 708 Reynolds St. Augusta

St., Augusta

ILLINOIS

Allied Rad., 833 W. Jackson Blyd., Chi. J. G. Bowman Co., 515 E. 75th St., Chi. Newark Elec., 223 W. Madison St., Chi. Hudson, Ross, 111 W. Jackson Blyd., Chi. Montgomery-Ward & Co., Chicago, Ill.

IOWA World Radio Laboratories, Inc., 740 W. Broadway, Council Bluffs

LOUISIANA Radio Parts, Inc., 807 Howard Avenue, New Orleans olumbia Radio & Supply Co., 3940 3rd St., New Orleans Southern Radio Supply Co., 1900 Tulane Ave., New Orleans

MAINE

Henry D. Burrage & Co., 92 Exchange St., Portland House-Sherman, 442 Main St., Rockland

MARYLAND

Montgomery-Ward & Co., Baltimore Radio Electric Service Co., 3 N. Howard St., Baltimore

MASSACHUSETTS
Boston Ship Serv., 230 Stale St., Boston
Hatry & Young of Mass., Inc., 811
Boylston St., Boston
Radio Shack Corp., 167 Washington St.,

Radio Wire Television, Inc., 110 Federal St., Boslon

Radio Electronic Sales Co., 52 Chandler St., Worcester MICHIGAN

Purchase Radie Supply, 605 Church St., Ann Arbor M. N. Duffy & Co., 2040 Grand River Avo. West, Detroil

Reno Radio, 1314 Broadway, Detroil MINNESOTA

Lew Bonn Co. 228 E. Superior St., Duluth 1211 LaSalle Ave., Minneapo 141-147 W. 7th St., St. Paul Montgomery Ward & Co., St. Paul

MISSOURI MISSOURY Burstein-Appleboe Co., 1012-1014 McGee St., Kansas City Montgomery Ward & Co., Kansas City Radiolab, 1612 Grand Ave., Kansas City Walter Ashe Rad., 1125 Pine St., St. Louis

NEW HAMPSHIRE Evans Radio, 10 Hills Ave., P. O. Box 312. Concord **NEW JERSEY**

Davega Stores, Inc. 325 Main St., Hackensack 2839 Hudson Blvd., Jersey City

110 Market St., Newark 373 George St., New Brunswick 185 Main St., Paterson

NEW YORK Fort Orange Radio Distributing Co., 904 Broadway, Albany Montgomery Ward & Co., Albany Adirondack Radio Supply, 32 Guy Pack

163-24 Jamaica Ave., Jamaica

163-24 Jamaica Ave., Jamaica 96-70 Queens Blvd., Rego Park, L. 1. 175 Main St., White Plains, L. I. 27 Main St., Yonkers 141Iman of Ilhaca, 123-127 S. Tioga St., P. O. Box 306, Ilhaca Harrison Radio Corp., 172-31 Hillside Ave., Jamaica

in Radio & Electronic Equip., 119 Johnson Madio & Electronic Equip., 119
Hunt Road, Jamestown
Warren Rad., 31 Ferrest Ave., Jamestown
Radio Equipment Corporation
147 Genesee St., Buffale
5 Cenier St., Batavia

1363 Pierce Ave., Niagara Falls W. E. Berndt, 653-655 S. Warron St., Syracuse

Jectronic Lab. & Supply Co., 1415 Oriskany St., West Utica

NEW YORK CITY

Davega Stores, Inc., 63 Cortlandt St. Harrison Radio Corp., 10 W. Broadway Maritime Radio Corp., 24 Whilehall St. Nat Unger Inc., 168 Greonwich St. Terminal Radio Corp., 85 Cortlandt St.

OHIO Selectronic Supply, Inc., 1013 Jefferson Ava., Tolede

OKLAHOMA Radio Supply, Inc., 724 N. Hudson St., Oklahoma City Radio, Inc., 1000 S. Main, Tulsa

OREGON Vertectors
United Radio Supply, Inc., 179 W.
Eighth St., Eugene
Meier & Frank, Fifth & Aldon, Portland
Montgomery Ward & Co., Portland
Pacific Stationery, 414 S. W. 2nd Ave.,

United Radie Supply, Inc., 22 N. W. 9th at Burnside, Pertland

PENNSYLVANIA Warren Radio, 12th & State St., Erie George D. Barbey Co., Inc. 29 E. Vine St., Lancaster

821 Quontin Rd., Lebanon 111 N. Washington St., Pottstown 2nd & Penn St., Reading

Cameradio, 1119-1121 Penn Ave., Pitts-Radio Parts Co.

Radio Parts Co.
29 Liberty Ave., Pittsburgh
6339 Penn Ave., Pittsburgh
General Radio & Refrigeration, 1013
Capouse Ave., Scranton
Electronic Sales & Service, 734 Market

St., Sunbury General Radio & Electronic Co., 396-398 S. Main St., Wilkes-Barre

TEXAS

Corpus Christi Crabtree's Wholesale Radio, 2608 Ross Ave. Dallas Monigomery Ward & Co., Fort Worth Radio Parts, 902 Crawford St., Houston

VIRGINIA Radio Equip., 821 W. 21st St., Norfolk Radio Sup. Co., 711 Granby St., Norfolk Rad. Sup., 3302 W. Broad St., Richmond

WASHINGTON Radio Products Sales Co., 1214 First Avenue, Seattle

WISCONSIN Samsons, 222 E. Erie St., Milwaukee





If your heart is set on a larger income and all that it means ... better home-fine car-larger bank account-more of the good things

If that's your ambition and you are really serious about it, then you owe it to yourself to get the REAL FACTS about Accountancy, and the many good-pay opportunities that can be YOURS through LaSalle's famous Problem Method

It matters not whether you've had a single day of experience in this field-or whether you have already started but want to climb higher. LaSalle's expert training is designed to take you from where you are . . . to where you want to be . . . in higher positions and a lifetime career of security and good income.

WHY YOU CAN'T FAIL TO GAIN

You see on this page a panel of experts who know Accounting from A to Z . . . all the way from simple bookkeeping, on up through advanced accounting, cost account ing, auditing, income tax, and coaching for the C.P.A. degree. These are only part of LaSalle's instruction staff. But what is most important to you . . .

... THESE C.P.A. EXPERTS KNOW HOW TO IMPART THEIR KNOWLEDGE TO OTHERS ... HOW TO HELP YOU PREPARE QUICKLY YET THOROUGH LY FOR SUCCESS IN THIS VERY LUCRATIVE FIELD The proof? What stronger proof could there be than

Public Accountants (approximately 10% of the U.S. total) who have trained with LaSalle? Or the hundreds of thousands of men and women whom LaSalle has

more than 3,500 Certified

helped qualify rapidly for more money, a brighter future, in a highpay-lifetime career? These thousands came to us with different backgrounds of experience and varying degrees of ambition. Many have reported raises and promotions after only a few weeks of training. Thousands of them have written to say they are now earning 50% more-even double their former incomes—often in less than a year. These letters are published in book form for your inspection, They were written by real people, with real income, problems and ambitions-people who might be your next-door neighbor.

Yes, if you are really sincere in

prepare for fast promotions and bigger pay. They can do the same for youl

SEND FOR FREE SAMPLE LESSON...ALSO BIG 48-PAGE BOOK OF LATEST INFORMA-TION ABOUT CAREER OPPORTUNITIES

You don't have to wonder what LaSalle's Accountancy plan is like. You will be sent a free sample lesson, which does not obligate you in any way. Study it-keep it -see for yourself how simple, clear, and easy it is to master. This is an actual lesson right out of the regular training-to show you exactly how LaSalle's Problem Method has trained more than 1,275,000 men and women from all walks of life.

Also . . . the 48-page book. "Accountancy, the Profession That Pays," gives all the latest facts about the new and growing oppor-tunities in five different fields of profitable employment.

This can be an important day in

| start a life and h | your income climbing—enjoy time career of high standing high reward—this friendly staff perts can help you. | below has sta thousands of toward a bigg | oupon like the of arted hundreds of men and wome er job, a larger in the same for yo |
|--------------------------|--|--|--|
| FREE 4 | B-PAGE LA SALL EXTENSION UNIVE | E | FREE SAMPLE LESSON |
| | A Correspondence Instit 417 S. Dearborn St., Dept. 1083H | lution I, Chicago 5, III. | RIGHTE ACCOUNTANCE |
| 1 | Send free Sample Lesson in Accountifree book, "Accountancy, the Professiall without cost or obligation. | ng—also, 48-page on That Pays'' | * President Accounting |
| NTANCY | Name | | 9 |
| | City & Zone | State | Lafelle Setanti |

OCTOBER 1952 |

New RCAVictor record changer ____easiest to play at all three speeds!



World's simplest 3-speed changer, this versatile "Victrola" combines new playing ease with the finest reproduction of sound. And it changes "45" records correctly, on the same turntable used for other speeds.

Key to this advance is RCA Victor's slip-on "45" spindle, which fits over the permanent spindle and locks in place. No plugs or extra gadgets. Simply stack your "45" records on this fine instrument, and play up to fourteen of them—in the order you select—at the twist of a knob. Then, when you wish, remove the

"45" spindle, flick the needle and speed controls, and the same "Victrola" changer will play records automatically at 33½ or 78 rpm.

More than a year of research and engineering went into developing this versatile changer—further evidence of the leadership which assures you finer performance in any product or service of RCA and RCA Victor.

See the latest in radio, television, electronics at RCA Exhibition Hall, 36 West 49th Street, N.Y. Admission is free. Radio Corporation of America, RCA Building, Radio City, New York 20, N.Y. Timks.



RADIO CORPORATION OF AMERICA

World leader in radio-first in television

AUDELS HANDY BOOK OF PRACT TICAL ELECTRICIT orkers. A quick, simplified, ready reference book, giving complete instruction & practical



INFORMATION ON rules and laws of electricity-maintenance of elec-trical machinery-A.C. and D.C. motors – arma-ture winding and repoirwiring diagrams—house wir-ing — power wiring — cable splicing — meters — batteries — transformers — elevators — - tronsformers - elevotors - electric crones - rollways - bells - sign floshers - telephone-ignition-rodio principles - refrigeration - oir conditioning - oil burners - air compressors - welding and many modern opplications explained so you can understand.

. INSIDE TRADE

PER

understand.

APPARES 4 Indexed for ready reference. To get this customer for your feet and the substantial fe



S Carpenters **Builders Guides** 4 vols.\$6



Inside Trade Information On:

How to use the steel square—How to fite and set save—How to build furniture—How to use to use



AUDEL, Publishers, 49 W. 23rd St., New York 10, N. Y Audets Carpenters and Builders Guides, 4 vols., on 7 days from H OK I will remit \$1 in 7 days and \$1 monthly until \$6 is paid.

| Mame | |
|-------------|------|
| Address | |
| Occupation | |
| Employed by | \$10 |

1800 PAGES

This Big Practical Book gives full information with working diagrams covering the principles, construction, igni-tion, service and repair of modern cars, trucks and buses.

Diesei Engines, Hydramatic & Fluid Drives Fully Explained. A complete Guide of 1800 pages, with over 1500 litustrations show-ing inside views of working parts, with instructions for service jobs

IT PAYS TO KNOW

How to fit pistons—How to locate engline knocks, How to fit connecting rod bearings—How to structure mainbearings—How to recondition valves—How to time valves—How to adjust fan beits— How to adjust carburetors and chokes. How to rebuild a clutch—How to service automatic transmis-sions—How to service brakes—How

sions—How to service brakes—How to adjust steering gear—How to cope with ignition troubles—How to serv-ice distributors—How to time igni-tion—How to "tune up" an engine.

COMPLETE . PAY \$1 A MO. TO GET THIS ASSISTANCE FOR YOURSELF SIMPLY FILL IN AND MAIL COUPON TODAY.

Step up you rown skill with the facts and figures of your trade. Audels Mechanics Guides contain Practical Inside Trade Information in a flandy Form. Fully Illustrated and Easy to Understand, Highly Endersed, Check the book you want for 7 DAYS FREE EXAMINATION. Send No Money. Nothing to pay postman.

AUDEL, Publishers, 49 W. 23 St., NEW YORK



2.0

Check NOW!

> You Can Look Over Any Guide In Your Own Home _

Start the Easy Payments If Satisfied

MAIL THIS TODAY



AUDEL Publishers, 49 W. 23 St. 10, N. 1.

AUDEL Publishers, 49 W. 23 St. 10, N. 1.

The control of the control

MARINE ENGINEERS HANDY BOOK, 1258 Pages
SHIPFITTERS NAMED BOOK, 2950 Pages
REFRICERATION & AIR Conditioning, 1200 Pgs.
MILLWRIGHTS & MECHANICS DUIDE, 1200 Pgs.
MILLWRIGHTS & MECHANICS DUIDE, 1200 Pgs.
PORTINEERS & FIREMERS CAUCE, 125 Pages
PORTINEERS & FIREMERS & AIR COMPRESSOR, 1558 Pg
MINES, Hydraulies & AIR COMPRESSOR, 1558 Pg
ENGINEERS & LIBRARY (3 Book Set)
MCEMANICAD, DOITOINARY, 359 Pages
AIR CHANGES DUITOINARY, 359 Pages
AIR CHANGES DUITOINARY, 350 PAGES
AIR CHANGES
AIR

| U | |
|----------|--|
| | |

| i . | · | |
|------------|---|-----|
| Address | | |
| Decupation | | 810 |

Don't put in a drop of Anti-freeze



It's a safe, easy way to prevent clogged radiators that waste anti-freeze, cause trouble and expense

Now, before freezing weather sets in . . . before you put in anti-freeze . . . it's time to clean out your cooling system. Du Pont Cleanser makes the job safe, simple and thorough. You can even let the cleanser work while you're driving. And neutralizer is included in the can for a complete job. Du Pont Cleanser removes all rust—without reverse flushing, without fuss. Get an economical can at your service station or auto supply store today.



Insure against leaks that waste anti-freeze with

DU PONT COOLING SYSTEM SEALER

Don't let radiator leaks rob you of anti-freeze. Seal it in with Du Pon't Cooling System Sealer. Even when the cooling system is apparently water-tight, many permanent anti-freezes will "creep" and be lost by seepage through tiny pinholes. Such leaks are stopped immediately by Du Pont Sealer. It's simple to use, flows with the water and can't clog, or harm hose or metal parts.





BETTER THINGS FOR BETTER LIVING ... THROUGH CHEMISTRY

INVENTORS

Learn how to protect your invention. The U. S. Patent Laws provide that any new and useful art, machine, article of manufacture, or composition of matter, or any new and useful improvement thereof, may be patented if the act of invention is involved. Therefore, every inventor with a valuable invention should take advantage of the Patent Laws and proceed for patent protection in order to safeguard his rights.

A patent gives the inventor the exclusive right to prevent others from making, using, or selling the invention claimed in the patent for a period of seventeen years.

The Patent Laws were enacted for the benefit of the inventor to give him protection for the features of his invention which are patentable. These features must be properly and concisely set forth and claimed in a formal application for patent, in order to comply with the requirements of the Patent Laws. For that reason, unless the inventor is familiar with patent matters, he should engage a competent registered patent attorney or agent to represent him. We are registered to practice before the U. S. Patent Office and are prepared to serve you in the handling of your patent matters.

A specially prepared booklet entitled "Patent Guide for the Inventor", containing detailed information with respect to patent protection and procedure, together with a "Record of Invention" form will be promptly forwarded to you without obligation upon request.

CLARENCE A. O'BRIEN & HARVEY JACOBSON

Registered Patent Attorneys

22-K DISTRICT NATIONAL BUILDING
WASHINGTON 5. D. C.



WERE the great personages of the past victims of a stupendous hoax? Could such eminent men of the ancient world as Socrates, Pericles and Alexander the Great have been deluded and cast under the spell of witchcraft - or did the oracles whom they consulted actually possess a mysterious faculty of foresight? That the buman mind can truly exert an influence over things and conditions was not a credulous belief of the ancients, but a known and demonstrable fact to them. That there exists a wealth of infinite knowledge just beyond the border of our daily thoughts, which can be aroused and commanded at will, was not a fantasy of these sages of antiquity, but a dependable aid to which they turned in time of need.

It is time you realized that the rites, rituals and practices of the ancients were not superstitions, but supterfuges to conceal the marvelous workings of natural law from those who would have misused them. Telepathy, projection of thought, the materializing of ideas into helpful realities, are no longer thought by intelligent persons to be impossible practices, but instead, demonstrable sciences, by which a greater life of happiness may be had.

One of America's foremost psychologists and university instructors, says of his experiments with thought transference and the powers of mind-"The successes were much too numerous to be merely lucky hits and one can see no way for guessing to have accounted for the results." Have you that open-minded attitude of today which warrants a clear, positive revelation of the facts of mind which intolerance and bigotry have suppressed for years? Advance with the times; learn the truth about your inherited powers.

Let this free book explain

The Rosicrucians (NOT a religious organization) have been leaders in introducing the ancient wisdom of mental phenomena. Established throughout the world for centuries, they have for ages expounded these truths to those thinking men and women who sought to make the utmost of their natural faculties. Use the coupon below-avail yourself of a pleasing book of interesting information which explains how you may acquire this most unusual and helpful knowledge.

The ROSICRUCIANS

| (AMORC) |
|--|
| USE THIS COUPON |
| Scribe: I.R.H. The Rosicrucians, AMORC San Jose, California I am sincerely interested in knowing more about this unseen, vital power which can be used in acquiring the fullness and happiness of life. Pleass send me, without cost, the book. "THE MASTERY OF LIFE." which tells me how to receive this information. |
| Name |
| Address State |

INVENTORS

If you believe that you have an invention, you should find out how to protect it. The first step is to have a search made of the prior pertinent U. S. patents. If a report on this search indicates that the invention appears patentable you can apply for a patent, and the specifications and claims should be prepared.

The firm of McMorrow, Berman & Davidson, with offices in Washington, D. C., is qualified to take the necessary steps for you. We can make a preliminary search on your invention, advise you whether we think it can be patented, and prepare your application for patent.

Unless you are fully familiar with the U. S. Patent Laws, we recommend that you engage the services of a Registered Patent Attorney to protect your interests. The patent laws are your laws. A patent gives you the right to prevent others from making, using or selling the invention claimed in your patent for a period of 17 years.

Use these patent laws for your protection. Investigate whether your invention can be patented. If you have what you believe to be an invention, we suggest that you have this firm make a search for you.

Send for a copy of our Patent Booklet entitled "How To Protect Your Invention," containing information about patent protection and patent procedure. Along with this we will also send you an "Invention Record" form, for your use in writing down and sketching details of your invention. We will mail them promptly. No obligation. They are yours for the asking.

McMORROW. BERMAN & DAVIDSON

Registered Patent Attorneys

PATENTS • COPYRIGHTS • PATENTS
142-B VICTOR BUILDING, WASHINGTON 1, D. C.



Dept. of Interplanetary Information

I haven't seen a "flying saucer" yet, but I'm keeping my eyes peeled. If I should see some strange object blazing across the sky, what should I do about it?

C. S. COBBER, Elmsford, N. Y.

Take a picture of it if you can. In any case, report what you have seen to the nearest Air Force base. It will help if you give an estimate of the object's speed, altitude and direction of flight.

When the flying saucers were first reported seen over Washington, D. C., a couple months ago, the Air Force ordered its fighters to hunt and shoot them down.

This is a terrible mistake. These visitors can make ships that can fly from faraway planets and weapons that could surely blow up the earth. If we make them mad, they'll destroy us, but if we let them land I'm sure the results will be peaceful.

James Ross, Saginaw, Mich.

I was having dinner one night when I suddenly looked down and noticed two bright objects resembling saucers bobbing up and down in my coffee cup. I realized



then that here on a small scale was the answer to the saucer riddle—a source of light (a ceiling light behind me) and an unstable reflecting surface (the coffee).

I'm sure this is the answer to what all those people have been seeing. Maybe. MARY A. PIRIE, Pensacola, Fla. Your space scale on page 85 of the August issue should give the 95-pound boy's weight as 95 pounds even on the moon—not 14.5 pounds as shown—because the sign on the scale's face says: "No Springs-Honest Weight." This means that the scale employs a mass-balance system that would automatically compensate for the differences in gravitational force and read 95 pounds on any heavenly body.

J. A. HUSEMAN, Portland, Ore.

The scales had been adjusted by the Hayden Planetarium to show in Earth pounds what a person would weigh on the moon.

Worth Considering

In your article "Which Blowouts Are Worse?" [Aug. '52, p. 159], you seem to conclude that because rear-wheel blowouts are more dangerous drivers should keep their most-worn tires on the front wheels.



This conclusion overlooks the fact that while they may be less dangerous, front-wheel blowouts are more likely to occur since the front wheels generally carry a larger part of the load. For those who seldom carry a heavy rear-wheel load, it might be advisable to put the best tires on the front.

Bernard Rimland, State College, Pa.

TV Shows from Europe?

Will telecasts cross the Atlantic? How? And when?

ALVIN KOPPERS, Baltimore

Engineers believed until recently that TV's extremely short waves went through the electric roof from 60 to 300 miles above our heads like light through a window and got lost in space. But now they have found that very-high-frequency signals can be bounced off the ionosphere and made to land up to 700 miles from where they were transmitted. Nobody is sure yet what bounces the VHF signals back. It may take a few years to find out.

But even now there are several other



THEY NEED YOU



SEEDS VOIL COMPLETE

EMBRY-RIDDLE OFFERS YOU COMPLETE 6-MONTHS TO 2-YEAR COURSES...NOW!

Your Career is Waiting!

The high regard of Emby-Riddle training by the leading actines and the entire aviation industry is demanstrated time and again by the big demand for Emby-Riddle graduates. There's an impartant high priority job in aviation waiting for you...however, if you do enter the services, Embry-Riddle training will definitely give you rating advantages. Thousands of Air Faccemen are Emby-Riddle trained.



AIRCRAFT & ENGINE MECHANICS


Yest numbers of property trained A & E Mechanics are urgently needed. Our C.A. A. approved school with a quarter-century experience assures your quickest advancement Embry-Riddle students learn fast with modern equipment, Including jet...live aircraft, airline-size hangars.

AERONAUTICAL DESIGN AND TECHNOLOGY
Embry-Riddle's occelerated 26-ma, Aeronautical Dasign and
Technology Course provides finest training available. Technick
with management responsibility enjoy highest solaries!



COMMERCIAL PILOT

Embry-Riddle trained pilots benefit from aur years of experience with 30,000 students... the best instructors, up-ta-date aircroft, superb year-round flying weather. Also Instrument and Instructor's ratings.





TRAINING AUTHORIZED UNDER THE GI BILL OF RIGHTS

| Dean of Enrollments Dept. 91 Embry-Riddle School of Aviation Mismi 30, Florida | I am interested in A & E Mechanic Commercial Pilot |
|--|--|
| Please Print | Aeronautical Design |
| NAME | → ☐ A & E Combined with Commercial Pilot |
| ADDRESS | A&E Combined with |
| STATEAGE | Check One Voteran Non-Voteran |
| TRAIN IN MIAMI AIR CAP | ITAL OF THE WORLD |

methods under study that may make transatlantic TV feasible.

One plan being seriously considered is to build relay stations in Newfoundland, Labrador, Greenland and Iceland, with over-water hops averaging 250 miles between them. Another plan entails a string of ships in a relay line across the ocean. A third proposal is to have the television beam relayed by airplanes flying in circles over the Atlantic at 500-mile intervals and at altitudes between 30,000 and 40,000 feet. That would be practical only for special events—like Queen Elizabeth II's coronation.

Help Wanted

All my life I have wanted to live in a camp in the woods where I could hear the wind howling. Now I have the camp—but there's no wind. It's as silent as a tomb.



A 60-foot tree blew down not 10 feet from my bed and I didn't even know there was a wind blowing.

Can you tell me how I can reconstruct it so the wind will howl and shriek?

Hugh F. Kirkwood, Augusta, Me.

Any ideas?

It's the Rule-Not the Exception

I disagree with Wilbur Shaw's statement in the August issue [p. 100] that the Rolls-Royce is the only car from which you could expect 90,000 to 100,000 miles without a piston-ring job.

I have personally seen three cars with over 100,000 miles which have never had the cylinder head or crankcase removed. These cars were still running well, using no oil, and carrying good oil pressure.

EDWARD MAGNUSON, Grantsburg, Wis.

Individual cars occasionally run up performance records such as you mention, but Mr. Shaw's statement was that the Rolls-Royce was the only make of car from which you could expect 90,000 to 100,000 miles on every automobile produced. That's quite a difference.



on equipment.

ical jobs

CITY.....STATE..... OCTOBER 1952 21

Send your BIG FREE BOOK and details of your training offer. This does not obligate me and no salesman will call. I am interested in ☐ ELECTRICITY ☐ TELEVISION-RADIO NAME..... ADDRESS.....

Will her **caress test** tell tales about your hair?





The proof is in the palm of your hand!

20% more Cream Hair Oil for your money!

When she runs her fingers lightly through your hair, will you pass the test? Try your present hair tonic now, and see! Rub your palm across your hair, as she might do. Find a film of sticky oil? Think of her reaction and switch to Mennen Cream Hair Oil—lightly blended to keep each hair in place, yet never leave a trace. Contains lanolin. Helps remove dandruff scales and relieves dry scalp. Get a bottle today, and pass that caress test tonight!

MENNEN Cream Hair Oil FOR MEN



DRILL, SAW, REAM . . . metal, pipe, wood, plastic, Transite, etc. Use with any electric drill, slow ordill prest, leithe or milling machine. Drills own starting hole-upper part of bit is used to cut, sow or ream circles, evolts, squares or scrolls. Eap to aperate. Ideal for corpenters, mechanics, electricians, plumbers, hobby ists, many afters. Abrealve resulant, high speed steel. Flutes ground from solid. Will withstand severe continuous use without breaking. Retharpened of no charge. Takes place of up to \$50 in tools. ½" diameter, 2" cutting sections, total length 3½". Also ovaliables specially designed for wood or metal and in 23" and

in tools. 3" diameter, 2" cutting sections, total available specially designed for wood or metal 12" lengths. Write for details. Specify all-purpose bit. Shipped same day. Maney-back guarantee. Dealer inquiries invited.

SEND CASH., CHECK OR MONEY ORDER Manufactured and distributed by:

Manufactured and distributed by: INTERNATIONAL TWIST DRILL CORP. 618 Wyandotte, Rm. 696 Kansas City 6, Mo.





all diamonds reset in brond new modern mountings. Sold with a rritten iron-clad money back guarantee. Over 100,000 satisfied ustomers have bought diamonds from Berman's. Our reference—view own bank or any mercantle sceney.

Berman's Diamond Loan Bank

banks, unredeemed predges effected at substantial savings

Watch Repairing Pays Big Money Learn at home



Watch repairers in great demand. Train step-by-step in 10 easy lessons. We furnish all tools and 15 jewel watch and practice movement. Turn spare time into cash. A licensed school. Low cost, Send for FREE book today.

book today,
ILLINOIS SCHOOL OF WATCH REPAIRING
28/0 Eiston Ave., Dept. PS 102, Chicago 18, III.

MAKE MONEY 90 WAYS IN PHOTOGRAPHY

YOU LEARN Famous low-comethod and I trains you quick


Famous low-cost LEARN-BY-DOING method and INDIVIDUAL attention trains you quickly at home—for profitable, action-packed career, or steady,

spare-time income. Big FREE book gives full facts on more than 90 money-making opportunities in photography. Our 43rd year. Write TODAY!

Also Resident Courses. Approved for Veterans.

New York Institute of Photography DEPT. 5, 10 WEST 33 ST. NEW YORK 1, N. Y.





Do you make or mend things of wood? Then you want them to turn out relia-bly right. To succeed every time, use Weldwood Glue, Firzite and Satinlac. Ask for them at hardware, paint or lumber dealers.

Gets that blond or pickled effect-

Produce those magical "woodsy" effects - on hard wood or soft, plywood or solid lumber with White Firzite, For light pastel tones, tint with Colors-in-Oil. (On fir plywood stain jobs, tame that wild grain with Clear Firzite.)



WHITE FIRZITE®

Gets that Natural-Wood Finish

- without shellac or varnish. On furniture, panelling or woodwork, there's nothing like Satinlac, Brings out natural grain and color beauty of any plywood or solid wood. Avoids that "built-up look; will not turn yellow or darken with age. "Water-clear," easy to brush or spray, dries ready for next coat in 2 or 3 hours.



SATINLAC®

The Wood Glue you can rely on!

To make things or fix things, use Weldwood Glue for all wood-to-wood bonds. Makes joints stronger than the wood itself, Mixes easily with water. Stainfree, rot-proof ... highly water-resistant!



Pints. Quarts. Gallons

| • | - | _ | - | _ | _ | _ | _ | _ | _ | _ | _ | _ | _ |
|---|-----|------|-----|------|-----|-----|------|-----|-----|------|------|-----|---|
| | Uni | ted | 51 | nte: | s P | yw. | 00 | d C | orp | ore | atle | m, | |
| | Dan | . 12 | 2 5 | 5 W | | 44 | .h S | . 1 | May | . v. | | 3.5 | |

Send me free leaflets on Weldwood Glue, Firzite and Satintac.

PLASTIC RESIN GLUE

| N | ۸ | 44 | |
|---|---|----|--|
| | | | |

ADDRESS

ON TWO OR MORE USED TIRES

\$7.59 | 700-15 5.59 | 750-16 5.59 | 550-15 6.50 | 620-15 6.75 | 670-16

EXTRA VALUE TRUCK TIRES ONE YEAR WRITTEN GUARANTEE

Complete line of High Mileage Tires in stock, for sizes not listed. All prices F.O.B. Richmond.

MAIL ORDERS PROMPTLY THE SAFTYRE CO., INC. MOILE OF THE SAFTYR

START A SIDELIN

AT HOME-Pleasant, Spare Time Work No House-To-House Selling

Pays \$500 Profit in One Hour 9

EASY TO LEARN—It costs little to start.
Tested plan brings orders to you for metalized
Baby Shoes. You do work on equipment wefurnish. Plenty of work in every neighborhood to keep a couple making good money.



FREE Send name for details on Warner

FREE Send name for details on Warner

FREE Success Plan, No charge, Learn about this interesting, profitable homework, Business booming. Write now. WARNER ELECTRIC CO., 1512 Jarvis Ave., Dept. L-9-S, Chicago 26, III.

"HYPNOTISM REVEALED"

78 RPH Phonograph Record inducing \$5

Thought of ming already the record inducing \$5

Thought of ming already the record inducing \$5

Thought of ming already the record inducing the re



When You Use WRAP ON ELECTRIC HEATING CABLE Protects to 35° Below Zero

No more worry, expense or inconvenience cable around exceed from frozen piped Just wrap plastic coated into 115 voit outlet, Maintains low heat—fine electric blanket. Uses only small current, Thermostat turns on only when needed, No radio or TV interference, Low prices—complete with connections. Satisfaction SEPD BED HEATER. Seeds are up in 30 hours —root cuttings in 6 days. You cut germination time 2/3—transplant 2 weeks sooner. Uses house current. Thermostat control Lawy installation. Write for catalog and FREE folder on seed

bed construction

GRO-QUICK SALES

11143-3 Morang Ave., Detroit 24, Mich. Tuxedo 5-5828



How home study

DOUBLED my take-home pay!



- "A year ago I was getting the best pay I'd ever had—on paper. But it wasn't enough. Deductions cut into it. The cost of everything we bought was higher. We weren't even holding our own.
- "I had to make more money somehow, but to earn a promotion I needed training. So I mailed a coupon to I. C. S. That was the luckiest day of my life!
- "I began studying every evening at home. It wasn't easy—
 it took work. But with every lesson I knew I was getting
 ahead. The course was clear, simple, well-illustrated. It
 related directly to the job I wanted. It gave me bedrock
 facts and theory plus practical application. Every question I asked got a personal answer. I wasn't held back by
 slower classmates but could go as fast as I wanted. I. C. S.
 sent reports on my progress to the plant superintendent.
 They must have impressed him, for just cleven months
 after I started he called me in and offered me a new position that doubled my take-home pay!"

Are you taking home all the money you need? Look over the coupon below. Choose the course that fits your needs. I. C. S. has helped 5,918,632 men and women train themselves for success, and this great school can help you. Mail the coupon NOW! We'll send you full information plus free book, "How to Succeed."

INTERNATIONAL CORRESPONDENCE SCHOOLS BOX H-7615-N, SCRANTON 9, PENNA. ☐ Please send information about I.C.S. employee Without cost or obligation, please send me the booklet about the course BEFORE which I have marked X; training for companies. CIVIL, ST RUCTURAL CNGINEERING CWI Engineering Structural Engineering Structural Dratting Highway Engineering Mechanical Engineering Mechanical Engineering Mechanical Engineering ART Stationary Steam Engineering Stationary Fireman RADIO, TELEVISION, COMMUNICATIONS ☐ Heating ☐ Steam Fitting ☐ Air Conditionii ☐ Electrician A H I Commercial Art Magazine and Book Illustrating COMMUNICATI General Radio Radio Operation Radio Servicing—FM Television Electronics Telephone Work RAILROAD BUSINESS Business Administration Certified Public Accountant Highway Engineering Reeding Blueprints Concrete Construction Sanitary Engineering DRAFTING ashion Illustrating Certified Public Accountant Accounting Bookkeeping Stenography and Typing Secretar isi Federal Tax Business Correspondence Personnel and Labor Relations Industrial Engineering Industrial Supervision Industrial Supervision Foremaship Mechanical Drafting Mechanical Drafting Machine Design-Drafting Machine Shop Practice Trool Design Industrial Instrumentation Machine Shop Inspection Reading Biosprints Joan Effective Wedding Heal Treatment—Metallurgy Sheet Metal Pattern Drafting Refriseration DRAFTING Aircraft Dratting Architectural Dratting Electrical Dratting Mechanical Dratting Mechanical Dratting Structural Dratting Structural Dratting Mine Surveying and Drafting ELECTRICAL RAIL ROAD Locomotive Engineer Diesel Locomotive Air Brakes Car Insp Railroad Administration TEXTILE Personnel and Labor Relations Advertising Retail Business Management Managing Small Business Sales Management Sales manapin Traffic Management CHEMISTRY Chemistry Analytical Chemistry Petroleum—Nat'l Cas Pulp and Paper Making Plastics Aeronautical Engineering Jr. Aircraft Engine Mechanic Airplane Dratting BUILDING TEXTILE Textile Engineering Cotton Manufacture Rayon Manufacture Woolen Manufacture Loom Fixing Finishing and Dyelng Textile Designing HOME ARTS Architecture Architecture Architecture Istimating Contractor Estimating Carpenter and Mill Work Carpenter Foreman Carpenter Foreman Electrical Engineering Sheet Metal Pattern Draf Refrigeration POWER Combustion Engineering Diesel—Electric Electric Light and Power Electrical Maintenance Electrical Dratting Electric Power and Light Dressmaking and Designing Cookery Tea Room Management Lineman HIGH SCHOOL High School Subjects Working Hours_ Special tuition rates to members of the Armed Forces, Canadian residents send coupon to international Correspondence Schools Canadian, Ltd., Montreal, Canada.



A MODEAN BIG PROITI ONE-MAN BUSINESS CAN BE YOURS AT MOME - SPAR SO MAN BUSINESS CAN BE "Shop-practice" method quickly Min Time. New visual Home Freezers. Refrigerators, Vacuums. Carhage Disposals. Automatic Washers and Dryers. Motors. Fluoresten Lights, Fans. Irons-yes. even House and Industrial wiring. You can set up shop in your garage, basement, No contil heases—no hig overhead-se. Buttle bench space. No costly leases-no big overhead-no need to hire othersno selling-we show you how to make business come to you. BIG MONEY—SECURE FUTURE—INDEPENDENCE, Hundreds of plain-as-day "How-to" photos and drawing make it easy. F. V. in N. Y. says: "I made \$300 in 3 months while studying." T. E. H. in W. Va. says: "Made \$14 a day while learning."

NO PREVIOUS EXPERIENCE NEEDED. You will get, in addition to complete instructions my book, "How to Open Your Own Electric Appliance Business." It shows you how to start small and grow big. Everything furnished to help you build your own Big Profit business at home. Yes! We even supply you with appliance tester and tools! Write today for this amazing new Home Business Plantit's FREE! Send no money-just your name and address.

PACIFIC TRAINING SCHOOL, Dept. S-5210 7217 S. Broadway, Los Angeles 3, California

FREE BOOK

Your FREE cupy of "The Law Trained Max" above, how to gain prevailes and greater earnings through Blackstone home have thus; All instruction material furnished including 16-volume Law Libery written by 65 well-known is we authorities. Lawyers, judges among prevailed to the control of the co A Correspondence Institution Founded in 1890

Your first step-if you consider your invention to be something of importanceis to have a search made of pertinent, prior U. S. patents. If our search report indicates probable patentability of your invention, you may apply for a patent which gives you the right to exclude others from making, using or selling your invention as claimed for a term of 17 vears.

This firm is registered to proctice before the U. S. Potent Office and is avoilable to assist in the preparation of the necessary drawings, specification and

Ask for a copy of our instructive booklet "Patent Protection for Inventors" and our convenient "Evidence of Invention" form. No obligation.

VANS & CO. Merlin M.

740-L MERLIN BUILDING, WASHINGTON 6, D. C.

Before you make any effort to market your invention, you should take the first steps toward proceeding for patent protection.

I shall be pleased to furnish you with information relative to patent procedure upon request from you, and this will be without any obligation on vour part.

PATRICK D. BEAVERS

Registered Patent Attorney

937 Columbian Building, Washington 1, D. C.

YOU WISH TO PROTECT YOUR INVEN-TION, You should take steps to protect it by a U. S. Patent. Write me for "INVENTION RECORD" FORM

MILLER CARL REGISTERED PATENT ATTORNEY

WOOLWORTH BLDG., 35th FLOOR, 102C NEW YORK CITY

REGISTERED PATENT ATTORNEYS WRITE FOR INFORMATION TO

SNOW BUILDING. WASHINGTON 1. D.

Whether an invention is patentable can be substantially determined by a search of the U. S. Patent records. Without obligation, write for information explaining the steps you should take to secure a patent.

JOHN N. RANDOLPH Registered Patent Attorney

205 Columbian Building

Washington 1, D. C.

PATENT INFORMATION INVENTOR'S RECORD

GUSTAVE MILLER 102PS Warner Building Washington 4, D. C.

REGISTERED PATENT ATTORNEY

PATENT ATTORNEY & ADVISOR ASSOCIATE EXAMINER U. S. PAT, OFF, 1922-1929 PATENT LAWYER



vstery

- Frees Sticky Valves
- · Stops Hydraulic Valve Clatter Buy it at your favorite gas station

76 POPULAR SCIENCE



The new Sprayberry "package" plan includes many big kits of genuine, pro-fessional Radio-Television equipment. You perform over 300 demonstrations, You perform over 300 demonstrations, experiments and construction projects. You build a powerful 6-tube 2-band radio set, nutlt-range test meter, signal generator, signal tracer, many other projects. All equipment and lessons are yours to keep... you have practically everything you need to set up your own profitable Radio-Television service shop.

Earn Extra Money While You Learn!

All your 10 months of training is IN YOUR HOME in spare hours. Keep on with your All your 10 months of training is IN YOUR HOME in spare hours. Keep on with your present job and income while learning. With each training "package" unit, you receive extra plans and "Business Builder" ideas for spare time Radio-Television jobs. New telespare time Radio-Television jobs. New tele-vision stations everywhere, open vast new opportunities for trained Radio-Television Technicians—and those in training. If you expect to be in the armed forces later, there is no better preparation than practical Sprayberry Radio-Television training.

RADIO 111 NORTH CANAL ST. Dept. 550 Chicago 6, III.

YOU BUILD the Television set and the powerful superite radio re-ceiver shown above IN ADDITION to the other test units shown here. (Many are not illustrated.)

MAIL COUPON TODAY! NO OBLIGATION

I invite you to get all the facts -TO YOU 3 BIG RADIO-TELEVISION BOOKS

Rush coupon for my three big Radio-Television books:
"How to Make Money in Radio-Television."
PLUS my new illustrated Television Builetin PLUS an actual sample Sprayberry Lesson —ALL FREE. No obligation and no salesman will call. Mail coupon NOW!

SPRAYBERRY ACADEMY OF RADIO, Dept. 550 111 North Canal St., Chicago 6, III.

| u | Please rush to me all information on your 10-MONTH Radio-Tele |
|---|---|
| | |
| ı | vision Training Plan. I understand this does not obligate me and that |
| ı | no salesman will call upon me. Be sure to include 3 books FREE. |
| | |

City Zone State



5 DAY TRIAL Money Back Guarantee

The new 1883 mode BW HE Saw gives year-yound enjoyment but and boys 4 to 80 Bullety new greatly improved, made and guaranteed by BURGESS—World famous precision tool inaunifacturers. Professional looking projects are made with amazing ease and saw wood, light metal, fiber board, plastics—straight lines, curves, angles, every conceivable design! Turns out toys, lawn markers, furhost of useful things for home, garden, workshop, den. Can also be used for sanding & films.

POWERFUL BUILT-IN MOTOR - 3400 RPM

The sturdy, 110-125 volt motor rates 3400 RPM—giving plenty of pewer to spare! Has 6 foot cord, on-off switch, 3 extra saw blades, but the study of the study of



SEND NO MONEY—Try without obligation! THORESEN'S

131 West 33rd St., Dept. 7-L-37, New York 1, N, Y. RUSH the Improved 1953 model BURGESS Jig Saw complete with 8 ft., plug. 3 extra saws—on 5 DAY TRIAL, I will pay postman \$12.95 plus shipping charges on arrival. If not thrilled, you will refund full purchase price.

Address.....

SAVE shipping cost! Remit 12.95 with coupon. Same money back guarantee.

3400 RPM MOTOR



IMPROVED NEON TIMING LIGHT

For quick accurate testing & setting of ignition For quick accurate testing & setting of ignition systems. Shows up worn distributor shaft, helps locate ignition troubles. Use under actual operating conditions, Gives accurate ignition timing, synchronizes double points. Tests action of automatic spark advance. All parts casily replaced. More light output from cartridge-type mon light, 10% larger lens. Gives sharp, clear images while testing.

POSTPAID In USA Send Check or Money Order for

VACUUM AND

FUEL PUMP TESTER



Checks valves, valve springs, choked muffler, vacuum pump and tank, vacuum gear shift and carburetor. Adjust and check carburetor under actual operating conditions. Normal vacuum range shown in green; conditions such as late ignition or valve timing, leaky manifold, etc., zoned in red. Easy-to-follow instruction manual included.

POSTPAID In USA Send Check or Money Order for

COMPRESSION TESTER



Compact design permits testing in closest quarters Checks condition of valves, pis-tons, piston rings and cylinders. Universal rubber cone fits all sparkplug holes. Full 200 lb. gauge, Finger-tip valve holds read-ing until released. Complete instructions & compression chart of all cars included. compression chart of all cars included.

POSTPAID in USA Send Check or Money Order for

AUTO-AID COMPANY 4636 St. Clair PLEASE Cleveland, Ohio

HIGH-HEAT SOLDERING IRON 0 must for every work bench!

 Operates on 110 volts AC. or from 6 volt auto battery Ruggediy built for heavy

Removable, non-pitting tip Fingertip control button Heats in 10-12 seconds Special alloy heating element

Ceramic Insulation Cork handle

Iron weighs only 6 ounces Complete with transformer Reg. \$13.95 value!

Include postage for parcel post (Shipping weight 5 lbs.)

Send check or M.O. (Save C.O.D. charges)

85 CORTLANDT ST., NEW YORK 7, N.Y. phone: WOrth 4-3311

TURN RIGHT Get on the Road to a Training then You Can Really GO! AMERICAN SCHOOL, Dept. G-746, Drexel at 58th, Chicago 37, III. Without obligation, please send FREE and postpaid, full particulars about the subject checked below. Drafting—Building Trades Drafting—Machine Trades Accounting **Plastics Engineering** Air Conditioning Piumbing-Practical Electrical Engineering Architecture & Building **Private Secretary Automotive Technician** Electricity—Practical Refrigeration Electronics—industrial Better Foremanship Retail Merchandising Salesmanship-Outside Bookkeeping High School Courses **Business Management** Machine Shop Operations Sheet Metal Work Mathematics & Siide Rule Contracting **Tool Making** Diesel Technician **Mechanical Engineering**OCCUPATION...... HOME ADDRESS..... Age

START NOW by checking, filling in and mailing this coupon. You'll get full information — No cost, No obligation!

• Today, make the BIG decision of your life. Choose the career you want and take the first easy step toward your goal. Learn how you can get the training that can put you in the bigger pay class and give you security in the years ahead. Find out how, in spare time at home, you can qualify for work you prefer, and higher pay. Or if you are already in the work you like, find out how you can win quicker promotion and a larger income.

Backed by 55 Years of Training Know-How

Since 1897 American School has helped many thousands of ambitious people toward success by providing specialized training for commercial and technical advancement. Its study program for you has been prepared by experts in the subject you select and the school will give you guidance every step of the way. In time you might otherwise waste and at a cost you can afford you can prepare at home and really GO on the right road.

Don't Delay YOUR Start

Give serious thought to the list of training courses listed above. Pick the opportunity that interests you, check it and add your name and address. (Check more than one if you are undecided which appeals most.) Then clip and mail the coupon. Full information will be supplied without cost or obligation.

PRACTICAL, EFFECTIVE HOME STODY TRAINING SINCE 1897

AMERICAN SCHOOL, Dept. G746, Drexel at 58th, Chicago 37, III.

THE SOONER YOU START, THE SOONER YOUR GOAL CAN BE REACHED



YOU CAN WIN This 15" Silvar Tre as Rex Farrus Di owe EVERYTHING "I owe EVERYTHING to GREAT JOWETT METHOD,"

HEY SKINNY How would YOU

Like to GAIN

POUNDS OF 56 MIGHTY MUSCLE LIKE I DID!

Through Jowett Training

I Added 7" TO MY CHEST WHY DON'T YOU I Put 4" of STEEL LIKE MUSCLE ON EACH ARM

I've Broken All Records Beaten All Contenders for STRENGTH FEATS-WHY DON'T YOU? says REX FERRUS-Undefeated, Unchallenged Champion

"ASHAMED OF BEING SKINNY? Here's How to Da Samething About it Like Rex Ferrus Didi" Says George F. Jowett, Known as World's Greatest Builder of HE-MEN

'Champion to Become He-Man." Try night. Experi-ence the thrill-Chempions" ing strength that surges your THIS MAY BE YOUR LAST FOR CHANCE TO GET ALL 5 CKED COURSES MILLIONS HAVE w to B BEEN SOLD FOR ST AND MORE CHEST w to Bui

w to Bu

MICHTA

LEGS

BACK

w to Build

Steel-Strong Muscre Gained 24 lbs. Muscle Thanks to J Wonder Coursa Savs

Pack My Body" writes Ed L. Manfredi P

Astoria, Oregon.

MICHTY HE MAN

GRIP BOTH FREE ACTION! FOR QUICK

· BECOME A

| I. Photo | BOOK OF STRUNG MEN | 2. MUS | CTE WI | HEK |
|--|---|----------|--------|-------|
| wett Courses proofest in World for | JOWETT INSTITUTE OF PHYSICAL 220 FIFTH AVENUE, NEW YORK t. | TRAINING | DEPT. | PS-21 |
| World Inc | 220 FIFTH AVEILUE, NEW TORK L | | | |

Oeer George Please mell 10 me FREE Jowett's Photo Book of Strong Man and a Muscle Meter, plus all 5 HE-MAN Building Courses: 1. How to Build a Mighty Chest. 2. How to Build a Mighty Arm. 3. How to Build a Mighty Arm. 3. How to Build a Mighty Grip. 4. How to Build a Mighty Arm. 3. How to Build a Mighty Grip. 4. How to Build a Mighty Arm. 3. How 10 Build a Mighty Letter-how till m One Yolume "How to become a Mighty HE-MAN." ENCLOSED FIND 10°F PROSTAGE AND HANDLENG (O.C.O.") 3. E-MEN

CITY

30 POPULAR SCIENCE

PRACTICALLY WHOLESALE TO YOU

LIFETIME WRITTEN GUARANTEE Also Choice Of WERE UP TO \$59.50 GRUEN
 WALTHAM or
 ELGIN Watches **SAVE \$42.55**

You get these unredeemed LIFETIME GUARANTEED Bulova and other movements in latest style Yellow Gold Cases at tills sensationally low price because we bought out SIRPLINE INFORMS of leading New York and Md. jewelers. Order leading the control of t Free Trial Offer! Wear At Our Risk! Money back guarantee in 10 days if not delighted!

SEND ONLY \$1 plus postage. Or we pay postage if you enclose \$16.95 plus \$1.70 tax, FREE! Handsome Expansion band with orders.

RIST WATCH \$1 4.95 si.50

Maryland Distributors, Dept. 419 501 E. Baltimore St., Baltimore 2, Md., Write for Free Watch and Diamond Ring Catalog—Practically Wholesale Prices.

RADIO

You can enter this uncrowded, interesting field. Defense expansion, new developments in electronics demand frained expansion, new developments in electronics demand frained technicians. Study all phases radio & electronics theory and practice: TV; FM; broadcasting; servicing; aviation, marine, police radio. 18-month course equal in radio content to 4 yrs. college. H.S. or equivalent required. Begin Jan., March, June, Sept. Campus life. Catalog.

VALPARAISO TECHNICAL INSTITUTE

To make Crawes, Plates, Bridgework, etc. for Destricts, Rasy Proticula way to learn mechanical dentistry at home in spare time. FULL EQUIPMENT OF TOOLS AND MATERIALS, INterms. Write for FREE BOOK about this money making proression that is not affected by the machine age.

McCARRIE SCHOOL of Mechanical Dentistry 207 N. Broad Street Dept. 928 Philadelphia, Pa

Study HYPNOTISM! FASCINATING! Almost Unbellevable

PASCINATING Aimost Unsolivednie
This unusual course reveals the fundamentals of
operator, performs—how he has developed his PERICE
His domination and control, liturated instruction
Sincting row price, but national control, liturated instruction
Sincting row price, but national control, liturated instruction
Sincting row price, but national control control
COLD, plus postage, Send for "App.
PRICE
NELSON-HALL CO., 210.5. Clinton \$5.

DPI, 2-XY-1
Chicago 8, 111, 889
\$2.95



\$3,795.00 TEAR
Many Appointments TO
Be Made. Experience
Usually Not ReGuired. MEN_WOMUsually Name.... Address

Now Any AUTO REPAIR JOB Can Be a Push-Over for You!



IN LESS TIME-WITH LESS WORK-AND MORE PROFITS!

NOW, tackle anything from carburetor to rear end on ANY car built from 1935 thru 1952. And fix it quick, easy, right the FIRST time! Just look up make, model, and job in quick index of MOTOR's brand-new AUTO REPAIR MANUAL. Clear. illustrated instructions lead you step by step all the way. Covers all automatic and semi-automatic trans-

ONLY Manual of Its Kind!

The engineer-editors of MOTOR Magazine condensed all the meet of over 170 official factory manuals for you.

They dug out all the information you need-made sure every word and picture is crystal clear—and put the whole
"works" into this one big 780-page book.

Contains 225,000 service, repair, tune-up cts. 38,000 essential dimensions! More facts. 38,000 essential dimensions! More than 2400 cut-away photographs, diagrams, charts show what the clear text tells.

Win Prestige! Earn More Money! MOTOR's Manual makes every operation

so easy that you'll find yourself tackling jobs you wouldn't think of doing before. And you'll win added prestige and more money in the bargain.

Beginners will find usable helpful guid-ance on every kind of repair and service job imaginable. Experts will be amazed by the time and labor-saving short cuts.

mine and lador-saving short cuts. This GlANT Manual is used by Army, Navy, Technical Schools, and thousands of successful auto-repairmen. Now YOU can try it FREE for 7 days. Learn first-hand how it can pay for itself the first few times you use it!

SEND NO MONEY

Mail coupon below — without money! When your book arrives — make it show you what it's got! Unless you agree it's the you what it's got! Unless you agree it's ine greatest time and work saver you've ever seen-return book in 7 days and pay noth-ing. Mail coupon NOW! MOTOR Book Department, Desk 2M, 250 West 55th St., New York 19, N. Y.

bie learning anything about any car. Now working as mechanic in big plant." SAM ORDONEZ, California





"MOTOR's Manual paid for itself on the first 2 jobs, and saved me valuable time by eliminating SCHROP, Ohio

"Instructions clear have no trou-



Published by MOTOR, The Leading Auto-motive Business Magazine,

| | COUPON | NOW F | OR 7 | -DAY | FREE | TRIA |
|---|--------|-------|------|------|------|------|
| 1 | | | _ | | | _ |

MOTOR BOOK DEPT. Desk 2M, 250 West 55th St., N. Y. 19, N. Y.

Rush to me of once (check box opposite book yos wonly).

MOTOR's New AUTO REPAIR MANUAL. If 0 Ns., 1 will rentt \$1 in 7 days (plus 35c delivery charges). \$2 monthly for 2 months and a final payment of 93c one month after that. Otherwise I will return the book postpaid in 7 days. (Foreign price, \$8 cosh with order)

conn outer order.)

MOTOR's New TRUCK & TRACTOR REPAIR
remit MANUAL. (Described at left.) If O.K., I will
remit and Si monthly for 3 months,
plus 33c deliveryes, and \$3 monthly for 3 months,
wise I will return book postpaid in 7 days. (Foreign
price, remit 30 cash with order.)

Check box and save 35c delivery charge by eoclosing WITH coupon entire payment of \$5.95 for Aoto Repair Manual (or \$8 for Truck & Tractor Repair Manual). Same 7-day return-retund privilege applies.

etc. For FREE 7 - DAY
TRIAL
check box
in coupon.

stations, fleet own-

LINCWELDER

* MAKES MONEY * SAVES MONEY

WEIDS . SOIDERS CUTS . RRA7FS

CHARGES BATTERIES

Welds any thickness of metal

Pays for itself

Robert I. Maas of Custar, Ohio, says, "Just the savings in cash I made last year by repairing and building farm equipment more than paid off the cost of my "Lincwelder". Don't know how I ever got along without it."

FOR FARMS . GARAGES REPAIR SHOPS

Fast, Easy Repairs on Cast Iron and Steel



LOWEST PRICED WELDER



Dept. 204, The Lincoln Electric Company, Cleveland 17, Ohio

Above Left: Repairs spring tooth harrow with simple butt weld using "Fleetweld 47" elec-trode. Above Right: Crack in engine block is fixed in a few minutes with "Ferroweld"

- electrode. • Wide Range ... handles 1 6" to 5 6" electrodes. · Simple to Operate . . . has Arc Booster for
- no stick start . . . operates on 230 volt
- Easy to Install .
 single phase line. · Approved ... by Underwriters' Laboratories.

Built by THE LINCOLN ELECTRIC COMPANY

The World's Largest Manufacturer of Arc Welding Equipment

| Enclosed is | inewelder" AC-t80-C and accessories \$176.00. check money order ulletin on the "Linewelder" AC-180-C. |
|-------------|--|
| _ | |
| Name | |
| Address | |
| City | State |
| | 204 |
| | |

NGUAPHO for LANGUA

FRENCH. GERMAN, SPANISH RUSSIAN, JAPANESE, NORWEGIAN -29 languages available

Learn AT HOME easily, quickly, by Linguephone, World's Standard Conversational
Method. You LISTEN—you have notive menand women speak—YOU understand—YOU
SPEAK his same easy natural way you
learned English long before you went to
Gocileges; o million home-study students.

Send for REE BOOK

Approved for Veterans' Training

LINGUAPHONE INSTITUTE 147-10 RADIO CITY, N. Y. 20, N. Y.

EYE GLASSES by MAIL As low as 5195

WRITE for FREE CATALOG with 14 LENS SAMPLE CARD Thousands of Customers

QUALITY READING-MAGNIFYING OR BIFOCAL GLASSES FOR FAR AND NEAR ADVANCE SPECTACLE COMPANY. Inc. 537 S. Dearborn St., Dept. \$210 Chicago 5, Illinois

SHORTHAND leeks at Home

peedwriting

THE ART OF DRAWING

Fascinating learn-by-doing lessons in drawing, painting, illustrating and commercial art. Prepared for YOUR instruction and enjoyment in spare time at home. Purpose: struction and enjoyment in spare time at home. Purpose: To turn amateur talent into PROFESSIONAL skill. Cost? Surprisingly low, Send for FREE illustrated booklet, "Building a Future" in Art. Write today.

GRANT SCHOOL OF ART Dept. B102, 225 N. Michigan

How To Make More Money

Lean hew thousands of businessines, in every line, are business, ables in spits of conditions—with peansy messages—printed and illustrated in a few minutes on government postal cards—with amazing new Advertising Machine, the patented CARDMASTER, next morning. Not a top, but a sturdy piece of equipment, built to iast. Buy direct from manufacturer at low factory price. Guaranteed for five years.

SEEM YOUR NAME TODAY, 1948. 1899. SEEM YOUR NAME TODAY, 1948. 1948. TODAY SEEM TO SEEM

TRAIN AT HOME IN YOUR SPARE TIME OFF...MAIL TODAY! DON'T PUT IT 4000 South Figueroa St. Los Angeles 37, Californ GET THE MONEY AND I understand no salesman will call on me. SECURITY YOU'VE "MY FUTURE IN DIESEL-AUTOMOTIVE & ALLIED MECHANICS." ALWAYS WANTED! CITY

L. J. ROSENKRANZ, President, National Schools, the man who has trained many, many men like YOU. Men who now own successful, re-spected businesses of their own. Men who hold impornt, high-paying positions famous companies. You N be a success. Mail CAN be

coupon for more details

Let Me Show You How! Mail the Coupon for My FREE Books! Each book has page after page in color Gives you the complete story about my proved training method... tells how quickly it can train you for a secure, high-paying job. Don't wait. Get the facts. Send today for my valuable books on Radio-Television or Auto-motive-Diesel. Check the coupon at right and mail it to me today. Absolutely no obligation.

NO SALESMAN WILL CALL!

I'll send you a FREE SAMPLE LESSON TOO, if you act fast! Shows how easy it is to learn with National Schools Home Training.

Mail in envelope

penny postal card

Send me Free the book checked below and the sample lesson.

"MY FUTURE IN RADIO-TELEVISION & ELECTRONICS" OR

ZONE STATE Check here if you were released from the service less than 4 years ago.

______ Let National Schools - a resident-training school for nearly 50 years-train you at home for today's unlimited opportunities in Radio-TV or Automotive-Diesel, National Schools in one of the largest schools of the kind in the world. It has 4 big buildings of modern shops and labs, its faculty is considered tops. You

isbs. Its faculty is considered tops. You make the many leasons and proposed tops. You make the many leasons also conditions. Approved for eligible vets.

Earn Extra Money while you're learning! I'll show you how! **EASY TERMS • FREE GRADUATE SERVICE** Mail coupon today-find out more!

WHICH HIGH-PAYING FI

TODAY'S SHORTAGE OF TRAINED TECHNICIANS CREATES CHANCE OF A LIFETIME FOR YOU...IN EITHER FIELD!

RADIO-TELEVISION & ELECTRONICS

JOB SECURITY! BIG MONEY! FOR YOU IN TODAY'S **EXPANDING INDUSTRIES!**

Think of it! With guided missiles, radar and other electronic devices so important to national defense. With big, new developments in color TV. With over 90,000,000 how and auto radios, over 12,000,000 TV sets. With more than 3100 radio stations...over 100 TV stations—and more building every day—imagine the terrific opportunity you have! You Train at Home-In Your Spare Time

With National Schools Master Shop Home Training, you master of phases of Radio-Television-Electronics. You learn fast from hundreds of pletures and diagrams. All lessons have been developed and tested in National Schools framous shops and labs. No wonder your National Schools training is so up-to-date, practical, interesting. And so easy?

LOOK! WE SEND YOU ALL THESE PARTS! -and you keep thom!



We send you lots of standard professional parts. You do lots of practical experiments You learn step by step. Until you can build the big Superheterodyne Receiver you see above—and other important test units. Mail the coupon_totaly

I TRAIN YOU FOR GOOD-PAYING JORS LIKE THESE s sount true POR GUOD-PATING JOSS LIKE THESE
Radio Station Engineer; District Service Manager;
Alternit Radio Inspector; Inspector Technician; Ornyour onn repair shoot; Service Specialist; Septical Civil
Service Positions; Sound Truck Operator; Complete
Trousands of National Schools graduates have Jobs
like these, Why not you? Start your career-be sure
to mail the coupon today.



NR

AUTOMOTIVE-DIESEL AND ALLIED MECHANICS

GREATEST DEMAND FOR TRAINED MEN IN HISTORY! NOW IS YOUR CHANCE!

What an opportunity! With over 8 million older cars needing hig service and repair jobs. With detense industry having more high-paying jobs than they can fill. With the Armed Forces offering quick advancement to trained mechanics. YOU ARE NEEDED as never before! Now you can get the good pay, security, the satisfaction of doing what you tends to do! Don't delay—mail the coupon NOW!

Right in Your Own Home! You learn all about Gasoline Engines, Diesel and Special-Fuel Engines under the Manual Labout Gasoline Engines, Diesel and Special-Fuel Engines under the Manual Labout Carlotte Service. You get complete training for this great, growing industry Yet National Schools Home Training is easy! Because if it based on actual shop methods in National Schools big resident school. Mail the coupon for more details—NOW.

National Schools Gives You All These Tools

You start out owning the tools of your trade. A kit of standard, profes-sional tools and equipment. They're all part of your course! -And you keep them-they're yours!

I Offer You All Those! Lesson Texts, Diesel Installation & ienaace Instructions. Spare Time Les-Engine Service Manuals. Engine Re-Drive Systems. Diesel Electric Power . Special Thermodynamic Instruction,

Attention: Men Going into the Service Soon!

With National Schools training in Radio-Television or Automotive-Disels, you have the opportunity to get into special service classifications. That means higher pay and grade, more prestige—right away! This is important—so be sure to mail the coupon today without fail.



WHICH OF THESE HIGH-PAYING JOBS WOULD YOU LIKE?

WOULD YOU LIREY MOTOR TUNE UP SPECIALIST DIESEL ENGINE SPECIALIST PARM EQUIPMENT MECHANIC YOUR OWN GREEGE OR REPAIR SHOP GENERAL GARAGE MECHANIC PARTS DIALER AUTO ENGINE REBUILDING HIELL IN IECTION SPECIALISTY

You can have secure jobs like these. Just mail coupon-and find out!

NATIONAL SCHOOLS TECHNICAL TRADE TRAINING SINCE 1905

New HAIR VAC

Removes Dirt, Dust, Dandruff **Promotes Hair Health** with Electrical Massage!



NEW IDEA IN HAIR CARE!

Yes, HairVac eleans as it massages . . loosening and Yes, Hairvac eteans as it massages . Joosening and vacuuming away dirt. dust, dandruff scales, foreign matter. At the same time, its 24 vibrating rubber fingers give that healthfu massage which stimulates circulation, distributes the vital natural oils, encourages softer, better-looking hair. makes your scalp feel wonderful!

- Easy, pleasant to use. Massage brush lifts out to in-sert sanitary filter. You'li be smazed at the amount the filter catches. After use, throw filter away.
- No lotton, no water, no soap, no gooey oil—HairVac's stimulating massage keeps your scalp in naturally lubricated condition. . avoids the dangers of too frequent strong shampoos. Also lessens the dangers of catching coids in winter.
- For the ladles, HairVac saves wave-setting time, helps lengthen the life of a permanent . . makes hair eas-ier to care for, better looking.
- Very convenient for bed-patients where a shampoo is inconvenient or dangerous. Barbers use HairVac in their best scaip treatments, and to remove hair clipnings.
- Heips improve the condition, the natural good looks, of your hair. Ideal for all the family.
- Handsomely designed by Walter Dorwin Teague. Quiet, efficient. 6-foot cord. AC only, UL approved. Fully guaranteed.

Order your Hair-Vac by mail today, direct from factory. Enclose check or money order and we pay only postage. Or order COD, plus postal charges. Immediate delivery. It not fully pleased with the what Hair Vac does for your hair and scalp, lectuding measure. return at once for full refund.

REPRESENTATIVES WANTED The HairVac Co., Dept. 810 Topeka, Kansas

304 Kansas Ave.

The HairVac Company, Dept. 810

304 Kansas Ave., Topeka, Kansas additional massage brushes (for others in the fam-

| Name | |
|---------|--|
| Address | |

City and State..... 34 POPULAR SCIENCE

ily) at \$1.00 each.

MAKE EXTRA MONEY

TO MAKE

PLASTIC

LEARN AT HOME

LEARN HOW There are RICH OPPORTUNITIES for MEN and WOMEN with "know-how" in Plastics. Interstate's new Plastics course fast-selling tells and shows how to make hundreds of fast selling items out of Plastics. Gives complete training in fabrication, casting, NOVELTIES lamination, molding, internal carving, etc., in simple, easy, FURNITURE step-by-step language and pictures. Plastics and Fabricating Kits for 23 valuable Plastic items come with training at no JEWELRY SIGNS extra cost. START A PLASTICS BUSINESS OF YOUR OYS OWN. No other industry holds such promise for the TOYS elties, toys, signs, etc., in your own home in spare or full time. Don't weit! Learn NOW how Interstate's Plastics Training qualifies you for success in the Plastics field. PLASTICS AND SUPPLIES FURNISHED

FOR 23 VALUABLE PROJECTS

TERSTATE TRAINING SERVICE

WITH AN EDUCATIONAL INSTITUTION
Courses in ENGINEERING, Electrical, (Jul, Mechanical, Drafting, Architectural, Automotive, Steam, Diesel, Aeronauteal, Ing., Architectural, Automotive, Steam, Diesel, Aeronauteal, Friegeration, Altr Conditioning, Chemical, Courses in ARTS AND SGIFNCES: Philosophy; Education: Letter of the Course of the Course of the Course in ARTS AND SGIFNCES: Philosophy; Education: Letter of the Course of the Course

McKinley-Rooseyelt Incorporated, 4610-A3, Sheridan Rd., Chicago 40, Illinois



Let Ed Sais, top Radio Guitarist, teach you to play a song the very contains \$2 photos. St chord charts, etc. Shows how to tune, keep time, build chords, bass runs, dance chords, swing, etc., plus 110 Popular Songs, words and music. Surprise friends, relatives, Popularity and nur gaiore. SEND ND MONEY Just name and address to Ed Sais and pay postumen \$1.59 plus C.O.D, postage for send \$2 with cortex plus 110 Popularity and plus postuments. Surprise friends, relatives, Popularity and nur gaiore. SEND ND MONEY Just name and address to Ed Sais and pay postumen \$1.59 plus C.O.D, postage for send \$2 with cortex. and I pay postage.

BECOME AN EXPERT

LASALLE Extension University, 417 So. Dearborn St. A Correspondence Institution Dept. 10837 Chicago 5, III.

TUBE GIVEN WITH EVERY TIRE AT NO EXTRA COST Why Pay More! FALL SPECIALS—AT LOW PRICES SAVE TIME—SAVE MONEY—SEND THIS AD

GOOD USED TIRES—NOT RECAPS 19 YEARS AT THIS ADDRESS BE WISE—A TRIAL OF ONE TIRE WILL CONVINCE YOU.

| | EX | TRA | SPE | CIALS | -29 M | IONTH | WRI | TTEN | Gυ | ARAM | NTEE | |
|-------|-------|-------|-------|-------|-------|---------|-------|-------|-----|-------|--------|---------|
| 00-1 | 6 | \$4.7 | 15155 | 0-15 | \$4.9 | 51700- | 15(6) | \$9.8 | 51 | 700-2 | 20 | \$11.05 |
| 00-10 | 6 (6) | 5.7 | 5 64 | 0-15 | 4.9 | 51750- | 16(8) | 9.7 | 3 | 750-2 | 20 | 12.75 |
| 10-1 | B " | 5.7 | 5 67 | 0-15 | 5.1 | 5 700 | -17 | 10.5 | 18 | 750-2 | 20(10) | 16.15 |
| 50-1 | Š (6) | 6.4 | 15 71 | 0-15 | | 5 750 | | | | 825-2 | | 18.35 |
| 30-1 | 6 | 6.4 | 15 76 | 0-15 | 5.8 | 51750 | -15 | | | 900-2 | | 17.35 |
| 50-1 | Ď. | 6.5 | 5 80 | 00-15 | 6.5 | 5 8 25- | -15 | 16.0 | 180 | 1000 | -20 | 17.85 |
| 25-11 | R | 5.5 | 5 82 | 0-15 | 6.5 | 5 600 | -20 | 8.5 | 35 | 1100 | -20 | 20.55 |
| 10-1 | 7 | | 5 67 | | | 5 650- | | | | 1200 | | 23.75 |
| 50-1 | 5 | 5.0 | 5176 | 0-16 | 6.5 | 5 32×6 | 6(8) | | | 1000 | | 20.55 |
| 10-1 | 5 | 4.7 | 18 | | | 32x6 | B(10) | 10.5 | 3. | 1100 | -22 | 20.55 |
| | | | | | | | | | | | | |

Thousands of tires shipped all over U. S. A. All tires shipped F.O.B. Philis. Send Check or M.O. with this ad. Dept. S. STANDARD, 834 N. Broad St., Philadelphia 30, Pa.

"Last year's great literary find was Boswell's London Journal. This year's is Friedrich Nietzsche's My Sister and I. And of the two this second is certainly the greater." The San Francisco Argonaut

Suppressed for 50 Years

MY SISTER AND I

An Autobiography and a Way of Life

By FRIEDRICH NIETZSCHE

ELISABETH FOERSTER-NIETZSCHE — her anomalous desires drove her great brother to an asylum, and caused her husband's suicide.



"He goes back to his younger days when lust and pride ran strong in him. He grovels again in the unrepented orgies of his youth."

St. Louis Post-Dispatch

"He is most coherent in his descriptions, devoting the great majority of passages to sensational revelations of his strange life."

Wichita (Kansas) Eagle

"... a dark, tragic, terribly compelling glimpse into hell."

Long Beach (Calif.) Press-Telegram

"... an absorbing story of one of the greatest tragedies of modern times. Its style is sufficient evidence of its authenticity."

San Antonio Express

"...it opens the way for startling insight into the author's private life. The relationship with his sister Elisabeth is delineated with candid accuracy."

Greensboro (N.C.) News

My Sister and I is a book of revelations—the supreme adventure of our civilization focused on the lives of one man and two fascinating, reckless, beautiful women. The struggle of these women to establish domination over this man—one of the greatest of the world's philosophers—brings the whole maddening fabric of our world into glittering relief.

| CONTINENTAL BOOKS: Dept. PS 110 Lafayette St., New York 13, N. Y. Gentlemen: I enclose \$2.95 for my copy of the \$4 edition of MY SISTER AND I. I may return it for full credit if it does not fully meet my expectations. |
|---|
| NAME |
| ADDRESS |
| CITY |



NIGHTS AT HOME! L L.B. DEGREE

LaSalle's famous Law Library-used as reference in many Law libraries and Law officeshas enabled thousands to master Law sur-prisingly fast, in spare hours at home, for business and professional advancement.

These 14 remarkable volumes, compiled by leading professors and lawyers, cover the whole basic field of Law in condensed, orderly, sim-

plified manner.

You advance rapidly with this great library, plus special lectures furnished. We guide you step-by-step with personalized Problem Method of instruction . . . you learn by doing-handling legal problems—not by memorizing rules. Ging legal problems—not by memorizing rules. Send for two FREE 48-page booklets, "Law Training for Leadership," and "Evidence," answering questions about Law and its value

to you, and telling how LaSalle Law graduates are winning rapid advancement in business and public life. Mail coupon below. No obligation.

LA SALLE EXTENSION UNIVERSITY A Correspondence Institution

417 S. Dearborn St. Dept. 1083 L Chicago 5, 111. Send me your two FREE booklete described above. without obligation.

Name_____Age_____

City, Zone & State____



Lifetime beauty comes out of a gun! Colorcrete is a cementitious plastic, applied by pneumatic pressure to new or old concrete, stucco, etc. Tough, tenacious, enduring. Can be washed or scrubbed. Dirty, drab surfaces become sparkling white or tinted from a range of 30 colors.

"Building-Beautifying Your Big Opportunit

Colorcreting is a fascinating and profitable opportunity for men who want to build a substantial, long-term business. Colorcreting is exclusive. Rich in sales appeal to building owners. Income potentials are high; investment is low. We supply complete equipment, full netructions and liberal cooperation. Requires no previous experience or special ability. Write or wire for the Opportunity Book today. Be the first in your community.

COLORCRETE INDUSTRIES, INC. 572. Ottawa Ave., Holland, Mich.



ON THE SIDE OF THE LAW!

Help fight crime! . . . Earn steady good pay as a Finger Print Expert or Investigator. I.A.S. trains you—by easy, low-cost home study lessons. Learn this exciting work in spare time. Write for full details now!

OVER 800 POLICE BUREAUS...

Employ I.A.S.-trained men... proof of what I.A.S. can do. Write today (state age) for details. No obligation. No salesmen will call,

INSTITUTE OF APPLIED SCIENCE

Dept. 1367, 1920 Sunnyside Avenue Chicago 40, Illinois

20 LESSON COURSE SENT FOR NO-RESK Opportunity to START AT ONCE Opportunity to START AT ONCE THE POST OF T



owners who are wasting money, getting po-mileage due to over-rich mixtures, will pleased to learn how to save gasoline pleased to learn how to save gasoline by VACU-MATING OVER-RICH MIXTURES. VACU-MATING OVER-RICH MIXTURES.
VACU-MATING CLEAR, trucks and tractors,
Automatic and operates on the supercharge
principle, Easily installed in a few minutes.
SALESMEN WANTED! Big Profits

For FREE particulars, how you can install one on your own car for introducing, just send your name and address on a postcard to VAGU-MATIG, 7617-1945 W. State St., WAUWATOSA, WIS.



Nagging backache, loss of pep and energy, headaches and dizziness may be due to slowdown of kidney function. Doctors say good kidney function is very important to good health. When some everyday condition, such as stress and strain, causes this important function to slow down, many folks suffer nagging backache—feel miserable. Minor bladder irritations due to cold or wrong diet may cause getting up nights or frequent passages.

Don't neglect your kidneys if these conditions bother you.

Try Doan's Pille-a mild diuretic. Used successfully by milions for over 50 years. It's amazing how many times Doan's give happy relief from these discomforts—help the 15 miles of kidney tubes and filters flush out waste. Get Doan's Pillstoday!



CRESCENT SCHOOL Home Study Course!

Yes, a brilliant future awaits you in TELEVISION. My advice is to send for the details now about the CRESCENT course!



Gosh-I can actually earn while I learn with the practical CRESCENT SCHOOL course!



Learning in my spare time is so easy with these illustrated. simplified lessons!





I'm sure proud of my CRESCENT SCHOOL certificat .. now I can really start



Imagine-my own business, a home. a new car-and the CRESCENT SCHOOL course started it all!



Approved under the G.I. Bill. CRESCENT SCHOOL has trained thousands for BIG careers in the fast-growing TELEVISION industry.



CRESCENT SCHOOL

One of the largest schools of its kind"

to start on a profitable career in TELEVISION! Get your sample lesson

SEND COUPON TODAY

CRESCENT SCHOOL Dept. A-10 500 Pacific St., B'klyn 17, N. Y.

Sirs: Rush your FREE sample lesson and full details about the CRESCENT SCHOOL Home Study Course—at no obligation to me!

NAME

CITY.....ZONE....STATE..



OPPORTUNITIES EMPLOYMENT and PROMOTION

"Here I am at work making good money as a draftsman. I'm glad I sent the coupon to Chicago Tech for that Free Trial Lesson and found out how easy it is to learn Drafting in spare time at home. Today I feel secure in my Job because the draftsman's work comes first on any new project. And, in addition, draftsmen early the replaced with machines. What's more, I feel I'm slated for promotion and more pay, because I see so many draftsmen advancing to high-pay Jobs."

LEARN IN SPARE TIME—AT HOME!

(or at the College in Chicago)

A few hours of pleasant home study every week—that's all. No Interference with your present job. All the tools you need; drawing outfit included, With Chicago Tech's help, you train yourself step by step. This tested method—developed over 48 years of C.T.C. progress—prepares men quickly for good positions in industry.



Chicago 16, Illinois

FREE INFORMATION - SEND COUPON To prove to you how easy it is to learn Drafting at home by the Chicago Tech method, we will send you this PREE TRIAL LESSON. No charge for this lesson, now or later. Fill out and mail coupon, or send post card today.

CHICAGO TECHNICAL COLLEGE

| Mail tuniti | me F es ln | RE | RA | es | son | wl | th | in | fori | natio | on | abou | it | big | 0 | pp | c |
|-------------|---------------|-------|----|----|-----|---------|----|----|-------|-------|----|---------|----|-----|----|----|---|
| Name. | | • • • | | ٠. | | • • • • | | | • • • | | ٠. | • • • • | ٠. | Age | ٠. | | |
| Addres | s | | | | ••• | • • • | ٠. | ٠. | | | ٠. | | ٠. | | ٠. | ٠. | |
| City | | | | | | | | | z | one. | | State | ٠. | | | | |

N-220 Tech Bldg., 2000 So. Michigan Ave.

| MATTISON SILVER ROCKET 630 CHASSIS with - TUNEABLE BUILT-IN BOOSTER for better DX Reception (increases signal strength up to 10 times). Featuring NEW CASCORE TUNER mode for URIF interchangeoble tuning strips and NEW COSNEY OVER for edge to edge focus. MADE IN MATTISON'S OWN CABINET FACTORY 36 brenthracking cobinets that blend perfectly in any setting, traditional or modern. Write for FEE descriptive bready. |
|---|
| |
| DEALERS, SERVICE-DEALERS |
| Here is your apportunity to become the "important" TV dealer in your orea. FREEH Write for MAITISON MERCHANDISMS FORTFOLID. "Massembled Fair" and "\$1,300,000 Fleer Plan" When you buy from Martison you need only one source of supply. You can buy or Chossis. Cockiner or a complete TV Set |
| |
| FREE TO ALL! FULL LINE CATALOG Write for Catalog and name of nearest dealer |
| Mattison Television and Radio Corp. 8 9 3 B r o a d w a y Manufacture vin integrity N. Y. 3, N. Y. Oppt. PS-1 |



Get a Good Job-Run Your Own Business

Be the man who knows how to service and make quick repairs on washing machines, vacuum cleaners, heaters, toasters, stokers vacuum cieaners, heaters, toasters, stokers and household motors and gadgets of all kinds. Get into this pleasant, easy and good pay work. Get the sensational new book—Electric Appliance Repair and Servicing and ervicing.

Servicing.

An Investment of only \$3.00 will positively get you started in this vital field in a good-pay job or help you build up a profitable business of your own. Run it from your home. No starting capital needed. No experience in electricity required. The book explains how to diagnose and locate trouble and how to fit it, 362 Pages. 188 how-to-do-fit illustrations,

MONEY BACK IF NOT SATISFIED

Clip this ad and mail with only \$3.00 currency, check only \$3.00 currency, check or M. O. or we will send C.O.D. Use the book for 5 days. See how easily you can make it pay for itself hundreds of times over. Then if you are not fully satisfied—send it back and we will refund your money quick. Rush order today, Get started at once.

FREDERICK J. DRAKE & CO., Dept. 27, 117 Green Bay Read, Wilmette, III.

START A BUSINESS OR MAKE MONEY SPARE TIME

Easy to learn at home—in a few months! Easy to start a shop, or earn spare-time profits! Make money as you train. Complete tool set, all materials to build ottoman, included with illustrated lessons. Low terms. Write for valuable Low terms. W booklet today!

COMMERCIAL TRADES INSTITUTE
1400 Greenleaf Ave., Chicago 26, Ill. Dept. UJ-10



HAVE MORE FUN TRAVELING

HAVE MORE FUN TRAVELING
DINSMORE AUTO COMPASSES et a Contant
more of lindramition, interest and edite and
sengers love it! Saves time, worry. No back-track, no wrong
turns, dipickly installed. You'll enjoy every initiate of driving
jewied with micromatic compensator. If
your dealer cannot supply, order direct. Only
FREE Fidder on compasses for the heater,
FREE Fidder on compasses for the heater,
The compasses. When the compensator is the property of the compasses of the heater,
The compasses of the heate

DINSMORE INSTRUMENT 1804-39 Kelso St. Flint 1, Michigan

Only 10





Illustrated

landwriting quickly improves with our east moderated picture lessons Pat your spare!
"How to Become a Good Fanman," or ci volumes wanted below at \$1 each: Busil Writing Gard Writing Card Writing Wr

TAMBLYN SCHOOL of PENMANSHIP



リリ・ノフ BOOKLETS

Ptrated camic booklets just off the press. Good _clear illustrations. Send \$1 for 12 booklets and receive FREE two of the larger size 32 page books. Rush a buck for all 14 books to.

AL'S PRINT SHOP

W. JACKSON BLVD.

New Co-op Economy Club May Save Millions for Nation's Motorists....

OR FEES...ENJOY ALL CLUB BENEFITS

By Raymond J. Carpenter

LOS ANGELES, August 20 (GEC)—Less than 22 months ago a DOS ANCELES, August 20 (GEC)—Less than 22 months age a group of Los Angeles wholesalers started a new, cooperative Auto Economy Club. These businessmen believed that it would be mutually profitable to share their earnings with the car owners and householders of the nation. Now, in less than two years, the Gene Economy Club boats to a membership in excess of half a million and it is continuing to grow like wildfire. Car owners from every state in the union, from Canada and most U. S. territories are saving thousands of dollars by using club recommended economy methods and special club discount privileges on both automotive and household products.

Why the Economy Club **Was Formed**

The businessmen who founded the GE Ciub realized that if they could develop a following of loyal, cooperative club members they could: 1. Eliminate the middleman. 2. Do away with the middleman. 2. Do away with product advertising expense (in today's economy it costs more to sell a product than to manu-facture it). 3. Cut merchandise costs greatly greater volume. buying by

Why the GE Club Is

Sweeping the Nation Since thousands of dollars are saved through club cooper-ative buying and selling, this are saved through club cooper-ative buying and selling, this profit is shared with club mem-bers in the following ways: 1: Members can buy hundreds of outstanding automotive and bousehold products at discounts household products at discounts

household products at discounts ranging from 10% to 40%.

2. Members get a free fully year's subscription to the "Economy News," big club magazine. This magazine features:

A. Hundreds of pictures and descriptions of new, tested products for your car and home...

all at big club discounts B. Stories and technical in-ormation from leading national sources on such subjects as: "How To Increase The Re-Sale Volue Of Your Car"; "How To Get Up To 42 Miles Per Gollon From Any Cor"; "How To Beat The Auto Re-pair Racket"; "How To Drive 16,000

Miles Without Chonging Oil."

3. As a new club member you can start at once to enjoy spe-cial "Buy Without Money Priv-lieges." This plan allows mem-bers to get absolutely cost free their choice of hundreds of items listed in club catalogs.

Club Membership Is Open to All

The many benefits of this giant new cooperative club are giant new cooperative club are available to anyone who drives a car. Members are from every walk in life: housewives, busi-ness men, secretaries trades-men, etc. Ail have the same opportunity to share the auto opportunity to share the auto economy secrets developed through club research and money saving benefits made possible by club volume pur-chases.

Club Can Benefit

50 Million Motorists Club officials estimate that a five million club membership will be reached within the next 24 to 36 months and will con-tinue to expand and grow.

Buy Without Money Plan' **Amazes Club Members**

It's hard to believe, but it's true . . . any club member can buy any or all the hundreds of items shown in the club magazine and in ciub merchandise zine and in ciub merchandise catalogs without paying one red cent. This revolutionary merchandising plan gives all club members the opportunity assave hundreds of dollars if they wish by merely HELPING GET NEW, QUALIFIED CLUB MEMBERS. It's easy ... you don't buy or sell anything ... you just invite your friends to many benefits and share its many benefits. many benefits.



age of credit checks, certificates of oney saving coupons sent free to oll new member's.

A "Cost Free" Club

Though Club members can save many, many dollars through special club discounts. through special club discounts. they are required to pay no dues or fees of any kind. After making the club's registration deviation of the club benefits thereafter without ever paying one solitary cent. (The \$1 deposit will be refunded upon the return of the membership card and the new members surprise" package complete.)

Club Life Membership Card

Is Yours for the Asking
The official Gane Economy
Ciub membership card shown
here will be issued, registered in your name and sent to you postpaid in the big, valuable New Member's Surprise Package as soon as your registration deposit is received. WRITE TODAY!





This photograph shows just a few of the hundreds of outand accessories available to Economy Club members at big discounts.
Club's amazing "Buy Without Money Plan" enobles members to buy ony or all items in club catalogs without spending one cent.

How Club Members Save Money Through

Special Discount and Gift Offers

Special Discount and ours uries
All new Economy Citib members receive a big clib "Surprise
Pall new Economy Citib members receive a big clib "Surprise
The Company of the Company of the Company of the Company
Memorandum, FREE Gits Company FREE Continues FREE Money-SavingCoupons, FREE Tail and Premium offers.
FREE GAS COUPONS—This special Economy Club coupon may
FREE GAS COUPONS—This special Economy Club coupon may

used the same as cash in purchasing gas at your service station. Station owners then may use these coupons to buy merchandise from the club CLUB MEMBERS SAY:

wholesale department. FREE CREDIT CHECKS — Credit checks, Credit memorandums, money saving coupons and discount certificates ranging from \$1 to \$12 in value can be used

the same as cash in purchasing many outstanding automotive and household items. FREE TRIAL OFFERS—Club offi-cials have arranged for many household and automotive pronousehold and automotive pro-ducts to be sent (pay no deposit, pay postman nothing) to club members cost free so that they can "Try Before They Buy."

Memberships Issued

"On Approval" Only When your membership card and Club Surprise Package arrive, browse through its fascinating contents at your leisure. Read the "Economy News." the ciub magazine, and other interciub magazine, and other inter-esting materiai. Examine the vaiuable credit checks, money saving coupons and free triai certificates. Then, if you do not believe that the ciub offers you a great opportunity . . . give up

MR. J.K.H., NEW-ARK, NEW JERSEY, SAYS: "I think your discount club to the



MR. ALBERT R.E., FORT WORTH, TEX-AS, SAYS: "Don't hnow how you do
hnow how you do
it...your Economy
Club deal is the
best \$1 value I've
ever seen."



your membership by returning the complete package within 10 days AND YOUR REGISTRA-TION DEPOSIT WILL BE PROMPTLY RETURNED

| | OFFICIAL | CLUB | APPLICATION | FORM |
|-----|---------------|----------|-------------------|------|
| ANE | ECONOMY C | LUB, DE | PT. CP-10 | |
| 238 | Wilshire Blvd | L. Los A | naeles 48, Calif. | |

Gentlemen: Please send me my surprise package and club member-ship card entitling me to oil club discount privileges and benefits, I enclose \$1 (cosh, check, stamps, or money order) to cover the registration deposit.

I understand that, if not completely satisfied, I me pockage within ten days and my deposit will be re PLEASE PRINT PLAINLY

| NAME | | | _ |
|---------|------|-------|---|
| ADDRESS | | | _ |
| CITY | ZONE | STATE | _ |

LET ME PROVE I Can Make YOU

VE done it for thousands of other fellows. Let me prove I can add solid inches of hand-some, rippling muscles to YOUR arms, legs, ome, rippling muscles to YOUR arms, leps, soludiers, back . . . make you an outstanding spectmen of strength and self-trained of the self-trained

FREE—My 32 Page Illustrated Book is Yours—Not for \$1 or 10c—But FREE

32 pages packed with valuable advice, actual photographs of fellows who became new men photographs of fellows who became new men almost overnight . . . with "Dynamic Tension." Book can mean turning point Book can mean turning point of your life. It's yours— ABSOLUTELY FREE Send for lt TODAY, Address me personally: CHARLES me personally: CHARLES ATLAS, Dept. 1X, 115 East

5 INCHES OF NEW MUSCLE "My arms in-creased 11/2"; chest21/2";fore-

23rd St., N. Y.

Charles Aslas — winner of title "World's Mest

Perfectly Developed

CHARLES ATLAS, Dept. 1X 115 East 23rd St., New York 10, N. Y.

Send me-absolutely FREE-your famous book, "Everlasting Health and Strength" -32 pages, crammed with photos, answers to vital questions, valuable advice. I understand book is mine to keep, and sending for it does not obligate me in any way.

(Please print or write plainly)

& SCIENTIFIC MOTOR

Olesei Engir

- Auto Engine Rebuilding Bus & Truck

Be a Trained Diesel Man

Go places with Diffett I farms, factories and power plants trains, allips, tracks, bayes all use power plants trains, allips, tracks, bayes all use men! You can start your DIFFSEL training at home, in spare time, with tested, proved UE I home, in spare time, with tested, proved UE I home, in spare time, with tested, proved UE is home, in spare time, with tested, proved UE is engines under skilled instructors. You learn the operation, maintenance, servicing of all types of Diesel engines, PLUS Scientife Motor Tune-up.

ACT NOW! If you have mechanical ability, you'll like Diesell High School diploma not necessary. Write now for FREE book. "EARNING POWER IN DIESEL." Act Today FOR FREE BOOK!

UTILITIES ENGINEERING INSTITUTE, Dept. DM-16, 2521 Sheffield Ave., Chicago 14, III. (Found O. K.) Rush, without obligation, FREE Book on DIESEL.

NAME

ZONE STATE

Check here for information if under 17.

EVERYTHING IN

For Beginners - For Prolessionals For Advanced Hobbuists

America's Most Complete Stock of Kits, Leathers, Tools, Supplies It will pay you to get acquainted now with LARSON Leathercraft. Easy-to-Assemble kits for beginners require no tools or experience to make belts, billfolds, purses, gloves, woolskin animals, etc. Complete stock of moderate-priced tooling leathers, top-quality calfskins, tools, supplies for advanced hobbyists and leatherworkers. Send 10c TODAY for big illustrated catalog. L. C. LARSON CO., 820 So. Tripp Ave. Dept. 2026.

COMPLETELY ASSEMBLED READY FOR IMMEDIATE USE **60 POWER TELESCOPE** \$3.95

VARIABLE EYEPIECE 20 x 40 x 60-BRASS BOUND NEW! Three telescopes in one. 3 different rea-bright magnifications. 20 power for uitra-bright mages with 40 and 60 power for uitra-bright mages with 40 and 60 power for uitra-bright mages with 40 and 60 power for uitra-bright mages with 50 power for uitra-bright magnification with the specific power for unitra-bright magnifications. 20 power for uitra-bright magnifications, 20 power for uit

ble appring the property of th

Dept. PSB5

Hartford 3, Conn.

\$5000.90 V) 1st & 2nd PRIZES

COMPLETE S130 ART COURSE

OMPREIE 3130 ART COURSE

80 OTHER VALUABLE PRIZES

Your Drawing Judged and Answered. Take this
have profitable Art takent, too may gain a lifetime of happiness, and hist estimates if you mail you drawing today,
time of happiness, and hist estimates if you mail you drawing today,
to 6° high. In gon or pencil. Multi to us, None returned. Winners notered in. Coatest for month, in which we receive it. Send your drawings now with your mans, address, are and occupation. Diet or drawings now with your mans, address, are and occupation. Diet or draw-

WALLER ART EXCHANGE Studio 158, 1000 N. Charles MASTER COURSE IN SECRETS REVEALED!

SECRETS REVEALED:

Actual methods, techniques of hyportic, autilable subjects of hyportic, autilable subjects of hyportic, autilable subjects affects of hyportic, autilable subjects affects from the hyportic and hyportic and hyportic affects of hyportic and hyporti

Complata \$2

ciuded. Order "Hypnotism Course" today!
POWER PUBLISHERS, Dept. PS-13, 790 Broad St.

TURE-EASER Reg. in U. S. Pat. Off. (A Piper Brace





NO FITTING REQUIRED

A strong, form-fitting washubs upport. Back lacing adjustable.

Snaps up in front, Adjustable leg strap, Soft, flat groin pad, Xo
operation support, For men, women and children, Mail orders give
measure around the lowest part of the addomen, Specify right or left
side or double. We Frenay Fordage Except or C.D.*s.

PIFER SRACE CO.

11 Wyandorte, Dept. P5-102

Kunsas City 6, Mo.

ADDRESS

Become an ELECTRICAL or MECHANICAL ENGINEER IN 36 MONTHS

* Bachelor of Science Degree

* Engineering Associate Certificate, 12-18 Months

* Service Preparatory Courses, 3-12 Months

The growing shortage of trained engineers and technicians offers greater opportunity for ambitious young men. By 1955 there will be at least two positions for every graduate. Enroll NOW and earn your B. S. Degree in 36 months. Each of three levels of study is complete in itself. Technician courses can also be applied as one-third of the degree program. Faculty of specialists, Military, practical or academic training evaluated for advanced credit. Terms open JANUARY, APRIL, JULY. OCTOBER.

CHOOSE FROM THESE 15 PROGRAMS

· General Preparatory Course - 3 Months SERVICE LEVEL — 6 to 12 Months
Electrical Service • Refrigerator Serv
Welding Operator • Heating Service
• Radio-Television Servicing Course

Milwaukee School of Engineering Dept. PS-1052, 1025 N. Milwaukee Milwaukee 1, Wisconsin

Hadio-Television Servicing Course
TECHNICIAN LEVEL — 12 to 18 Months
Badio and Television
 Bedio and Television
 Bedio and Television
 Welding
 Welding
 Holine Fain Level — 36 Months — 8. S. Degree
Choice of nuncional decitives. Production Sales or ReTRONICS OR POWER MAJORS. MECHANICAL
EXONINEERING

OF ENGINEERING MILWAUKEE SCHOOL

NONPROFIT . FOUNDED IN 1903



Without obligation, send catalog and information on....(Name of Course) Name......Age..... City.....Zone.....State.

If veteran, indicate date of discharge

MODEL SHIPS AND tapsitness COMET METAL PRODUCTS CO., INC.

RN MEAT CUTTIN AT NATIONAL



The steady dependable trade of Meat Cutting taught easily in 8 short weeks. You LEARN BY DOING under actual meat market conditions in big modern school at Toledo.

For beginners or men with experience. Get a profitable store of your own. Remember, PEOPLE MUST EAT! Big pay jobs. Free employment help. Thousands of successful graduates.

Buying, cutting, percentage, pricing, advertising, selling, etc. A complete retail meat education. National School established over 25 years. Get National training NOW, Pay your tuition in easy weekly payments after you graduate. Get all the facts. Send coupon for

| TIES OF PARE SERVICE CONTRACTOR | . G.I. ILPPIOTEG |
|--|---|
| National School of Meat Cutting, Inc. Dept. 51-K, Toledo 4, Ohio | (G.1. Approved) |
| Send me your FREE school catalog on Nationsi in Meat Cutting, Meat Merchandising and Self obligation, No salesmen will call. | Training at Toledo Service Meata. No |
| Name | Age |
| Address | |
| CityState | |



Only WSA Offers You This

Triai plan proves you can learn at home in spare time. We teach you from the beginning step-by-step. Many students begin to earn extra money even before they finish the course. Quality for well paying positions in this interesting field.

Two complete art outfits included, You get the first one when you enroll—with all the material you need to start. Don't delay. Take your first step new toward drawing for money and pleasure.

MAIL COUPON FOR FREE BOOK

WASHINGTON SCHOOL OF ART Studio 1310F, Washington 5, D. C. Send Free Book, "Art for Pleasure & Profit." No salesmen. (Please Print)

aı

| NameAge | |
|--|--|
| Street | |
| CltyZoneState | |
| Course G.I. Approved for Eligible Vets | |

NEW PARKING GUIDE

. MAKES PARKING EASY \$1.98 ...

By giving you a guide over a front headlight so you will know the front end clearance of your car . . a great safety aid when backing into a parking place!

 DRESSES UP YOUR CAR BEAUTIFUL LUCITE ROD Giows at night CHROME PLATED BASE For justing beauty

. EASY TO INSTALL

Aii you need is a screwdriver. No wires to connect. It picks up light from the headlight.

MONEY BACK GUARANTEE

If returned in 10 days, Order one or two today! Send no money, pay the postman or enclose cash, check or money order and we pay the postage anywhere in the U.S. Fiorida orders add 3% sales tax.



7

ON A HEADLIGHT

KEHOE MFG. CO. **DEPT. 101** FT. MYERS, FLA.

BOYS-IT'S FREE

... NEW, EXCITING 16-PAGE BOOK on magic and marvels of chemistry Shows you how to amaze friends with eye-opening tricks of chemical magic . . . like

changing water to blood and blood to stone. Tells you how blood to stone. Tells you how to do many fascinating home experiments and shows you the big, new Chemcraft outfits. Describes fun, thrills, adven-ture you can have with a Chemcraft chemistry outfit of your own. Send now for free copy to Porter Chemical Co., 51 Prospect Ave., Hagerstown, Md.



HEY FELLAS (HEMCRAFT ask Dad for

\$2.95 EACH OR 2 FOR \$5.00!

Upright Telephone complete with cord in Tested and Guaranteed condition, For Inter-comm, or extension, Complete List of telephone parts, switchboards, hondsets, magneto and dial telephones, etc. Write for list.

TELEPHONE ENGINEERING CO. DEPT. 1. MAIN BLVD. SIMPSON, PA.

HOTTER GAS TORCH

SELF CONTAINED - NO COMPRESSED AIR Burns natural house gas or Hq. petroleum
2100° F.-1500 BTU for soldering, is
grant for the soldering of the

DEPT. OF M.U. RELLER ON MONROVIA, CALIF. **ELECTRIC MOTOR BARGAINS!** 2 HP 3450 RPM 1975 12 HP 3450 4750

2 HP 3450 6500 3 HP 3450 7750 All Every Motor Fully Guaranteed

FOR Heavy Duty, Repulsion Induction and Group to Types. 110-220 Voits, 60-cycle. Si

terry whose. Standard Makes G. E., Wagner

Immediate Delivery for 1798s. 110-220 Volts, 60-cycle. Single-land, Westinghouse, etc.). Rush your order TODAY—large stock of motors—1 & 3 phase. 32-v. direct current bargains. Prices f.o.b. ROBERTS ELECTRIC (O., 849 W. Grand, Dept. 35, Chicago, Ill.). diate Delivery phase. Si Westinghouse, etc.).



12 Months Driving for \$4.95

A new tire guarantee with each used tire. Pasitivaly Not Re-Caps—Every Tire Machine Inspected 600-16 \$4.95 Two for \$9.50 650-16 \$5.50 670-15 \$5.95 700-15 \$5.95 Send this ad with order. Mail orders rushed on re-

West Park Tire Sales, 14018 Beech Ave., Cleveland, O.

CALIFORNIA LAND!

The surge of population westward gove California 50% population increase in the past 10 years. This makes land values soar. We search out land you may acquire with small steady payments; os little os \$50 down. Many say: "Better than money in the bonk!" Our free pamphlet may be your future fortune. Write for It todayl

Farm and Ranch Service Co.

7075 Hallywood Blvd.

Los Angeles 28, Calif.

DO IT TODAY! SWITCH TO



"Look! Another man switched to Kentucky Clubthe thoroughbred of pipe tobaccos."

MILD KENTUCKY CLUB

Notice how much better your pipe

tastes-how much fresher your mouth feels when you switch to Kentucky Club. Look for the blue tin with the picture of the red-coated rider. Send for free catalog showing fine pipes and how to get them at big savings. Mail Pouch Tobacco Co., Wheeling, West Va. Dept. 101



AMAZING NEW TRAINING PLAN

PREPARE YOU AT HOME FOR BIG PAY JOBS IN

RADIO **ELECTRONICS**

MAIL

COUPON

TODAY

EXTRA FEATURES THAT MEAN MORE MONEY FOR YOU!

MONEY FOR YOU!

Outside of new job opercrimities will be
justing to be opercrimited and in
publication of government restrictions on new
restorm. As Justiness, successful methods
are restormed to the publication of the
restormed of the publication of the
restormed of the publication of the
second of the
seco

FCC COACHING COURSE to every student at NO EXTRA COST ofter

EARN EXTRA MONEY IN SPARE TIME Make as mother in JPAKE IIME Make as mother as 985.00 a week in your spare time while learning — repairing Radio-TV sets. Many of my students pay for their entire training from spare time earnings almost from the very beginning... atart their own service business.

FREE JOB PLACEMENT SERVICE

RADIO - TELEVISION TRAINING ASSOCIATION 1629 Broadway, Radio City Station, New York 19, N.Y.

Approved as a Correspondence School under the laws of the State of New York

AT NO EXTRA COST! YOU GET A ROUND TRIP TO NEW YORK CITY

PROPERTY IN THE USE OF CAMADA—LEEV YOUR WAY TO NEW YOrk and returnington and heavy to New York and returnington and show you way to New York and returnington and show the control of the

Advanced FM-TV Training For Men Who Know Radio

Prepares You For Migher Pay Jobe In A Few Menths COMPLETE theory and practical tra-ing course . . . complete with a including large screen TV receive FCC License Coaching Course Included FREE.

. 1

BOTH FREE! Send for my illustrated booklet and trial lesson

Mr. Leonard C. Lane. President RADIO-TELEVISION TRAINING ASSOCIATION 1629 Broadway, New York 19, N. Y.. Dept. P-10 Dear Mr. Lane: Meli me your NEW FREE SAMPLE LESSON thet will show me how I BIG MONEY in TELEVISION. I understand man will call.

ADDRESS. ZONE CITY_ STATE

am interested In: Radio-TV Advanced TV-F ETERANSI If qualified under G.I. Bill, check here



YOU BUILD AND KEEP BIG

SCREEN TV RECEIVER

PLUS . . . All 11 lustrated 'units. including Sup Het Redio



BUSIN

Don't work for "small wages." Get in on the Big Money by learning Elecrical Appliance Repairing NOW in your spare time. Learn it the simple, easy way by working with your hands building, testyour hands building, test-ing, checking. We supply you with valuable Kits that will give you that all-important "know how."

More men are needed immediately. Millions of refrigerators, motors, washing machines, irons, vacuum cleaners, house wiring need fixing. This demand must be met! Rush name today for FREE

ILLUSTRATED BOOK and special form for paying us later from cash earnings!

CHRISTY TRADE SCHOOL 4432 N. Kedzie Ave. Dept. D-2001 Chicago 34



There is blg money to be made cicaning Venetian Blinds and a permanent, fast growing, Lifetime Business, besides, An amazing new kind of business of your own in a field that is growing like mad. Mil-lions of Venetian Blinds need

lions of Venetian Illinds need with our new patented machine, incorporate a regular intervals. Basement, garage or utility room to begin with. You can expand as your business increases by leaps and bounds. Income up to \$200,000 daily aiready being made by others. Small investment for equipment garast your own fillerime business—and monthly payment plan permits you to pay for it as you grow.

FREE Get all the facts about this sensational new hind control to the control to

VENETIAN BLIND LAUNDRY EQUIPMENT CO. INC. 442 N. SENECA ST. DEPT. 1210 WICHITA 12, KANSAS



FREE . . . reg. \$2.95 chrome SEWLITE given with every kit. 10 DAY FREE TRIAL-ORDER NOW!

Send no money, pay COD or send money order and we'll pay postage. Please state whether wheel on your machine turns toward you or away from you. Shipping wt. 6 lbs. SENIOR SEWING MACHINE CO.

197 Clifton Place Dept. PS-40 Bklyn, N. Y.

EASY TO LEARN CODE

Learn or lacrease speed with an Instructorrah-title liastic-Televrant Code Teacher that takes anyone to master code without further assist-ance to the control of the control of the anyone to master code without further assist-ance. The control of the control of the range 3 to 40 PTM. Always ready- no GRM, range 3 to 40 PTM. Always ready- no GRM, Instructorrant System, Write today for conven-ient rental and purchase rinas.

INSTRUCTOGRAPH COMPANY 4701-P Sheridan Road, Chicago 40, Illinois



Do You Make These Mistakes n English? MANY persons say "between you and X" "use "who" for "whom "-don't know """ or """ or """ or """ or """ """ or ""; "" or ""; "" kery time you spead of effective English brings you shdeded sadvantages, better op in English?

mand of effective English brings you sadded savantages, better o You can improve your English through Sherwin Cody's 100% set Correcting invention. If you are ever embarrassed by mistakes grammar, spelling, punctuation, or pronunciation, write for Fit onligation. SHERWIN CODY COURSE IN EMGLISH, 1810 B & O Bids Rochester 14, N. Y.

STUDY TO BE A DOCTOR of Psychology or Metaphysics

Obtain a Ps.D., Ms.D., or Ph.D. degree. Be a Teacher, Lecturer or Accredited Practitioner, Teach others how to achieve Health, Happiness and Contentment. Chartered by State, Write for FREE book telling how.

THE NEOTARIAN COLLEGE OF PHILOSOPHY

Desk 5, Pickwick Building Kansas City 6, Missouri

SAVE 50% & MORE!

Buy diamonds and diamond jewelry half-priced from Kaskel's, America's foremost Pawnbroker, Every diamond is re-set in a luxurious new mounting ... graded according to nationally accepted standard...and bonded to this effect. For

over 70 years, we've served over 1,000,000 satisfied customers from all 48 States. 10 DAY UNCONDITIONAL MONEY-BACK GUARANTEE References: Your bank, or any Rating Agency

KASKEL'S, 9 Columbus Ave., N.Y. 23, Dept. K8



44 POPULAR SCIENCE

STAMPEX C

EXERCIAL STREET STREET, STREET

This Sensational Collection of Unusual Postage Stamps includes: S24 DIFFERENT GENUINE

20 20 Bargain of the Year!

Cotham Hobby Corp. Dept. S. 107 E. 126th St. 1865. 24. The state of the stat

REAL DIESEL ENGINE

2048 NO POSTAL CORS TO ALL TIPFERENT & POSTAL TO MIN THESE SMALL LILUSTRATES CAR SAY FELLOWS, BE THE OF THE PAR-CARTOON BOOKLETS!

THARTEU111

LEGAL FORMS CO., DEPT. P.S., WILLOUGHBY, O.

Legal in any state of children was a may state of children wo. 2—Hi to children wo. 4—Portions to husband and children wo. 5—Hi to children wo. 4—Portions to write and children wo. 5—Hi to children

Forms composed by reputable attorney. You need only fill in a few spaces and have witnessed.

WYKE KONK MITT NOM \$5.00

63rd St., Chicago 37, III. Dept. FUR SALES, 1031 1) or C.O.D. plus postage MADE OF HEAVY
 PLATE STEEL
 UNIVERSAL—FITS
 ALL EXHAUSTS

Installed, MOREY RACK GUARANTEE MONITOR CONTROL SHALL SHALL

TUO-TUD TRUAHX3 TH NEMI EXCILINGI

SHARPENER

Please send me free Information on B. 5. Engineering 'egree in 27 months as checked.

Aeronautical, Chemical, Civil, Electrical, Mechanical, Radio-Television.

6102 E, Washington Boulevard Fort Wayne 2, Indiana

TECHNICAL ANAIGNI COLLEGE SEND COUPON TODAY --

Gov't approved for G.L.'s. Engineering preparatory courses. Students from 48 states and 21 foreign countries. Enter December, March, June, September, Send coupon for free catalog and full information, Enroll now.

Low tuition. Competent instruction. Thorough, intense, prac-tical program, Modern, well-equipped inhoratories including new physics inhoratory and modern wind tunnel, individualized instruction emphasized,

blundeds of young men are earning B.5, ENGINEERING DE-CREES annually in this recognized institution—year around op-cration. New terms start quarterly, Many students cama a major part of their college expenses in this large industrial center.

AERONAUTICAL, CHEMICAL, CIVIL, ELECTRICAL, MECHAN-ICAL and RADIO ENGINEERING (inc. TV and Electronics).

Big Demand for Graduates

SHINOM 12 DECKEE IN

31A12 3NOX 1953 Catalog **WIDWEST** 3381 101 COUPON 909 Broadway, Cincinnati Z, Ohio Dept. 258, MIDWEST RADIO & TELEVISION CORP. SEND THIS

Buy DIRECT from the MIDWEST Factory and SAVE!

on 30 Days Trial. 20-Inch Television at low Factory Prices, and installation in your own cabinet. Mammoth beautiful consoles and complete chassis for easy Midwest offers a sensational new 1953 line of



ou these powerful NEW 1953

ad Moz







Millionaire Mail Order



Pleasant Hill, Ohlo

The L. W. SURVEY Dopt. 310 Chicago 26, III. ness that's all yours. Rush name today. A postcard will dosecrets of getting orders and money in your daily mail, in a busi-

SEND

Make money, Know how to break and first hook for title for the food of the following and first first for the following the saddle are inferenced in Califling and kiding the saddle are inferenced in Califling the saddle are inferenced in Califling the saddle are inferenced in the first fi

BEEKA SCHOOF OL HOBSEWYNZHIL

SEND \$1.00 deposit and pay postman \$3.99 plus postage charges or send \$4.99 for postage charges and it from:
COMPRNY, Dept. WPS-10 Kearney, Nebraska

"Or TOTAL TOTAL CONTROL TO THE CONTR

FOR THIS

WALKIE TALKIES \$4.99 Set of 2

slong with details showing how you can quickly master the reprint from Mechania Illustrated will be sent absolutely free, case!) have mushroomed into prolits of thousands. This incredible small investments (\$16.80 in one 3334 and more every year! Learn how their homes-many making \$20,000

mori sesseniaud rebrO liaM gninnur Read the inside facts about hun-dreds of 'little fellows' who are

FREE GUIDE "How to Solect Binoculars BUSHNELL Binoculars

56 7 s

26 At Sino won,

Posodena 1, Calif.

Bushnell Bldg., Dept. P50 Dealer Inquiries Invited

"How to Select Binoculors Free! Catalog & Book sather Case Inclid.

Eosy Pay Plan

Money Back Guarantee reginedipal Finest Precision Optics BINOCULARS

High Power

JAIAT 3387 YAO OE 📺

"The "Annual London Control Cappellic, Cappellic, Cappellic, Empellic, Empel

Now Made Easy! Prectical up-toteaches you how to pick locks, de-course
make master keys, repair, lastall, servlec, etc. New self-instruction lesson follec, etc. New self-instruction lesson folmaster way.

Locksmithing MAKING

OCTOBER

AT BETTER DEALERS . . . COAST TO COAST

"How to Become a Mail Order lillionaire

Read the inside facts about hun dreds of "little fellows" who are running Mail Order businesses from their homes-many making \$20,000 and more every year! Learn how small investments (\$16.80 in one case!) have mushroomed into prof-



its of thousands. This incredible POSICALD TODAY reprint from Mechaniz Illustrated will be sent absolutely free along with details showing how you can quickly master the secrets of getting orders and money in your daily mail, in a business that's all yours. Rush name today. A postcard will do.

The L. W. SURVEY 7070 North Clark Street,



train horses. Wrue today for this FREE, together with special of ourse in Animal Breeding.

Pleasant Hill, Ohio

WALKIE TALKIES \$4.99 Set of 2

ELECTRONIC VOICE POWERED

deposit and pay postman \$3.99 postage charges or send \$4.99 livery. Sold only by mail from: SEND \$1.00 LIDWAY COMPANY



Locksmithing AND KEY Now Made Easy! Practical up-to-

It shop, hardware denier, guomilih. Se easy illustrated tessons. Full price only \$4.95, postsons. Full price only \$



30 DAY FREE TRIAL **High Power** BINOCULARS Finest Precision Optics Featherlight

Money Back Guarantee Easy Pay Plan Leather Case Inclid. Free! Cotolog & Book "How to Select Binoculars" Dealer Inquiries Invited Bushnell Bldg., Dept. P50 Pasadeno 1, Colif.

SHNELL Binneyland

| FREE | GUIDE | How | to | Select | Sinocular | |
|------|-------|-----|----|--------|-----------|-------|
| AE | | | _ | | | CITY_ |

STATE

DON'T LET ADDED QUARTS BREAK YOUR BANKROLL...



Excessive oil consumption can make driving needlessly expensive. Now is the time to change to Pennzoil and get quality motor oil that lasts longer. Pennzoil is specially refined from 100% Pennsylvania crude, the best and most stable known, with THE Tough-Film'

that safeguards your engine from sludge. varnish and carbon. By keeping pistons.

rings and valves clean and smoothrunning, you use less oil with Pennzoil no matter how hard or fast you drive! Change over now ... OUND YOU

at this sign..

GIVES ALL ENGINES AN EXTRA MARGIN OF SAFETY Member Penn, Crade Crude Oil Assn., Permit No. 2

PENNZOIL® MOTOR OIL AND LUBRICANTS AT BETTER DEALERS . . . COAST TO COAST



Midwest offers a sensational new 1953 line of beautiful consoles and complete chassis for easy installation in your own cabinet. Mammoth 20-Inch Television at low Factory Prices, and on 30 Days Trial.

Buy DIRECT from the MIDWEST Factory and SAVE!

MIDWEST RADIO & TELEVISION CORP. SEND THIS 909 Broodway, Cincinnati 2, Ohio COUPON Dept. 25B, For FREE MAME MIDWEST ADDRESS 1953 Catalog

CITY_____ ZONE___STATE____

DEGREE IN 27 MONTHS

Big Demand for Graduates

AERONAUTICAL, CHEMICAL, CIVIL, ELECTRICAL, MECHAN-ICAL and RADIO ENGINEERING (inc. TV and Electronics). Hundreds of young men are estning B.S. ENGINEERING DE-GREES annually in this recognized institution—year around op-eration. New terms start quarterly, Many atudents earn a major part of their college expenses in this j

Low tuition. Competent instruction. Thorough, intense, prac-tical program. Modern, weil-equipped laboratories including new physics laboratory and modern wind tunnel. Individualized instruction emphasized.

Gov't approved for G.I.'s. Engineering preparatory courses. Students from 48 states and 21 foreign countries. Enter De-cember, March, June, September, Send coupon for free catalog and full information. Enroll now.

--- SEND COUPON TODAY --INDIANA TECHNICAL COLLEGE

6102 E, Washington Baulevard

Fort Wayne 2, Indiana Please send me free information on B. S. Engineering degree in 27 months as checked.

| | Chemical, Civil, | |
|---------------------|----------------------------|--|
| ☐ Electrical, ☐ Med | nanical, Radio-Television, | |

| Address | | |
|---------|------|------|
| L | | |

MODERN LAWN MOWER SHARPENER

Service departments leading Lawn Mower manu-

Mover manu-facturer us Lawn Mover Sharpener. One lever move have move-tion. Gasoline and oil tion. Gasoline and oil remain in enjets white line of wheels, roller on handle. The book mile grinder-no extra grinder to buy. Imitated by these contractions of the contraction of the prinder-no extra grinder to buy. Imitated of these equided—compare before you buy

If it isn't a Modern it can't be Modern (Prices subject to change without notice)

MODERN MFG. CO. 160 N. Fair Oaks - Pasadena 1, Calif.

\$263.00



NEW! EXCITING! JET EXHAUST CUT-OUT

- Now your car can sound off those ex-citing, dynamic tonea-easily con-trolled mechanically from your dash-board. Channel your exhaust through special pipes or muffer without re-moving your original muffer. Easily installed, MONEY BACK GUARANTEE
- FITS ALL EXHAUSTS Send \$5.95 rheck, cash, money order (postpaid) or C.O.D. plus postage to: FUR SALES, 1031 E. 63rd St., Chicago 37, Ili, Dept. PS

MAKE YOUR WILL NOW \$2.00

orms composed by reputable attorney. You need only fill n a few spaces and heve witnessed.

Legal in any state, money refunded if not satisfied, No C.O.D. orders, Order by form number only. No. 1-All to husband, No. 2-All to wife. No. 3-Portions to wife and children. No. 4-Portions to husband and children, No. 5-(Spouse Dead) Portions to children.

LEGAL FORMS CO., DEPT. P.S., WILLOUGHBY, O.



ILLUSTRATED

CARTOON BOOKLETS! SAY FELLOWS! BE THE LIFE OF THE PAR-TY WITH THESE SMALL ILLUSTRATED CAR TOON BOOKLETS OF COMIC CHARACTERS!

10. ALL DIFFERENT, \$1 POSTAID

SORRY NO POSTAL C.O.D.S.

REGINALD SALES 210 L Fifth Ave., New York, N. Y.



REAL DIESEL ENGINE \$2.95 * for planes, boats, midget cars . 7500 RPM: 1/7 HP; ht. 31/2";

wt. 5 oz.

e precision machined for smooth operation
you just can't beat this price for a precision diesel engine! Streamlined, compact,
easy to install. Thousands of satisfied users
all over the world. Faat delivery if you
ORDER TODAY! Send 82-95 plus 25c post-

Gotham Hobby Corp. Dept. S. 107 E. 126th St.

with the Children

Bargain of the Year!

524 DIFFERENT GENUINE STAMPS 50c

This Sensational Collection of Unusual Postage Stamps Includes: Hungarian Triangle Bird Set: Hinduschin Triungie Bird Set; Spain's Goya Nude Duch-ess; Albania Roosevelt-Chrurchill Issue complete; Da Vin-cl's Mona Lisa in Original Colors; South Molucca' a (a new mation) 3 gorgeous sets; MacArthur Issue, U.P.U. Issue, moret To introduce our bargain approvais 524 ALL DIF-PERENT stamps cataloging over \$11.00 for only 50et

STAMPEX CO., 116-HP Nassau St., NYC

MEN! send for this MONEY-MAKE \$1500 IN

Do you want to make more more than the more more more than the more more than the more more than 150 fine flower than the more than 150 fine quality fabrics, sensational value in mode-to-measure suits and workers. No experience needed. You'll say it's the greatest way to make more you ever saw.

PERSONAL SUITS TO WEAR Pay No Money! Send No Money!

Our plan makes it easy for you to get your own personal suits and overcoats without paying it, in addition to your big cash earnings. This offer is limited. Rush your name and address for big FREE OUTFIT—today!

W. Z. GIBSON, INC., Dept. M-520 500 S. Throop Street, Chicago 7, Illinois

TASOPE PHOTO-ENGRAVING PLANTS



Establish your own profitable PHOTO-EN-GRAVING business. Make cuts for newspapers. printers, and advertisers. Make etched name plates, plaques etc. Instructions furnished, no experience necessary. Sold direct from factory since 1931. First five hundred cuts sold locally or by mail will pay for plant and pay you well for your time. Write for FREE catalog.

TASOPÉ DEPT. PS-10, AURORA, MO.

—and re-cast junk batteries into new, with and without new materials; the latest achievement. We supply complete instructions and everything needed. Large dally profits.

BATTERY LABORATORY SCHOOL

DEPT. PSM, MINNEAPOLIS 4. MINNESOTA



Many Finish in 2 Years


No classes. No time wasted going to and from school. Progress as fast as your time and abilities permit. Standard H. S. texts supplied. Thousands enroll each year in this 55-year-old school. Send for FREE descriptive booklet.

AMERICAN SCHOOL, Dept. H746 Drexel at 58th St., Chicago 37, III.

Without obligation, please send FREE descriptive

Name

Address.....

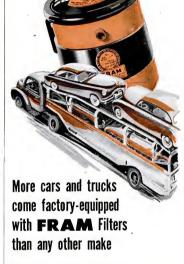

Today more than 15 million engines are being protected by Fram Filters! What better proof can there be that Fram filters best by actual test? Fram gets your oil cleaner, cleans it faster, keeps it clean longer . . . to keep your engine running . better, longer, cheaper! Always insist on Fram when you have your cartridge changed. And, if your car isn't equipped with a filter, better have a Fram Oil & Motor Cleaner installed ... to save your engine's life!



FRAM CORPORATION

Providence 16, R. I.

O L D S M O B I L E'S

"ROCKET" ENGINE



Olds engineers wisely protect every working part of the Rocket engine with an AC Oil Filter and Aluvac Element. Here's why—

- 1 ALUVAC keeps oil clean . . . removes particles as small as 1/100,000 of an inch
- 2 ALUVAC has greater filtering area . . . it's ten times greater than ordinary elements
- 3 ALUVAC has no harmful chemicals won't destroy detergents in heavy-duty oils
- 4 ALUVAC is dependable . . . resists harmful acids, gasoline, water

There's an AC Aluvac Element made to fit the oil filter on most every car!



GENERAL MOTORS CORPORATION

\$5 per hour

Clean and Methproof rugs and upholstery "in the home" or public buildings. If now employed, you can oppose the property of the

DURACLEAN cleans by absorption! No scrubbing, soaking or shrinkage, Dirt and grease vanish , matted pile rises , colors revive. Furnishings used again same day,

DURAPROOF resists moths and carpet beetles. our service backed by a National Money Back Year Warranty.

We furnish enough material to return your total investment in War-proof Business, EASY TERMS, Send for FREE booklet TODAY.

DURACLEAN CO. 2-180 Duraclean Bldg, De Deerfield, III.



oostpaid

Conquer Space, Explore the Universe, Planets, Moon etc. Complete Lens Kit consists of 80 inch foral length of the Constant of the Cons Money back guarantee.
RUSSE SALES CO., Hartford, Conn., Dept. PS-7



Exectiontly master-crafted nickel piated brass, A 13-p compass, dividers. You save more the regularity \$20.00!

KERS PARADISE • 163 GREENWICH ST.,

IMAKE TO \$40 EVERY DAY

That's what you'll be saying when you line up with our company and the way with our company and the saying when you line up with our company and the saying which was firms, merchants, etc. No selling, demonstrating or 100AT—if you are lettern 8 and 8, lothing and women wated UNITED FINANCIAL SERVICE OF AMERICA 249 PLYMOUTH BLOG.

S FREE COURSE! BIG PROFITS! S — Flocks & Sandblasts

Dual Purpose Spray Gun! Uses only 25 lbs. Air Pras Thousands of uses in Home. Shop, industry the control of the contr



UNITED WHEEL STAMPING CO. 12131 S. PEORIA STREET

PAINT STRIPING TOOL



WENDELL MFG. CO. 4234 N. Lincoln Avenue pt. 2-S, Chicago 18, Illinois Paints Curved, Circular or Straight Lines

Fountain A Visible Supply DEALERS

Paint Striping Tool

Thumb and Finger Rests. Easy to Guide Tool Guide Keeps Lines Straight **Knurled Wheel Distributes Paint**

SEND FOR GIANT 1952 BOOK ON **ELECTRIC TRAINS**

Huge, 48-page catalog filled with full-color pictures of American Flyer Trains and accessories. Authentic of American Flyer Trains and accessories. Authentic scale models, superbly detailed, with 2-rail track, snoke and "choo-choo." Wide variety of remote-con-trol, action-packed equipment. Send 10c to Gilbert Hall of Science, 345 Erector Square, New Haven, Conn.



120 PAGES ... Craft Supplies, Tools, Designs, Instruction Books from America's Largest, Most Complete Handcraft Stock Send for your free copy NOW!

GRIFFIN CRAFT SUPPLIES 5626-B Telegraph Ave. . Oakland 9, Calif.

EASY TO ASSEMBLE

NEW 18 FT, OUTBOARD CABIN CRUISER Other models 8 to 23 Ft.

Rowboats, Outboards, Inboards




BETTER SHAVE Money Back Guarantee

Would you invest \$1.00 to learn how to get a better. Would you invest \$1.00 to learn how to get a better, smoother and cleaner shave every time you shave for the rest of your life—with no more razor cuts, nicks, burns and none of the lil after effects caused for the Shave-Base System and reasons why you should use the Shave-Base System and reasons why you should use the Shave-Base System of Instructions for shaving. They are the most logical and simple instructions ever offered to men who shave with a safety or straight edge razor and they are positively guaranteed to give you the best shave you will be shave to the shave that the safety or straight edge razor and they are positively guaranteed to give you the best shave you will be shave to shave you will be shave to really enjoy your shaving—Send \$1.00 today.

SHAVE-EASE SYSTEM 6605 Hollywood Blvd.

Dept. E-6 Hollywood, Calif.

40.000.000 N DAILY USE



Wherever you drive on the highways of America, more than 90 per cent of the cars and trucks you see rely upon AC Fuel Pumps for a steady supply of fuel.

More than 40,000,000 in daily service testify to the popularity of AC Fuel Pumps, among engineers and owners alike.

Since AC introduced fuel pumps, 25 years ago, more than 100,000,000 have been built, establishing an unparalleled record for reliability the world over. There's none better.





AC SPARK PLUG DIVISION

GENERAL MOTORS CORPORATION

Superior's New Model 670-A

COMBINATION VOLT-OHM MILLIAMMETER PLUS CAPACITY REACTANCE INDUCTANCE AND DECIBEL MEASUREMENTS

SPECIFICATIONS:



Volts. A.C. VOLTS: 0 to 15/30/ 150/300/1,500/3,000 Volts. OUTPUT VOLTS: 0 to 15/ 30/150/300/1,500/3,000 Volts.

D.C. CURRENT: 0 to 1.5/15/150 Ma. 0 to 1.5/15 Amperes.

RESISTANCE: 0 to 1,000/ 100,000 Ohms 0 to 10 Megohms

CAPACITY: .001 to 1 Mfd. 1 to 50 Mfd. (Quality test for electrolytics)

REACTANCE: 50 to 2,500 Ohms, 2,500 Ohms to 2.5 Megohms

Henries 7 to 7,000 Henries DECIBELS: -6 to +18 +14

The Model 670-A comes housed in a rugged, crackle-finished steel cabinet complete with test leads and operating in-structions. Size 61, "x01/2" x41/2". densers at a test potential of 150 Volts.

SOLD ON EASY PAYMENTS AT THE NET CASH PRICE

No interest or carrying charges added.

MOSS ELECTRONIC DISTRIBUTING CO., INC.

Dept. B-36, 38 Marray Street, New York 7, N. Y.

Please rush 1 Model 670-A SUPER METER, I am enclosing the down payment of \$7.40 and agree to pay balance, \$3.50 per month for 6 months.

NGINEE DEGREE

IN 27 MONTHS

Study Engineering in this world-famed school, established 1884. Demand for our graduates exceeds supply. Growing shortage of engineers. No field offers greater opportunities for responsible, iucrative positions. Bachelor of Science Degree in Mechanicai, Civil, Electricai, Chemical, Aeronautical, Radio (Television) Engineering; Business Administration and Accounting. Also 36-weeks certificate courses in Surveying and Drafting.

Personalized Instruction, Accelerated courses, Non-essentials eliminated, For ambitious, earnest students, Earn your degree in the shortest possible time. Preparatory courses, Placement

Extensive Campus. Well equipped, new and modernized build-ings; up-to-date labs. Low cost. New terms start quarterly. Enter September. January. March, June. -Mall Coupon Today-

TRI-STATE COLLEGE

5102 College Avenue, Angola, Indiana particularly interested in college and excelled information, I am particularly interested in college and excelled interested in College and Excelled in College a

ADDRESS. . _____

NEW AUTOMATIC DEFROSTER

ON EVERY FAST SALE!

Millions of defroster attachments and at \$13.50 and \$2.50 and \$1.50 and \$1.5

NO CHARGE for complete selling kit and offer of sample demonstrator. Rush name. If you've ever sold anything you'll clean up with HOLWIN. All mailed Free. Send name today for \$140-a-week opportunity. DEFROSTER SALES CO., 415LaSalleSt., Dept. H-9-S



SEND NAME Don't buy until you're satisfied, Rush name for free sales kit. Offer of demon-strator sample to all who an-swer this ad. Sales skyrocket-

+57 00 9g MASTER

p at your marvelous lightning-figures by 4 figures without multiplication! Big cloth-bour Sharpen up Your Brain Power

Includes worked-out problems, answers, etc. Sensa-tional bargain, only \$1.95, postpaid or COD plus post-age, Salf-Sacilon guaranteed or refund. Order this nazing "Short-Cut Mathematics" today! NELSON-HALL CO., 218 S. Clinton St.

Learn to apply this tremendous POWER, Develop will-power self-confidence, self-control. ANYONE can master this exciting profitable profession in short time by training at home, with GUARANTEED RESULTS. DON'T DELAY ... Write to America's oldest Hypnolic school for free information now—todayl

INSTITUTE OF APPLIED HYPNOLOGY Dept. 210, 120 Central Park So., N. Y. 19, N. Y.

MAKE YOUR OWN RUBBER MOLDS

WRITE TODAY FOR NEW FREE CATALOG earn to cast thousands perfect figurines, jues, book ends, ash plaques, book ends, ash trays, etc. Start TODAY! PLASTIC ARTS STUDIO NO EXPERIENCE **GREAT PROFITS**

X. L. Rubber Pts. \$2.50 Qts. \$4.00 (postage extra) Models and enough for 3 molds \$1.50 prepaid,

REMOVE TREE STUMPS

You can remove ugly tree stumps and beautify your yard with amazing fast-acting STUMP-RID. . . . Easy yard with analysi ass-racing SIOMF-RID... Lasy to use chemical compound; eliminates digging, grub-bing and chopping. Send only \$1.00 for enough STUMP-RID to remove a large stump. Postage pre-paid on cash orders. Satisfaction guaranteed.

JOHN'S CO. . Dept. H1, Girard, Illinois



LEARN NEW EASY METHOD AT HOME! Earn money in spare time drawing car-toons for magnaines. This book shows you step by step HOW to draw and WHERE to sell cartoons! Author is a leading cartoonist who reveals his tosled method in easy-to-foliow form that EVERTONE can learn!

that EVERYONE can learn:

S-DAY FREE TRIAL—ACT NOW!
Send no money! Order "CARTOONING"
bend no money! Order "CARTOONING"
bendings. Exposing a 10.8 pius Coplighted, return book for FULL REFUND. If
check or money order is enclosed, WE
PAY POSTAGE. Order NOW!

BLAFER PUBLISHING CO.

Box 1709, 175 Fifth Ave., New York 10, N. Y.

IDS HAIR TYPES



CAESAR SALAD. Oil your salad . . . not your hair! Give your hair IDEAL care. IDEAL'S new secret agent grooms without matting or gluing . . . makes thin hair look thicker, thick hair look naturally neat. Not animal, vegetable or mineral oil. You can't

see it, feel it, smell it! Put IDEAL on ... it's gone! All that's left is all-day grooming.

Get New Fitch Ideal. Hair Tonic

"GREATEST GROOMING DISCOVERY SINCE THE COMB"

THIS . . . **G** FOR AMBITIOUS



Aeranautical Televisian

Building

Have you had your copy?

120 pages of guidance to best-paid positions. Up-to-the-minute information for men who want to climb to the top. Tells how to get promotion, security and betpromotion, security and bet-ter pay through home study courses. This handbook "Engineering Opportunities" is free and entirely without obligation. Send the coupon. Make this your big year! Decribes over ninety courses

including : Mechanical Eng. Electrical A.F.R.Ae.S. I.M.I.C.E. Radio

(Pure

--- SEND COUPON TODAY -Canadian Institute of Science & Technology Limited, 551 Century Building, 412, 5th Street, N.W., Woshington, D.C.

Automabile

Please farward free of cost or obligation your hondback, "ENGINEERING OPPORTUNITIES".

Address.. Course interested in.....

Canadian Address: Canadian Institute of Science 551 Garden Building, 263 Adelaide St. W., Toronto, Ont. Defense Plans Mean Bigger Pay for Good Machine Shop Men!

OW You Can Be a ASTER MACHINIST

in this ESSENTIAL field Learn shop work quickly—with big course, the theroughly revised American Machinias' Library. How to operate lathes, drills, other machine tools; turning, other machine tools; turning, other machine tools; turning, lies and fixtures, drilling and surfading, opunches and dies auriading, opunches and distanced to the surfading open the surfading of the surfading open th



FREE 10-Days' Examination

a Master Machinist, Invaluable a Matter Matchinist. Invaluable help for anyone-from apprentice to shop executives. Packed with short-cuts. Will help to put you in big-pay class and to rate as an ESSENTIAL worker. Send no money, Mall coupon for 10-DAY FREE TRIAL. Note special price, easy terms,

McGraw-Hill Book Co., Dept. P5-10-52
327 West 41st 5t., New York 18, N. Y.
Send for 10 days PREE trial, the American Machinists 11.
Send for 10 days PREE trial, the American Machinists 11.
Send 48.75, plus postage, then; and 85 a month for 3 months. (Reg. price 835.75; you save 80.)

CHY & State.

WE'LL PAY POSTAGE If you enclose \$4.75 first payment with coupon. Same return privilege for full refund.

The NEW Model 50 UTILITY TESTER

an all-around electrical trouble shooter



 Measures A.C. and D.C. Voitages, A.C. and D.C. Current, Resistances, etc. will measure the current consump-tion while the appliance under test is in operation. The appliance or utility may be plugged directly into the front panel receptacle. A special pair of insulated clip-end leads is included for motors, etc.

Incorporates a sensitive direct-reading resistance range which will accurately measure all resist-ances commonly used in electrical appliances, motors, etc. This range will enable continuity checks and tests for shorts at

opens. The memoral content of the memoral condenses of the memoral cond

SHIPPED ON APPROVAL

No Money With Order — No C. O. D.
Try it for 10 days before you buy. If completely scisified sends
3.00 ond pay belonce or race of \$2.00 per menth for 5 months
—No Interest or Carrying Cherges Added, If not completely
suifified, return to us, no explonation necessary.

SUPERIOR ELECTRONIC CO., INC.
Dept. D-36, 227 Fulton Street, New York 7, N. Y. Please rush 1 Model 50. 1 agree to pay \$3.90 within 10 days after receipt and \$2.00 per month thereafter.

GOOD/TEAR

GOOD/TEAR

THE STORE

ATT BLAT BLOG. GIRAGO 4 BLOG. STATE AND STATE

REAL PANSY COASTERS Make Them at Home

EASY - FUN PROFITABLE



Now create new and truly diflerent gift articles like the
beautiful pany coaster shownmade by embedding real partiliquid casting plastic. With our
simple step-by-step method you
can make hundreds of valuable articles, including smart costume jewelry, chr. Hi-Style
buttons, colorful key tags, tie-clasps, curl
buttons, colorful key tags, tie-clasps, curl
with Manual, FREE
with Manual, inspiring New Home-Succes
with Manual, inspiring New Home-Succes with Manual, inspiring New Home-Success Plan. Write:

CASTOLITE CO., Dept. L-2, Woodstock, III.



GROW MINIATURE TREES Grow authentic, LIVE dwarf trees!

Fascinating hobby! Fabulous profit!

SEND FOR FREE SEED & INSTRUCTIONS! MINIATURE NURSERY CLUB

Dept. 6, P. D. Box 18696, Rimpau Sta. Los Angeles 19, California

TREASURE -- \$10,000 New locator detects metals, valuable erals and buried treasure. Money

back guarantee of superiority.

Also geige Govt. reward of \$10,000 for uranium discovery. Write for FREE info

THE GOLDAK COMPANY

LAWN ORNAMENT-NOVELTY PATTERNS 28 Lawn Ornament Patterns, 25c. Other patterns: 15-20' high: Dutch Girl, Dutch Boy, Pirate, Buil Terfer, Mexican Boy, Dwarf, Penguin, Flower Girl, 10c each, 25 Novelty Patterns, 30c. All 62 Full Size Patterns, \$1,00.

·FLYING DUCK

Wind revolves wings, Realistic appearance. Pattern, Instructions and wing Pinion Kit; brass bearing, steel shaft, wing lugs, bolts, nuts and washers, SOc. Pattern and Instructions without kit, 25c. STROTHER PATTERN SERVICE
Dept. 7 CT Box 128 Bellington, W. Va.





RELIEF...OR YOUR MONEY BACK Write now for free booklet and pictures of rupture care. You can be helped...work steady, with low cost, easy to wear Web Truss, thousands satisfied. Dept. PS-10, Hagerstown, Maryland



New "Trouble Shooter" Spots ANY Cor Trouble-FASTI New "Trouble Shorter" Sport AMY (or Trouble—FASTI Put your finger on Just about SVSIR! Cause of one New York Trouble of the Property of the Pr

EAT ANYTHING TH FALSE TEET

If you have trouble with plates that



If you have trouble with plates that slip, rock and cause sore gums—try Brimms Plasti-Liner. One application makes plates fit mughy uithout pauder for patter because Brimms your plate. It relines and refits loose plates in a way no powder or paste can do. Even on old ruber plates you get good results six months to a vary no powder or paste can do. Even on old ruber plates you get good results six months to a vary no powder or paste can do. Even on old ruber plates you get good results six months to a vary not good to the plates in a way no powder or paste can do refit loose plates in a way no powder or paste can do refit loose plates in a way no powder or paste can deal to the plate plat PLASTI-LINER INC., Buffalo 11, New, York - Dept. 41-J

BRIMMS PLASTI-LINER THE PERMANENT DENTURE RELINER



CARTOONISTS' EXCHANGE Dept. 1910-D, Pleasant Hill, Ohio



LOCKSMITHING INSTITUTE, Dept. PS-34
15 Park Ave.
Lic. by State of N. J. V. A. Amproved



Pesco Positive Hydraulic Pump

Displacement Ty George 12 Co. 10. George 17 No. 1P-348 Rated 1500 PSI, 227 cn. in. per rev. 1 GPM et 1500 RPM. Operating speed, 3758 RPM. Spilled shaft. Rotation either direction with slight add, 45° pipe ports, Mig. finner. Size. 5-916° 3 8½°, Used, guaranticed service ONLY \$9.95

BUY U.S. DEFENSE RONDS



\$34.95 BESTE CRAFT CO., BALTIMORE 14. MD. 1.0.b. Baltimore



Learn this Profitable Profession



IN 90 DAYS AT HOME

Money-Making Career Open to Men and Women, 18 to 60

Hundreds of men and women between 18 and 60 make \$10 to \$20 in a single day giving scientific Swedish Massage and Hydro-Therapy treatments. There is big demand from doctors, hospitals, sana-toriums and clubs. Graduates earn large full time incomes from treatments, There is his demand from doctors, hospitals, same-time to the control of the control

Charts

NEW 32-PAGE BOOKLET FREE THE GOLLEGE OF SWEDISH ANSAGE TIME

THE GOLLEGE OF SWEDISH ANSAGE THE PLAN OF SWEDISH ANSAGE THE SWEDIS

Please send me FREE and postpald New 32-Page Illustrated Booklet. Anatomy Charts and Success Booklet at once. YOU ARE

| | MAND |
|---|--|
| y you c | an draw! |
| | |
| | ART INSTRUCTION, INC. |
| | Dept. 10142 • 500 South 4th St. |
| No. of the last | Minneapolis 15, Minn. |
| | Please send me your FREE Talent Test. |
| | Name |
| Make money with your brush | Address |
| and peni if you like to draw, sketch, | |
| or paint, take | CityZone |
| Test. No fee. No obligation. | CountyState |
| Mail this cou- | Occupation |

SAVE UP TO 50% DOING YOUR OW OME REPAI NEW BOOK

You can save up to 50% on home repairs — and have lots of fun besides - if you follow the simple. easy - to - understand instruc-HENRY H. SAYLOR tions in TINK-ERING WITH TOOLS!

Tells you everything you need to know to cut repair bills-how to refinish floors and furniture, how to repair electrical appliances, and plumbing fixtures, how to lay sidewalks, shingle roofs, plaster walls, renew sash cords and hundreds of other repairs and improvements around the house! Never before has so much valuable information been crammed into one big cloth-bound volume to sell for only \$1.49! Books of similar size usually sell for \$2.50 or more!

SEND NO MONEY NOW!

Just mail coupon below and pay postman only \$1.49 plus mailing cost for this DeLuxe edition. If, after 7 days' examination, you wish to return book for any reason, we'll gladly refund every cent you paid.

| MAIL COUPON TODAY! |
|--|
| POPULAR SCIENCE—Dept. 1052 353 Fourth Avenue, New York, N. Y. |
| Send me the new 260-page cloth-bound book, TINK- |

| ERING WITH TOOLS. I will pay postman only \$1.49, plus postage, on delivery. If dissatisfied, I may return book within 7 days for full refund. |
|--|
| NAME |
| ADDRESS |
| CITY ZONE STATE |

□ If you remit now, we will pay postage. Same refund guarantee.

MASTER WATCHMAKING At Home - NOW!

CSW HAS REEN TRAINING MASTER WATCHMAKERS SINCE 1908

Why not be one of our successful graduates? Learn how Chicago School's streamlined training can speed your success. Previous experience unnecessary, Get the facts now!

SEND COUPON TODAY!

CHICAGO SCHOOL OF WATCHMAKING

Founded 1908

1608 MILWAUKEE AVE., CHICAGO 47, ILL.

Learn professional methods of watch repairing without leaving home or job ... enjoy a profitable hobby ... or prepare for a new career. The easy-to-follow Sweazev System shows you step by step how to fix watches from start to finish. It's fascinating! Can easily lead to a business of your own.

Tools, Supplies and Equipment all Furnished CSW's Master Course brings you everything you need to learn watch repairing at home. Included are: practice watches ... professional equipment-such as watchmaker's lathe and staking tool ... 200 more tool and supply items ... 51 special texts . . . and other aids to assure complete, practical, professional instruction.

FREE SAMPLE LESSON!

CHICAGO SCHOOL OF WATCHMAKING 1608 N. MILWAUKEE AVENUE, DEPT. 4102 . CHICAGO 47, ILLINOIS

Please send free sample lesson and full information on home

study course in Moster Watchmaking.

(This offer limited to USA and members of Armed Farces averseos. Other plans available far foreign students.)

Address

City

Zone ...

Improve Your NIGHT DRIVING Vision **INSTANTLY**



with Litenite NIGHT DRIVING GLASSES

Now you can IMPROVE your NIGHT vision and ELIMINATE 94% of dangeraus GLARE at once with this amazing new in-vention—LITENITE NIGHT DRIVING GLASSES. These re-markable glasses are made at special amber lenses that let markable grasses are finded at special source and through INFRA-RED light. INSTANTILY you see more clearly! Headlamps of ancaming cars look like saft, omber lights—yet everything else is in sharp facus. Amazing, unbelievable until yau octually put LITENITE and

Eliminates GLARE Relaxes Eves



LITENITE are NOT sun glasses but scientifically developed NIGHT LENSES used by cirplane pilois to see more clearly sports, WALKING of night. Beautifully made with 24 KARJ GOLD-PLATED AVIATION frame, comfort temples, adjustable naspeiace, wide-ongle issues, TREET Rich-locking Letherstein 11 you don't soy night driving is a pleasure! Send check or more order-form, or COD. REQUIAR Style only \$2.98. CLIP-ON Style for use over prescription glasses—\$2.25. Stote CONNINGER SELECT. SIEFFIRM DAY NIGHT WALKING WALKI

CONSUMER SALES CO., 516 Fifth Ave., New York 36, N.Y., Dept. 170



State

HERE'S: a valuable book of 130 Executed and findle where clarges with charts and instructions. Practical information you need to win security and promotion, it's yours PRES merely for examining Coyne's 3-volume Set COVERS EVENTYHING ELECTRICAL from home appliance repairs to indvanced AC-IC motors and equipment. Thousand policy of the Cover o

timers" can easily understand.

7-DAY'S FREE TRIAL Send for 3-Volume Electrical Set on 7

7-DAY'S FREE TRIAL, We'll include Shop

Prints Book FREE. If you keep FREE TRIAL, We'll include Shop

8-3 a month until \$15.50 pt just postage is paid (cash price: \$14.05.).

Or return the set in 7 days and owe nothing. Either way, Shop Prints

BOOK is yours to keep, FREE Mail coupon AT ONCE!



REQUEST TO SEE BOOKS Educational Book Publishing Division

| SOO S. Paulina St., Dept. A2-R8, Chicago 12, Ili. | |
|--|------|
| Rush 5-Volume Electrical Set for 7 day's FREE Trial per offer. Include Shop Prints Book FREE. | your |

Clock here if you are enclosing \$14.95. We pay postage.





RUGGEDLY BUILT FOR LONG LIFE ... PLENTY OF POWER FOR TOWING OTHER VEHICLES TO POWER FOR TOWING OTHER VEHICLES TO POWER FOR TOWING OTHER VEHICLES TO POWER FOR JUST AND THE SET OF TOWING THE SET OF TH

POPULAT SCIENCE **Editors** thought so much of the POWERCAR Junior that they ran a feature story in the September issue, Page 136.

Auto Battery Powers Cars for Kids

that starts your car drives baby hot rods at a brisk walk,

A FELLOW who was no basely with his mite in high school that he built an eight-tule radius set without a diagram is new building selective provered cars lost lads to play with. Detroit-born George Ford (no relation to Henry) calls his automobilis to: and

SAFE OPERATION! . Runs only while driver holds SAFE OPERATION! Runs only while driver holds his foot on pressure switch. Stops in a few feet when foot pressure is released "Positive action hand brake "Safe operating speed — no faster than a brisk-weak". No dangerous inflammable feel — not brisk-weak. No dangerous inflammable feel — work of the control of the completed adjustments. Seeps and starts by electric action. Will not run without a driver. Satisfaction guaranteed or full Purchase Price Returned. Send For Full Information About Children's Motor Vehicles and Special Offer.

MYSTIC RIVER SALES COMPANY Dept. Q-10 Myslic, Conn 11 S A



COLD WATER FAUCET!

INSTANTLY-Yes, you

INSTANTLY-Ves, you can whave continuously running HOT water with the JET IN-STANT HOT WATER HEAD.

Regulates from LUKEWARM to REAL HOT with a curr of the Ban. A cinch to attach. No tools needed. 110 Volt AC DC. Durably constructed of gleaning chromed steel and porcelain. 8 foot U.L. Cord.

10 DAY MONEY BACK GUARANTEE!

Send only \$1.00 deposit, balance C.O.D. plus postage. Send \$4.98 and we poy postage. THE JET must give you satisfactory service! SUCCESS PRODUCTS, 246 Roebling St., Dept. H-787, Brooklyn 11, N. Y.





\$6.98

TUBE TESTER

No Tube Manual or knowledge of tubes necessary—
Tests All Tubes—100 % ac.
opens, burned out tubes,
opens, burned out tubes,
Edward tubes,
opens, burned out subset,
opens, bur

SEND NO MONEY — ORDER C.O.D. plus postage, or send check, cash or money order & we pay postage.

\$8.95

E-Z TESTER CO. (Dept. PS-10) MACON, QA.



BUY DIRECT FROM FACTORY Write for free booklet and price list

INDEPENDENT IRON WORKS 2416 Eost 23rd Street, Dept. Los Angeles 58, Calif.

NVENTIONS Wanted At Once

If you want to market, or aell, your invention for cash or royalifes Write for our Free Booklet, Send no drawings. We also welcome hear ing from firms, or private capital, wishing to review inventions it any field. We will be glad to send notice of our clients inventions. GLOBAL MARKETING SERVICE

1404 Mitchell Street

FREE-Amazing Book on RHEUMATISM, ARTHRITIS

If you suffer the aches, pains and disconfiorts of Rheumatism, as manifested in ARTHATTS, NEURITIS, SCIATICA or Dotton facts about why drugs and medicine give only temporary relief without removing causes, Explains Iully a proven, specialized system of treatment that may save you years of distress. No obligation, Write for this FREE Book today? BALL CLINIC, Dopt. 38. Excelsior Springs, Mo.



When Writing to Advertisers. Please Mention Popular Science

| FREE! | GET | BIG | 34- | PAGE | CAT | TAL | .00 |
|-------|------------|------|------|------|-----|-----|------|
| | | | | | | | |
| | NICHT | HOOD | AFRO | | | | **** |

| Tells how to | 1525 E. Broadway, Hawthorns | (Los Angeles County), Cali |
|---------------------------------------|-----------------------------|----------------------------|
| AVIATION CAREER in | Name | Ape |
| Aeronauticat Engineering | Address | |
| and Aircraft & Engine Mechanics | City | _ZoneState |

FOR JEEP, DODGE, CHEV., GMC, STUDEBAKER, 4 WHEEL DRIVE AND 6 WHEEL DRIVE, ALSO PARTS CATALOG. WRITE

AXLES FOR TRAILERS



(Surplus) Heavy Duty axles suitable for building of many types of trailers, farm wagons, etc.
Standard width straight axle, 2
inch square and is complete with
Hubs, Timken
bearings, 6 Hole

Dual Wheels.....add \$15.00

NEW JEEP TOPS and CURTAINS Military type, easily adapted to civillan type Jeep, Complete top & back curtains, side cur-tains, snapon doors, 5 windows, Waterproof,

Jeep, Complete top & Dack curtains, side ciritins, saspon deep, S. visilons, Waterprod.

All prices quoted good 30 days FÖB, Kansas City
AEEP UNITED AUTO PARTS CO. INC

1901 TROOST-6P1800-KANSAS CITY MO

1901 TROOST-6P18000-KANSAS CITY MO

1901 TROOST-6P

Write for FREE b

LASALLE Extension University, 417 So. Dearborn St. A Correspondence Institution, Dept. 10131M, Chicago 5, III.

MAKES LOUD BANG! Midget una shoots blank cartridges! Loud bang! Working model of responsible to the control of REAL PISTOL

JOHNSON SMITH COMPANY, Dept. 596, Detroit 7, Mich.



TALK—SING—PLAY OVER YOUR RADIO IN INTERPRETATION OF THE PROPERTY OF THE PROPE

EN! Do You Suffer

Pains in Lower Back, Hips and Legs; Low Vitality, Nervousness, irritability, Night-Rising, Bladder Trou-bie, Forgetfuiness, Sleeplessness; Weak, "Worm-Out" Feeling and a General Decline in Health? If so, then send for our Free "facts" backlet containing much information of value to you. Booklet ing much information of value to you. Booklet is mailed together with Questionnaire Blank in plain wrapper. **Don't Delay!** Send for your copy Now! NO OBLIGATION.

| | | | м | | | | | | | | | | | | | • | • | | | • | D. | | | | | | | | | |
|-----------|----|-----|----|----|---|---|----|----|---|---|----|---|---|---|----|---|---|----|---|---|----|---|---|---|---|---|---|----|-----|----|
| MILFORD, | × | A | N: | SA | s | | | | | | | | | | | | | | | | | | | | | | | | | |
| Gentlemen | : | Pl | ea | se | e | S | eı | 10 | l | n | 16 | • | у | 0 | ur | | F | re | e | ٠ | F | a | t | • | • | в | 0 | oŀ | ιle | ŧ. |
| NAME | | | | | | | | | | | | | | | | | | | | | A | G | E | | | | | | | |
| ADDRESS | | | | | | | | | | | | | | | ٠. | | | | | | | | | | | | | | | |
| CITY and | œ, | ra. | TI | , | | | | | | | | | | | | | | | | | | | | | | | | | | |

MAIL THIS COURON

"WHAT A

Wonderful Easy Way to Learn Music!"



START PLAYING RIGHT AWAY-Even If You Don't Know a Single Note Now! FREE BOOK Tells All About This "Easy As A-B-C" Way

magine learning to play music RIGHT AWAT! Yes—
plano, guitar, accordion, or any other instrument.

Plano, guitar, accordion, or any other instrument.

Plano and the state of the state of

THEY ARE PLAYING -SO CAN YOU!

Mt. Veraon. a short time I and play pieces In a hymn book entertain

at partics-play at church,

Welk. famous

dances.

bond leoder: "Got my start in music with vonr Course How easy it is to learn to read notes and play an instrument

Mrs. Dallas B. Kerk, Lodge-pole, Nebr.; 'Never dreamed 1 would ever would d eve

I would eve play, Dldn' know a note, To dnv I play de lightfui pieces after only ; menths."



FREE BOOK

Why keep missing out on the fun of music. . . . the good times, interest. THE 30-9 per book and a Prec Copy of our simple. 'Optim-and-picture' lesson-Sample. No obligation: no School of Music, Studio B-151.0, Port Washington, N. Y. (Special Reduced Prices on Instruments to our other studios.)

Takes "Mystery" Out of Music No wonder over 850,000 people have taken up this famous home-learning method! Takes the "mystery" out of music.

the "mystery" out of music. Explains everything step-by-step—so clearly even a child "catches on" at once." KNOW A NOTE NOW-you'll soon be playing so well that family and friends will be amazed. No months of "preparation." Start right in oa slimple pieces—REAL music.—by NOTE.

| | | | | | | | ic, Y. | Stu | dia | B1: | 5 10 |
|-----|------|------|-----|-----|-------|------|-----------|--------------------|------|------|------|
| Sac | mple | | vo. | obi | [grat | lon- | -n nd | d F no reste | sale | rama | n t |
| /- | | Inct | | ant | | | | | | | |

Address......

| ie. | | i | 'n | • | ċ | 2 | ċ | | | • | ٠, | N | | ٠. | | ì | | • | ; | | 13 | ; | | S | t | ni | | ٠. | | | | | | | |
|-----|---|---|----|---|---|---|---|---|---|---|----|---|---|----|---|---|---|---|---|---|----|---|---|---|---|----|---|----|---|---|---|---|---|---|--|
| | • | • | | • | | • | • | ٠ | • | | | • | • | • | • | | • | • | • | • | • | • | Ī | • | • | • | • | • | • | • | • | • | ī | • | |

"TOOK IN \$217 FIRST 10 DAY

Some make more, some less ..

We help you to start Your Own All-Year Business

Make Big Money! With our easily operated, highly efficient wall washer, Chas. Stelle took in \$217 gross in first ten days. E. L. Goss took in more than \$10.000 in one year, E. C. Taber wrote, "I made \$400 gross in two weeks." And no wonder—this machine washes walls 6 times faster and better than by hand.



State

Your Money-making Opportunity. We want more men to go into this profitable business for themselves and enjoy independence. Customers everywhere - homes, offices, schools, churches, hotels, etc. What you take in is mostly profit. No need to rent shop or office: operate business from home

Lose no time. Get all facts without obligation FREE BOOK! MAIL COUPON TODAY!

VON SCHRADER MFG. CO.

2031 "W" Pl., Racine, Wisconsin

Send at once (no obligation) your FREE booklet containing information about your WALL WASHING MACHINE and how I can start my own permanent, profitable business.

Address

BENJAMIN SUPER CO, GAS **PISTOL NEW!** Different

SAFE . NON-TOXIC . HI-POWER ACCURATE . ECONOMICAL CONVENIENT . PRACTICAL

sy to operate-Uses low cost Soda Cartridges. oots Cal. .177 Benjamin H-C Pellets & Darts or BB. \$1500 rite Today for liustrated Folder of Ali Models. njamin Air Rifles and Benjamin Air Pistois.

Benjamin Air Rifle Co., 852 Marion St., St. Louis 4, Mo., U.S.A.



this opportunity. RUSH letter OK. Don't delay. State your AG 2513 Elwood Bidg., Omaha 2, No W. SCHOOL OF TAXIDERMY

. HIGH VOLUME . PRECISION BUILT . OUIFT HEAVY GAUGE STEEL • OVERSIZE BEARINGS wheel; outlet DIMENSIONS: 103 Height

less Mtr. & Drive with Mtr. & Drive \$44.95

Exhaust Fans, ers, \$7.95 up. Guards, Shutter rated catologue, deoler inquiries invit

WESTAIR FAN AND BLOWER CO. and River Ave., Dept. 5, Detroit 8,

TOPS FOGGY WINDS

SAMPLES FOR AGENTS KRISTEE CO., Dept. 712.

SUCTION CELLA

TER, Just connect to a handy faucet with garden hose, submerge in flood water, run another learth of hose to open drain or out a window, the control of the

Money-Bock Gu BRAND NYLON STORAGE COVERS

for eutdoor storage of cors, boots, mochinery, equipment, etc. Strongest, lightest covers ever made. New DuPont Nylon 2-ply made, New DuPont Nylon 2-ply
with fused waterproof coating on
nylon cloth. Folds away casily,
Secured with heavy elastic Protection against wind, rain, sun,
sati-air, mildew, etc. 15-day moneybock guarantes. Not to be confused
with plastic evers selling for less!

Give Standard Size

Size for Cad-dy, Line., etc. \$2.50 cxtra nine 70c mastere Nyion tarps to order with brass grommets, &c sq. ft.

DEFENDER TEXTILE CORP., 317 Canal St., Dept. PS, N. Y. 13, N. Y.

TRUSS WEARERS

demonstrator — proves that greater safety and comfort can be yours im-mediately. No obligation. Send post-card for details.

ACTIVE MAN TRUSS CO. 549 W. Rondolph St., Dept. PS-10, Chicogo 6, III.



MAKE MONEY FAST Now Till Christmas!

SELL EVERY BUSINESS

SELE EVERY SUSINESS

Exclusive "Greetingletters"

Exclusive Tax making opportunity that's

Exclusive Tax making opportunity that's

Exclusive Tax making opportunity distinctive

CHRISTMAS LETTERS ... attractively

Initiate from Exclusive Tax making the Tax making the

CHRISTMAS

GREETINGS

Rush Name and The SUCCESS Corporation, Dept. D-7 Address Today! 158 W. Magnolia Av., Ft. Worth, Tox,

SENSATIONAL PTICAL BARGAIN

MAKE YOUR OWN ASTRONOMICAL TELESCOPE

SLIDE PROJECTOR SETS Consists of all unmounts

sect = 4038-M - 21.5 " and " be for invested storage and the sect = 4038-M - 21.5 " but a sect = 4038-M

Stock #10-N-80 lenses 10.00 p

Order By Stock No. We have literally Millions of War Surpius Le
Prisms for Sale at Bargain Priees. Numerot

of Instruments. Tool Write for FREE C EDMUND SCIENTIFIC CORP., Barrington. N. J.

SMALLEST .22

132 vg remedit show Automatic. Neets sportunents commende for possible shows a state of the stat crime of violence." Snipped F.J.B. Cannot be accepted. Mail Orders Only. Satisfaction or Money back! UNITED ARMS, 9043 S. Western Ave., Dept. FA-145S, Chicago 20.



HE-MAN VOICE!

STRENGTHEN your voice this tested scientific way. Yes—you may now be able to improve the Fower of your apeaking and ainging voice. . . in the privacy of your own room! Self-training lessons, mostly atlent. No music required.

allent, No music required.

FREE BOOK Feuchtinger's great booklet

"How to hevelop a Successful Voles." It's
Booklet mailed postpaid in plain wrapper, No salesman will call, Send your name and age Right Now!

210 S. Climton St. Studio WY-1, Chicago 6, III.







342 Allantic Ave., Boston 10, Mass

How to get more milegge out of your motoring dollar



Check your car's wiring—and you may avoid road breakdowns, battery failure or a

destructive car WATCH FOR LOOSE OR FRAYED WIRES fire. Watch for bad insulation, loose connections, spots where wires may be rubbing against sharp metal edges. Keep several spare fuses in glove compartment, too.

Clutch facings will not take a "riding" ... your pocketbook

will suffer an unnecessary drain if you "ride" the clutch. "Holding" on hills with the clutch is



CLUTCH PEDAL IS NOT A FOOT REST wasteful, too. Use your clutch only for starting and shifting ... it will last longer ... save you money.



Keep a fresh oil filter on the job. Your oil filter can trap more than 2 pounds of sludge and abrasives in 5,000 miles of normal driving-may get so choked up it can't filter out harmful abrasives any more. Before that happens, install a fresh Purolator* Refill, Purolator's

REPLACE CLOGGED OIL FILTER matchless, accordionpleated, plastic-impregnated element gives up to 10 times more filtering area . . . traps gritty particles as tiny as .000039" in diameter . . . saves you expensive engine repairs.

Yet a Purolator Micronic* Refill costs as little as \$1.60. *Reg. U.S. Pat. Off.

> Check your oil filter every time you change your oil





BEAUTIFUL RICH-LOOKING ACCESSORY

All vital elements e cosed in precision "oir-light" chrome cose - sealed and nteed o lifetime Ail equipment and copper cable included. Easy to Install - no

Fits All Cors & Truck Lets you DRIVE IN SAFETY & COMFORT **NEW revelutionary discovery**

"Ergon Lens" and other elements produce a BLACK RAY— (almost invisible to the eye) that shines down on your windshield. This ray COUNTERACTS THE GLARE from ning headlight street lights, etc. PREVENTS WIND-SHIELD FOGGING AND ICING TOO. WORKS LIKE MAGICI **FULL MONEY BACK GUARANTEE**

This new product rese of research and testing secret ligh vios. Send only \$1.00

for C.O.D. delivery,

ELECTRONIC DEVELOPMENTS, Dept. A-10 Box 775, Portland 7, Oregen Enclosed find \$

Rush Palarvisien Light:
Paid C.O.D. Dest Rold

U.S. NAVY PELORUS SIGHT

oot owners, surveyors, farmers, co tors, pilots, scouts, and others will find this precision "bearing taking" instrument extremely practical. Sighting tube is grad-uoted through 360°. Fixed positions con be determined for true or relative bear-ings. Gov's cost more than \$50.00. Like New postpaid \$4.95





Pigneer sensitive oltimeters. Rande 0-35,000 ft., calibrated in 100's of feet. Barametric setting adjustment. No hook-up required . . . for outo or oircroft installation Used, Good \$12.95

U.S. Navy surplus oltimeters. 0-10,000 ft. Adjusts to seo level setting of terroin, Requires no hook-up for outo or aircroft installation

BRAND NEW



GENERATORS 115V-AC

FOR AUXILIARY LIGHT PLANTS NOW...here's the buy of the yeor. Brond new Eclipse Generators in the original box. These generators have an AC autput of 115 valts, 10.4 amps, 1200 wotts, single phose, 800 cycles at 2400 R.P.M. They also have DC output at 28.6 valts, 60 amps. The unit has a spline drive shoft and is self excited. It will serve as a dependable 115V-AC ouxiliory light plant when driven by a gosoline engine for forms, cottages, flood lighting, trailers, boots, or wherever power is not readily accessible. Shipping wt.

55 lbs. Gov't cost more than 10 times selling

\$29.95

price, F.O.S. Posodeno All Equipment F.O.B. Pasadena . Enclase Full Amount with Order

> Sales Company Box 356-OS East Pasadena Pasadena B. California



Note, you can reughbler your own ear and others. Save reuser in part of the part and the part of the p

PURIFOY UPHOLSTERY SERVICE

P. O. Box 3042 602-A South State Street Jackson, Mississippi



AMAZING NEW RADIO

POCKET SIZE RADIU
NOTUBES, BATTERIES OR ELECTRIC "PLUGINS" NEEDED. "TUNES IN" MOST LOCAL
RADIO STATIONS WITH STATIC-FREE CLEAR
TONE, Has new perma-crystal diode and TINY TONE. Has new perma-crystal diode an SELF-CONTAINED SPEAKER PHONE...

ery. COMPLETE ready to play. By mail only from: MIDWAY COMPANY DEPT, PPS-10 KEARNEY, NEBRASKA



BOOKS PUBLISHING CO., 56 W. 24th St., N.Y. 10

Reduce RADIO SIMPLY PLUG Radio or Appliance cord

LINE - NOISE ELIMINATOR: into Noise Eliminator and plug into wail socket, the free from many distracting noises, Send No postman \$1.25 each (2 for \$2.00) plus postage and we'll mail postpaid. Try 5 days, money bac lighted.

MERIT SALES, DEPT. 4225 Fldono Dr.

K-27 \$2.00

CLEAR-TONE -



All necessary lapidary equipment is fur including a super-charged diamond blade for all wheels for grinding, shaping and polish plete instructions. The complete equipme-less motor and belt, for only \$29.50, f.o.b., Burlington, Wisconsin. Write

BEI MANUFACTURING CO. Dept. M Burlington, Wis.

COMPLETE NEW



24 HOURS FROM YOUR OLD

NOW LOW AS

New process transforms old, broken or loose plates.

DED, Let to new lightweight plastic plates, not new lightweight plastic plates, the plant p

SEND NO MONEY

-Just rush your name and address for full
FREE DETAILS. If your teeth are loose,
we'll tell you how to tighten them before duplication. Act now.
Tru-Grip Dental Labs., 7th Fl., 127 N. Dearborn, Dept.177, Chicage 2, Ill.

60 POPULAR SCIENCE



"This proves Wildroot Cream-Oil keeps hair well groomed even if you have cowlicks!"



"He keeps his Wildroot Cream-Oil there because it's his hair's best friend"



"Since using Wildroot Cream-Oil I look twice as good!"

REAMER KELLER

YOUR HAIR'S CREAM-OIL STREET AND LANGUAGE AN

LEARN - Trades that Pay More

WATCHMAKING OF ENGRAVING

Don't let a lay-off catch you. START NOW TO LEARN THESE HIGH-PAYING TRADES IN YOUR SPARE TIME. Earn extra money as you learn, repairing clocks and watches, or engraving silver and jewelry. YOU WILL BE BUILDING YOUR OWN BUSINESS RIGHT AT HOME.

KANSAS CITY SCHOOL OF WATCHMAKING

Wiring Repairs Made EASY! MOTOR'S Brand-New Guide Shows How to Do ANY Wiring Repair-on ARY! Consult Transport See His Motor ARY! Consult Transport See His Motor Ary (TO WHEN A guide

Car Built from 1941, THROUGH 19521. TWO INTEREST OF THE PROPERTY OF THE PROPER

AMAZING IMPROVED ELECTRIC SPRAYER MAKES HOME PAINTING EASY

Why wear yourself out using Expensive oid-fashioned brushes. MINTIFIER SPIRAYER quickly, smoothly and evenly sprays glossy enamels, incquers, insecticides, mothproofers and oils. All in one self contained unit that requires no compressor, motor or accessories. All metal non-corrosive parts makes this unit a LIFELONG useful tool. Sturdly constructed weighs only 2 lbs., uses standard replaceable Mason jar. Supplies that the standard of the standard part of the standard



PAINT AUTOS

titions, concrete brickwork, rough wood, boats, wagons, screens, cabinets. Venetian bilinds. Wonderful for Mothproofing clothes, rugs, drapes, storage closets, etc. MIS-TIFIER is Safe and Easy to use.



We Guarantee that MISTIFIER SPRAYER will apply paint smoothly, quickly, easily—or return it within 10 days for full purchase price refund. Only 89.93 Postpaid or sent C.O.D. plus postage. Full Instructions, Order Now.

IMPERIAL SALES, Dept. S-495 480 Lexington Ave., New York 17, N. Y.



SEND NO MONEY

MORE THAN 4000 PAGES 2750

PICTURES

COMPLETE BOOKS BUILDING, ESTIMATING, CONTRACTING

Examine this Up-to-Date Edition for 10 days. See how these nine books supply easily understood training that will help you to get a better job and make more money, or start a profitable business for yourself. Think what a BIG help it will be to have them handy for use in solving all sorts of building problems. them many in use in soving an soles of noticing proteins.

Learn to draw plant, estimate, do all-new construction and the soles of the

In our more than 50 years we have never offered more complete building information. Send the coupon TODAY. (A year's consulting privileges with our engineers now given with these books without extra cost.)

AMERICAN TECHNICAL SOCIETY—Publishers Since 1898 Dept. G720, Drexel Ave. at 58th St., Chicago 37, III.

Dept. 07.20, Second New Grand St., Checker St., St. Contracting Books. I will pay the delivery charges only, but if Lehoose Keep them, I will send you 83 plus postage and pay the balance at the rate of only 84 a month until \$34.80 has been paid. Include consulting service as offered above.

City

Please attach letter giving employer's name and address (if self-employed give business man reference). Men in service please give home address.

CORTINA CORTINA makes it FUN to

ITALIAN-BRAZILIAN-JAPANESE "Learn by Listening" to CORTINA RECORDS, at home, the NATURAL way — quickly, easily, cheaply.

Only 15 Minutes a Day!
The CORTINA method, famous for 70 years, teaches yo
to speak like a native. THOUSANDS have found it th
most fascinating, most effective way to learn languages for
Pleasure, Bushness, Travel, Culture. INVESTIGATE!

Send For FREE BOOK!

Hiustrated 32-page book, "The Cortinaphone Short-Cut" sent FREE. No obligation. Tells just what you want to know. Interesting. Get it!

| UNBREAKABLE RECORDS | TODAY |
|---|-----------------|
| CORTINA ACADEMY (Est. 1882) Suite 1210, 105 W. 40 St., N. Y. 18 Please send me — without obligation — I am interested in (check) French Spanish German — Itali Russian — Japanese | your free book, |
| Name | |
| Address | |
| CityStr | ate |

LAWNMOWER SHARPENER OPERATORS Increase your output... Year 'round business!

NEW BED KNIFE GRINDER

sharpens all STRAIGHT FDGF TOOLS

New Ideal Bench Grinder

doubles your output of sharpening jobs, speedily grinds straight blade knives. Sharpens all kinds of straight edge tools and ice skates. Write for FREE, fact-filled folder

THE FATE-ROOT-HEATH COMPANY Dept. PS-10, Plymouth, Ohio



LEARN TO

Why is a loss 0, unspecials will-lower most modern to the old feworltes—at home, in private without techer, music to did rowelles—at home, in private without techer, music can be seen to be a second of the control of

ROLLDEX, P. O. Box 516, Dept. D-85, Safety Harbor, Fla.

ROOMS 4



For Saven Hundred Fifty Dollars and 30 days of your yourself this Beautiful Home. Living room 11x15. Front bed, Kitchen ball, Hath 5x8, Hall 3x4, Windrous steel Casement windows, bridge you Step by-Step Instruc-tion. He had been been been been been to the beautiful Hambert Step Land Beautiful Hambert Step La

OOL-CHEST" \$298

7 HANDY ALL-PURPOSE TOOLS Complete With Leatherette Case Man-Sizedi Convenienti

A Saw An Awi A Tacklifter A Recessed Screwdriver A Chisel
A Small Screwdriver A Large Screwdriver
Twistl-And 7 Tools Are Ready To Usel Yours...
Guaranteed for \$2.08 Fostpald.

MAIL MART, PS10, 27 East 22nd St., New York



Perfect for Home-PAGING SYSTEM, He room to room, hos GARAGE-ATTIC-BA

♦ Userelly 34.05 1995

coble between units, Sq ft.) This is a TESS Order new. Send check or M.O. 1\$2 dep. EASTERN PRODUCTS CO. Bapt. P, 1170 Swe





CORCED AIR INSTALL IT YOURSELF AND SAVE

CONVERT YOUR GRAVITY FURNACE TO MODERN QUICK FORCED AIR HEAT, IN-MODERN QUICK FORCED AIR HEAT: IN-STALL MCLARTY FANS IN YOUR COLD AIR PIPES. NO SHRET METAL WORK REQUIRED, SIMPLE ELECTRIC CONNEC-TIONS. LOWEST COST SYSTEM TODAY.

McLARTY SYSTEMS 2608 DICKMAN RD. BATTLE CREEK, MICHIGAN

In Canada Write WINNIPEG SUPPLY & FUEL WINNIPEG, MANITOBA

FREE CIRCULA

FREE

COURSE of INSTRUCTIONS

Yes, we'll teach you at home how to make the most beautiful things you have ever seen! Everything from novelties. ful things you have ever seen! Everything from noveltie gadgets, beautiful jewelry, gems, machine parts, lures, gadgets, beautiful jewelry, gems, machine parts, lures, per seen the gadgets of the gadge

SUCCESS GUARANTEED

The ONLY limitation is your imagination! No special talent, no previous experience, no special tools or machinery required! We not only TEACH you how to make these things but we show you how easy it is to dispose of your show you how easy it is to dispose of your production, even selling part or all of your output to us! We will actually PUT YOU IN BUSINESS OVERNIGHT AND GUARANTEE YOUR SUCCESS! Yes, we'll set you up in the most fascinating business you ever dreamed of! In just a short time you'll be manufacturing sensational products of endless variety. it's all very fascinating and simple!

HOW TO START Just send 25c for our big 56 page

catalog which elaborates on PLASTICAST ESS: we will include your first book of instructions PLUS complete details of the most amazing offer that will ever come your way! Do it today...don't de-lay anything that can be so important to your future!





NEAREST OFFICE

OME OF THE BOOKS AND LESSONS WAITING FOR YOU!

CASTING

LESSON 13

GOLDEN

OPPORTUNITAGE

BIG BUSINESS

IN BUSINESS OVERNIGHT! SUCCESS GUARANTEED!

Illustrated at the left are just a few of the THOUSANDS of useful and attractive things we teach you how to make without anv tools or machinery . . . simply by CASTING

CASTING!
You can start your own HOBBY AND
NOVELTY SHOP in your own community. We will actually put you in business, supply you with ALL the merchandise you need and GUARANTEE YOUR
SUCCESS:

SUCCESS:
Or you can start your own PLASTICS
FACTORY and manufacture an END-LESS VARIETY of beautiful and useful things for others to sell! Elther way, we supply all the materials and instructions!

Send 25c for Full Particulars and Big Catalog!

We have THOUSANDS of unusual products and materials of humense interest and value to inventors, mold, die, tool and model makers, hobbysts, craftsmen and to every ambitious individual seeking



Dept. A

P.O. BOX 6737, CHICAGO 80, ILL. P.O. BOX 987, PALO ALTO, CALIF, CANADIAN READERS: Please send 35c to: Canadian Ind. Plastics. 10561 2 W. Pender St., Vancouver, B. C.



JOE ESSENTIAL

IT'S EASY WITH CEI TRAINING & COACHING AT HOME OR AT THE INSTITUTE IN CLEVELAND

There is a growing, desperate need for draftsmen—the key men in all Industry. CEI can quickly give YOU the necessary technical skill. From the necessary technical skill.

Bigger income, jobs, and opportunities are yours with a CEI diploma, Thousands have succeeded. So can you! CEI guarantees to train you until you qualify. Write today! No obligation—no salesmen.

CLEVELAND ENGINEERING INSTITUTE 6300 EUCLID AVE., CLEVE. 3, OHIO

☐ Aeronautical ☐ Mechanical ☐ Training in Cleveland NAME... ADDRESS

CITY.. STATE. penny postcard

CLEVELAND ENGINEERING INSTITUT 6300 EUCLID AVE. CLEVELAND 3, OHIO



CEI success book



OCTOBER 1952 63

Electrical Appliance Repairs MADE EASY

Repair on ALL Home Appliances

Repair on ALL Home Appliances
NO repair job is too tough with the help
SHOWS how to service ALL home applispillances like new-or MAG. MONEY
with a home repair shop of your own . . .
O'VIES 850 "Thow-to-fu-fil" pages
with a home repair shop of your own . . .
O'VIES 850 "Thow-to-fu-fil" pages
rame, sectional charts locate
prame, sectional charts locate
to express the section of the section of

FREE 10-DAY EXAMINATION-Cou-

Covers ANY Service or Repair on: Irons • Toasters •

Electrica Annliance

Heaters . Vaeuum Cleaners • Sewing and Washing Machines · Refrigera-tors · Air-Conditioners . Fans .

FREE 10 DAY EXAMINATION—Con-pon will bring you "Electrical ap-pillance Servicing" to examine FREE "without obligation, skal it NoWY

McGRAW-HILL BOOK CO., Inc., Dept. PS-10-52
327 West 41st 5t, New York 18, N.Y.
Send. (Youse's Electrical Appliance Servicing for 10-DAY monthing. Otherwise, I will keep It—and only \$23.09 quits small delivery charge; then—and \$3.00 a month for 2 months to complete pagment.

PS-10-59 Employed by Zone No.

City State (if any) State

WE'LL PAY DELIVERY If you enclose \$8.50 (check or built before the coupon. Same 10-day Return Privilege, for

New Amazing Invention-"Magic Art Reproducer"

NO LESSONS! NO TALENTS! Can Draw Your Family, Friends, Anything From REAL
ne Can Draw With ____ LIFE—Like An Artist Even if



Also Excellent for Every Other Type of Drawing!

Other Type of Drawing!

Human Figures 6 Quidoor Scenes, landscapes, buildbowls of fruit, lamps, furniture, all objects 6 Copy philoso, other pictures, portraiture, all objects 9 Copy philoso, other pictures, portraiture, decorations, etc., for woodwork, machine, for needlework, crocheting, knilling 6 Copy all cartoons.

FREE! "Simple Secret of Art Tricks of the Trade"
The valuable lituatrate guide is yours FREE with order of 'Magit Art Reproducer. 'Easy follow on different techniques, effects, proportions, perspectives, shading, color, animated with 'Magic Art Reproducer' for added touches to your drawing.

or smear toucnes to your SEND NO MONEY!

SEND NO MONEY!

Free 10-Day Trial!

Just send name and address.

Pappostman on deliver 10-day

19-18 with order and we pay

postage. You must be conthing like an artist, or return

merchandise after 10-day trial

tunded.

Norton Products

ting o Copy all cartoons.

Yee, anyone from 3 to 80 can
draw for sketch of paint anytime you use the Market Art
known and the Market Art
known at the Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
known at the
Art
kno

Dept. 4410H, 296 Broadway New York 7, N. Y.



Before You Buy Your Trailer-READ...

TRAILER TOPICS MAGAZINE

It brings you the latest in Trailer Coaches—Equipment—Accessories—Trailer Trips—Trailer Parks and many other interesting monthly features at only—\$3.00 for 2 years.

(6 MONTH TRIAL SUBSCRIPTION \$1.00)

TRAILER TOPICS MAGAZINE (Room 1582) 28 East Jackson Blvd., Chicago 4, III.

BOYS! TOWN RADIO

Make your own simple, tubeless, batteryless Crystal Italio, SEND 25 of as GENUINE MELOMITE CRYSTAL with complete illustrated instructions for making your own set. Crystal sent postpaid with instructions and our own publication. "THE MAGIC CRYSTAL" which is full of news, diagrams, questions and answers

SEND 25¢ FOR YOUR CRYSTAL TODAY! ALVA ALLEN RADIO Dept. PS-10 Clinton, Mo.

Find HIDDEN TREASURES

GEIGER COUNTERS for Uranium Detection (see at left). TREAS-URE DETECTORS for gold, sliver, etc. Lightweight, ultra sensitive. None finer at ANY PRICE. INFORMATION FREE.

Detectron co. 5631 Cahuenga, No. Hellywood, Calif.

RUPTUR

Get Relief This Proven Way

Why try to worry along with trusses that gouge your flesh—press heavily on hips and spine—enlarge opening—fail to hold rupture! You need the Cluthe. No leg-straps or cultimate the control of the contro

CLUTHE SONS, Dept. 14, Bloomfield, New Jersey.

Wonders Through The



POPULAR SCIENCE MONTHLY, Dept. 1052 353 Fourth Ave. New York 10, N.Y.



"Grafted fully finished 34" heavy duty hardwood stock.
Crafted to meet highest archery requirements. As large manufacturers we can mass produce this \$45. Fig. 19 to 19



Make Your Own Concrete BLOCKS and BRICKS To Use or Sell

New superior moulds make absolutely square, true, easy-to-lay blocks which will pass any building code. Production is fast . . . easy. One durable \$30 blocks per minute-1,000 a day. Pays for itself in one day! Sell blocks for big profit . . or save % building cost for yourself. PoST CARD BRINGS PREE FOLDER.

ECONOMY MFG. CO.
DEPT. S STONE MOUNTAIN, QA.



CAN PUT YOU IN A

Rush Card TODAY for FREE SELLING DUTFIT OF ILD RESERVED FOR THE SERVED FOR THE SELLING OUTPIT SHOE SYSTEM SERVED FOR THE SERVED FOR THE SELLING OUTPIT SHOE SYSTEM SERVED FOR THE SE

HOLLYWOOD BRONZE SUPPLY SHOE MOUNTINGS

Are NOW AVAILABLE wholesale from our Eastern Distributor to give you FASTER Service at LOWER Costs! Send orders or requests for NEW Price Lists to:

HOLLYWOOD BRONZE SUPPLY of OHIO



Demand This Trade Mark

Asbestos Gloves for HOT Jobs

Handle bot things with safety, we are industrial is a mouse with the same and the s

INDUSTRIAL GLOVES COMPANY
A Corporation

1422 Garfield St., Danville, III. In Canada: Safety Supply Co., Toronto



BE YOUR OWN BOSS! Big Money waiting for you today in floor surfacing! Hundreds of prospects near you! The floor next door may be your first job—and business mushrooms as folks tell others. Earn as high as \$50 and more a day sanding floors with an easy-to-run American Machine. Pleasant indoor work—steady the year round. A sound opportunity to get in something for yourself and be your own boss! No schooling—no experience needed. Only small investment in sander gets you started to success! Send coupon for "money-making booklet" entitled "Opportunities in Floor Surfacing"—enclose 25c in coin or stamps to cover handling.

AMERICAN FLOOR MACHINES

| The Ameri 532 So. St. Toledo 3, Enclose "Opportun I can start | ican Floor Clair St. Ohio d find 25c sities in Flo my own fl | in stamps of or Surfacing | Machine Co. or coin for booklet g", telling me how g business. |
|--|---|------------------------------|---|
| | | | • |
| Street | | | |
| City | | State | |

OCTOBER 1952'65







The MAN who is a MOTHER to Millions!

Few mothers ever tried harder to make their children happier and more contented than this particular man who plays such an important part in your life.

He is the maker of the good things America enjoys. He is the manufacturer whose whole livelihood depends upon your liking, wanting and buying what he has to sell.

He, and thousands like him, all try to outdo each other in competition for your favor!

They make endless effort to bring you better products, new ideas, finer quality, lower prices, smarter styles, and greater conveniences!

They take pride in what they make-pride in their names, and in their family of users-you the consumer! For you, the buyer, are the boss in this land of brands!

Remember the brands you see advertised in this magazine—and buy where you see them featured.

Brand Names Toundation

A NON-PROFIT EDUCATIONAL FOUNDATION 37 WEST 57 STREET, NEW YORK 19, N. Y.



Surplus items—hundreds of them for home, shop, factory, furm und outdoor use. New items, sed items, reconditioned items—1 at tremendous savings—all for quick sale,

PAGE AFTER PAGE OF VALUES This big catalog shows page after page of amazing money saving values. Write for your copy today. Send 10c to cover postage, mailing, etc, Write today! SEND TODAY FOR YOUR COPY

STARK'S

Dept. P5-10 CHICAGO S. ILL.

uptured



TRY THIS!...

If you can obtain relief by holding back your rupture or ruptures in this manner-I CAN HELP YOU! Write today for my valuable FREE information which is based on 23 years of practical experience.

FRED B. MILLER, Migr. Dept. P. Hagerstown, Maryland.

EX Industry needs manufacturers on for big production of Lump and t Goods and Novelties in Plastes ation. Experience unnecessary, 1/2c regular 10c store sellers, Rubber n for speed production. Small inves

Interest and benefit you.
PLASTEX INDUSTRIES, Dept. 2, 3400 Third Ave., New York 56, N.

DRAIN WASH TUBS, CELLARS, CISTERNS

BRIGHT-FILL TANKS - DRAW WELL WATER
RRIGHT-FILL TANKS - DRAW WELL WATER
Pumps 2800 GPH 420 GPH at 75' High or 1600
GPH from 55' well. Sturdy, Rustpool Alloy Metal, Six
(Blade Impeller, Uses any 1/8 to 1/2 H.P. Motor 'Will
Onci leak or clog. Fits any garden hose. Immediate
US STATE - DRAW MEDIAN - DRAW - DRAW

MOORE MANUFACTURING CO.

Buy DIAMONDS at Wholesale Prices

Benefit from Loan foreclosures and Estate liquidations. Values from \$50 \$10.000.00. Write Dept B.

CITIZEN'S Diamond Brokers

195 Mitchell St. Atlanta, Ga.

Save up to 50% Catalog Fet 1914



UNI-COATED*!

Brand New, top quality glasses. All have precialon ground optics, durable lightweight bodies. Moisture and dust proofed. Achromatic! **Featherweight!**

16x50 569.50 27 Ounces

The ultimate in a fine bluccu-lar. Tremendous power. Feath-erweight (weighs only 27 ounces, Preclaion made in every delail, UNI-COATED*-providing sharper, brighter images, individual focus, Oh-jectivo lens is 50mm (2 Inches) across.

Same Model CENTER FOCUS with individ, focus right eye. 12x50-\$59.50

UNITED BINOCULAR BARGAINS!



| 6x30 16 oz. Economy 41/2"x6" | \$27.95 |
|--|------------|
| 7x35 All round use, 5"x61/4" | 42.95 |
| 7x35 Center Focus 5"x61/2" | 46 95 |
| 7x35 German World's Lightest 14 oz! | |
| Center Focus | 57.50 |
| 7x50 Brilliant-61/4"x71/4" | 36.00 |
| 7x50 Center Focus 634"x71/4" | 39.50 |
| 8x30 Well-Balanced | 31.50 |
| 8x30 Center Focus-41/2"x51/2" | 37.50 |
| | |
| 8x40 More Power-51/2"x634" | 39.50 |
| 8x40 More Power-51/2"x63/4" | 39.50 |
| 8x40 Streamlined 24 oz! | |
| 10x30 1814 ozl | 39.50 |
| 20x56 German 91/2"x6"-27 oz! Center Fe | ocus 99,50 |

6X-10X POCKET ALL 3 ARE UNI-COATED*1, precision PRISM Binoculars. Superb craftsman-ship. Superlor in every detail.



10x They are News \$24.95
WEIGHS 71/2 OZ.1 Palm sized.
Pull 10 Power. Color corrected.
Achromatic tens. Perfect balance.
Another UNITED first in revolutionury binocular developments.

6x DUO-TONE \$16.95
Illustrated. Weighs only 4½ oz.i
Provide an excellent field of 7x ALL CHROME \$19.95

Sturdy. Precision made. Sharp, clear vision! Sale priced.

SIX TELESCOPES IN ONE!

■ \$30.75

American made Woltenask LeisPOWER

30x, 30 and 40x, etc. Turn hover loss to a cope. Instant foculate at 18x, a cope. In the cope. In the

Weighs Only 20 POWER



2½ Times stranger than shockless used by the U.S. Armed Forcest U.S. Armed Forcest Control of the State State Stat

UNI-COATED* Assuring users that applications of magnesium fluoride have been applied to the interior sides of the VITAL front and rear ACHROMATICS assuring users brighter, clourer, sharper images than

FROM 3 CONTINENTS come UNITED'S "BEST-BY-TEST" binoculars and telescopes. Above are from America, Germany and where not indicated from American influenced Japan where skilled German optical craftamen tutored local optical workmen in advanced optical techniques. It explains why the quality is so high and the price so low.

UNITED Seal of Quality etched into your UNITED Binocular is proof they are BEST-BY. TEST. It is your GUARANTEE OF SATISFACTION. INSIST upon it!

30 DAY FREE TRIAL

If not fully satisfied return for full refund. Cash orders rushed postpaid on C.O.D.'s include S.2.00 deposit, Add Federal Tax, Prices on all of aborbinoculars include handsome genuine leather case and straps, SAVE by buying direct from UNITED "America" outstanding Bluccular Retailer,"

CATALOG

FREE! 36 page-3 color binocular catalog listing over 60 different style bluoculars, the Best By Test from 3 continents! UNITED has served over 100,000 Sportsmen. Buy UNITED and SAVE.

UNITED BINOCULAR CO.
United Bidg., 9043 S. Western Ave., Dept. ARF-7416, Chicago 20
Display Sales Roome open 9:00-3:00 Mon. htm Fri. DEALERS WANTED

OCTOBER 1952 67



1914 REGAL Colonial Coupe \$3.95

Fortured Jaccinating story of this celebrated of the communication of th

1904 OLDSMORILE - SL 95

CHOICE OF 17 MODELS
\$1,95 TO \$3,95
OTHER Models not shown: Moowell
\$3,00. Buck \$2,50. 1940 - 17* Ford
\$2,50. Rembler \$2,50. 1940 - 17* Ford
\$2,50. Rembler \$2,50. 1907 - 18* Ford
\$2,50. Franklin \$2,50. Int. Horvester
\$2,95. Pockard \$2,50. Stutz Bearcat
\$3,95. Columbin \$2,50. Mercer Raceabout \$3,95. Codillar \$2,50. "Old 16"
Learnable \$2,50. "Old 16" FREE! Write for a Copy of Our 4-Color Folder!

CHOICE OF 17 MODELS

hudson miniatures "Originators of Antique Autos in Miniature SCRANTON HOBBY CENTER, Dept. 28, Scranton 10, Pa.

Take it easy H.P. SNOW BLOWER with this ...



12 months a year! Fully guaranteed! Compare with others at \$50 to \$75 more. Write for folder 31. CEORGE CARDEN TOOL DIV nunity Industries Assn. Sullivan . Illinois



\$4.50 to \$42.50

Help grow good, abundant, luxurious hair again with "APPLETONE
HAIR AND SCALP OINTMENT." This famous hair specialists' formula is for falling hair, loss of hair, bald spots, dandruff, alopecia, tetter, itchy and irritated scalp and all exischy and Irritated scalp and all ex-ternally caused hair and scalp affec-tions. Apply it in privacy of your home, at your own convenient time and least expense. Complete hair growing kir, including postage, tox and mailing \$5.00. Or generous size jor of hair ointment \$2.00. Send cash with order or C.O.D. Pay postman.

Appletone Drugs Laboratories JOS. CAMPAU DETROIT 12, MICH. Druggists, Write for Agency







DAN LURIE

FAMOUS DAN LURIE

50 lb. set....\$ 8.48 | 150 lb. set....\$20.48 100 lb. set.... 13.98 | 200 lb. set.... 25.98 Order by Mail; 50% with order, bal, C.O.D. Extra wts. 13c per ib., F.O.B. plant

DAN LURIE BARBELL CO. 1701-S10 Pitkin Ave., Dept. 270-K, Brooklyn, N. Y.

AUTOMATIC CLUTCHES

rite for

Get smooth pickup for your pomower, motor scooter or garden vent stalling engine, cut belt wear, per-no-load idling. Easily installed on ½, ¾" gas engine shafts. Factory-tested. dealer or write for folder. PS 10



V-PLEX CLUTCH DIVISION — Hagerstown, Indiana

WARN HUB CAP MAKES

\$20.00 v. S., Cana

Ends front wheel drag on Dodge, Chew. Willys vehicles. Army \$\frac{1}{2}\text{ on Dodge}\$, Chew. Parker front of the Smites for either the war. Front wheels come out of geal 4-wheel drive handles, part wheels come out of geal 4-wheel drive handles, part wheels come out of geal 4-wheel drive handles, part wheels come out of geal 4-wheel drive handles, part wheels the control of t WARN MEG. CO.

ROCK? -- OR \$25,000 JADE NUGGET!

WOULD YOU KNOW THE DIFFEREN

Some speciple all by a fortune every day! Do YOU' By picking up "o'getain" (sock..., or maybe lest polithing one; you whell swore may be changed GEM KRAFT epportunities are unlimited in oprevious experience needed. Thousands are "Rook Hounds," is to... House the same of the state of the sta reaches us overnight.

GEM KRAFTERS, Dept. 3A 1717 Westwood Blvd., Los Angeles 24, Celli



POW

THE VENTRILOQUIST'S DUMMY

only You and your kids will speed to the search of the sea

NOVELTY MART - DEPT. PS-10 EAST 8th STREET NEW YORK 3. N. Y.

AMAZING HEAT İNVENTION

\$14.75 for Stoves BIGCASH DISCOUNT, SLIPS \$14.75 for Stoves HITO ANY COAL STOVE, RANGE OR FURNACE TO THE COAL STOVE, RANGE OR FURNACE OR FURNAC



This special deek of playing cards with secret code on back of each card tells secret code on back of each card tells down. Easy directions expiain code and how to do many kinds of "Magic" games, such as poler, bridge, etc. Only \$2.98. Get a deek today, SEXD NO posiman on arrival only \$2.38. Buls posinger, Address MOLLISTER-WHITE CO., Dept. 451.M 3018 W. Vam Buren St. Chicago 12, Illinois

IIIUSTRATED COMIC BOOKLETS POCKET SIZE!

THEY'RE TERRIFIC! PACKED WITH RARE CARTOONS and GOOD CLEAR ILLUSTRATIONS AS YOU LIKE IT. RICH IN FUN and HUMOR. 20 BOOKLETS ALL DIFFERENT, SENT PREPAID FOR \$1

IN PLAIN SEALED WRAPPER, NO C.O.D.S. NATIONAL, Dept. 478, BOX 5-STA. E, TOLEDO 9, OHIO

Sensational Device Tests Eyes



SAVE up to \$15.00 on Glasses! Big news to the millions of Spectacle Wearers and Prospects. Means Freedom from Outrageous Prices. Sold on Money-back Guarantee. MAKE BIG MONEY OUICK-FREE SAMPLE KIT!

Show it to friends and others. Let them use it Free and watch their amazement over this Self Testing system. Here is a great new opportunity in a tremendous new field of unlimited possibilities. Spare or full time. No experience needed. Write for Free sample kit. C. G. Optical Co., Dept. A-144, 20 E. Delaware Pl., Chicago 11, III.

WHY PUT **UP WITH** THIS





WHEN YOU

Thermostat automatically cranks up unattended engine whenever it needs warming. Engine actually runs: thus warming Itself evenly in the natural way (from the inside, out). Uses its own selfgenerated heat.

WORLD FAMOUS

Redi-Warm

AUTOMATIC ENGINE TENDER

ADAPTABLE TO ALL MAKES OF CARS AND TRUCKS

At last the luxury of knowing your car will start as easily on a sub-zero morning as it will on a summer day. With a Redi-Warm Automatic Engine Tender in your car, it makes no difference where you park - how long you park. No plug-ins - no smudge pots no spark boosters. Just touch your starter, and you're off in a ilffy.

HELPS PROTECT 10 VITAL POINTS

- 1. Keeps motor block warm
- 2. Keeps lubricating oil warm and fluid
- 3. Keeps starting motor warm
- 4. Extends life of battery! Keeps It charged!
- 5. Keeps transmission grease warm
- 6. Keeps generator in better condition
- Keeps janition points from corroding
- 8. Rewarms car interior
- 9. Keeps windshield clear of frost
- 10. Keeps windshield wipers from freezing tight

WRITE FOR FREE BOOKLET

- Keeps engine always at starting temperature re-
- gardless of weather. Car cannot be started while Redi-Warm is set for operation; thief-proof — fool-proof — extends
- Saves wear on engine; saves gas ordinarily used
- Saves time saves temper eliminates costly
 - towing charges. Pays for itself over and over.

RETAIL PRICE \$24.95

Order Through Your Dealer or Order Direct CRAY-LINCOLN ENG. & MFG. CO.

NO. WALPOLE, N. H.



AMAZING GENERAL **BLOCK MACHINE** CAPACITY 1000 BLOCKS PER DAY only \$218 LOJ MOTOR

ol. Cinder and conused for homes, fac

PEAK BUILDING DEMAND !

Oenerof Block Machine is omazingly ctical, feelproof. Simple to operate oors or outdoors, Rugged oil steel con-cition. Vibrater mounted in sooled bell irings. Produces up to 1,000 blocks par y Superior 3 Core Type that meets all building code requirements. Con product 4 x 8 x 16, 8 x 8 x 16, 12 x 8 x 16 blocks by Experts

GENERAL ENGINES CO. DEPT. S-102 . 307 HUNTER ST. . GLOUCESTER, N. J.

Includes floor plan for 6 beautiful, lows, Shows ways to save money.
How to lay blocks, lay out building lines, mix concrete, build steps, porches and concrete floors. Mail coupon at once with \$1.

SAVE MONEY · SAVE FUEL · BE WARMER

OF GENUINE

Du Pont CELLULOSE ACETATE

2WODNIW

 CLEAR AS GLASS Na cloudy vinyl plastic effect-but as transparent as the windows it covers. INSTALL IN

for D

MINUTES . . . FROM INSIDE
Scissors and Scotch tape are all you need. No climbing ladders for outside installation! No marring of side installation! No marring of window sills with tacks. Simply tape . . . as easy as mending a page! PERMITS AIRING OF ROOMS

Just lift aff tape when open ... windaw is closed.

100% AIRTIGHT — Used by the U.S. Gav't. Fit any windaw. Rall size 36" x 288". Sheets easily toped tagether to caver winder windaws. Campletely water-proof . . . Instructions furnished. They'll pay for them-

selves many times over in fuel savings alone. Fill in and mail the coupon

TODAY SEND NO

MONEY! Pay Postman YOUR MONEY BACK IN FULL IF RETURN-ED IN 10 DAYS

T. C. TOR. 2113 Believe St.
Phia. 40, Pa., Dest. PS1
GENTLEMEN: Please ship memediately () rols (ca. roll 36" x
288")—at S6. per roll of TOR
Plastic Storm Windows . . ca. roll
enough for five average Size storm
windows — with instructions.

() I wiif pay postman \$ plus few cents postal collection fee. () Am enclosing payment here-with (saving collection cost)

1

Name

CAR OWNERS!



First 12 Pages Alone of New Auto Book Can SAVE You Over \$86.00!

Popular Science Experts Help Keep Your Car's Value Up - Repair Costs Down!

Now ready! "HOW TO TAKE CARE OF YOUR CAR"-big, new "show-how" manual that helps you save hundreds of dollars repairing your own car regardless of make or model! Simple "do-it-yourself" instructions help you prevent 95% of costly car break-downs! Make many necessary repairs and adjustments at no cost or for just a few pennies! Save on gas, oil, tires, paint jobs, motor and body repairs everything fully illustrated in 5 colors!

SAVE hundreds improving your car's performance and appearance, modernizing your garage, and making scores of other improvements!

EXTRA! Save untold troubles and disappointments when buying a used car. Buyer's Guide on Pp. 168-172 makes it practically impossible to get stuck with a "lemon."

256 BIG PAGES! 750 PICTURES! 851 NEW IDEAS!

ONLY

SEND NO MONEY! All you do is merely detach Coupon below and mail in now. Enjoy week's FREE trial! Balance of edition going fast; we may never again be able to offer book at low bargain price of \$2.49! Paste Coupon to 2-cent postcardmail TODAY!

| POPULAR | SCIENCE, | DEPT. 1052 |
|---------|----------|-------------------|
| | | |

333 Fourth Ave., N. Y. 10, N. Y. Please send 'HOW TO TAKE CARE OF YOUR CAR' in edition checked below, I will pay postman \$2.49 plus postal fees. If not satisfied, I may return book within 7 days for refund of purchase price.

| De | Luxe | Edition | only | 50c | extra. |
|----|------|---------|------|-----|--------|
| | | | | | |

| Address | |
|--------------------------------------|---|
| | ZoneState |
| Check here if you all shipping costs | remit now. We will pay s. Same return privilege. |

Fistula Is Real Threat

FREE BOOK-Explains Other Related Ailments



40-page FREE BOOK-tells facts about Fistula. Rectal Abscess, Piles and other rectal and colon dis-orders; also related ailments and latest corrective treatments. Thornton & Minor Hospital, Suite 1049, 911 E. Linwood, Kansas City 3, Mo.

Build your own JET ENGINE! Order these plans today



1. JET PROPELLED BICYCLE. Assemblyour own. Photo and instructions \$1.00 a. HOW TO MAKE EXPERIMENTAL JE ENGINES, Seven sheets drawings with in 2. HOW TO MAKE EXPERIMENTAL JET ENGINES, Seven sheets drawings with in-formation and instructions \$2.95. 3. BOTH OF ABOVE in one order \$3.75. SEND NO MONEY. Order both at once \$3.75 (-0.D.) in USA plus e.o.d. postage. Send check or Money Order and we pay post-age. Get other information too. Rush Order.

J. HOUSTON MAUPIN, Dept. 66, Tipp City, Ohio

ELECTRIC SHEAR SHARPENER Over 85.000 Sold—It Must Be Good



Genuine Carborundum wheel ideal for ahop or home use. Send remittance with order and shipment will be made at once, prepaid to your door, complete with electrical goods catalogue.

WILLIAM MARVY COMPANY, Dept. 80

AMAZING NEW CHEMICAL MAKES



GI A PARTI 801 A PALENT Leaks the supersons theme plainty or so the parties of th

Ball-Bearing SPEED



JUVENILE WHEELS IN beari

Lug Base, Semi-Pneumatic tire x 1.75. 3.65 10 x 2.00. 6.10 x 2.8W 3.45 10 x 2.75. 5.15 x 2.00. 4.00 12 x 2.00. 8.90 x 2.00. 5.20 12 x 3.00. 9.20 x 2.00. 5.40 16 x 4.00. 15.15

JIM BROWN TOY COMPANY AKRON 10, OHIO

GET THE WORLD'S LEADING TV & RADIO CATALOG



ALLIED BUYING GUIDE

Save on Everything in TV & Radio!

Everything for Experimenters, **Builders, Amateurs, Service**men, Engineers and Soundmen

Get the big 236-page 1953 ALLIED Catalog featuring the world's largest selections of latest top-quality electronic equipment at lowest, moneysaving prices. See the newest in TV, home radios, Amateur Equipment, Hi-Fidelity sound, P.A. systems, recorders, test instruments, builders' kitsplus thousands of parts. tubes, tools and books. Get more for your money from the World's Largest Radio Supply House. Send today for your FREE 1953 ALLIED Catalog!



FREE CATALOG

SEND FOR IT TODAY

ALLIED RADIO

ALLIED RADIO CORP., Dept. 7-K-2

833 W. Jackson Blvd., Chicago 7, Illinois □ Rush FREE 1953 ALLIED 236-Page Catalog

Name Zone_

State

Get into ...



Make \$20 to \$30 a day by our MAGIC MAIL PLAN . . . get orders and cash from your mailman!

Here's the newest and most fasci-nating of all home-operated busi-nesses. For the first time, a simplified machine brings the fabulous profits of Plastic Sealing and Plastic Laminating within the reach of the small operator. Can be

operated in a corner of the kitchen, basement, or garage. And any man or woman, regardless of age, edu-cation, or experience—can learn this Interesting work in a few minutes of reading—can turn out professional jobs after one hour's practice.

TWO EXCITING FIELDS FOR BIG PROFITS

No house-to-house canvassing. No face-No house-to-house canvassing. No face-to-face selling. We not only supply the equipment you need for the work, but also show you exactly how to cash in big daily profits from two big demand fields.

A FORTUNE IN PLASTIC SEALING

Millions of people want to protect valuable cards, photographs, documents and papers cards, photographs, documents and papers against wear, soil, and damage. By our MAGIC MAIL Plan you get this business through the mails. Open envelopes and take out money and orders. Details of this plan will amaze you. It will be sent free. Just mail coupon.

ENORMOUS PROFITS IN LAMINATING

tions for making these

artistic novelties sent free.

Thousands of **Beautiful Art Creations**

No one yet has been able to list the thousands of gorgeous articles that can be made by Laminating as explained in our Free Information. Just a few are COSTUME JEWELRY—CIGARETYE BOXES-JEWEL CASES-GLOVE AND HANDKERCHIEF BOXES-CUFF LINKS-NOVELTY BUTTONS CUFF LINKS NOVELTY BUTTONS
TRAY CANDLESTICKS COASTERS CLOCK CASES LAMP BASES
PICTURE FRAMES BOOK ENDSPAPER KNIVES KEY CHAIN
CHARMS CHECKERS CHESSMEN
ADVERTISING SIGNS NAMELATES BOOKMARKS BELT CKLES-TIE RACKS-KEEP-SAKES OF ALL KINDS.

The opportunities in Plastic Laminating are so big that space here does not permit even skimming the surface. To get any idea FREE at all of the size of these mar-kets and your place in this sensational business you must self how easy it is to do the work—how you can put plastic sheets into your

you can put plastic sheets into your machine and take out a fortune—how money and orders come to you in the mail more of your creations—how you can start with one machine and build up a big production plant with other sking the word was a start with one machine and build up a big production plant with other sking the word was a start with one machine and build up a big production plant with other words. The word was a start with the word was a start was a start with the word was a start was

you can achieve indepen-dence without study or experience.



Never before has such an opportunity been offered the small, however, opportunity to gain complete personal independence in a big money more an experience of the properture o Never before has such an opportunity been offered

WARNER ELECTRIC CO., 1512 Jarvis Dept. L-9-P, Chicago 26, Illinois

WARNER ELECTRIC CO. Dept. L-9-P 1512 Jarvis, Chicago 26, Illinois

Rush complete information with illustrations showing the things I can make and the more Rush complete information with illustrations showing the things. I can make and the more than 100 to 10

NAME

ADDRESS. CITY.

ZONE_

\$5-\$10-and \$20 BILLS COME TO YOU IN THE MAIL

By our MAGIC MAIL Pien you sit at home send out mail, end get back money and nrders. Additional profits in applying local people with lifetime protectinu fur SNAPSHOTS - IDENTIFICATION CARDS - DISCHARGE PAPERS -DRIVERS' LICENSES - SOCIAL SECURITY CARDS—VOTERS REG. CARDS—MENUS—BIRTH CERTI-FICATES—CREDIT CARDS—BIRTH AND WEDDING ANNOUNCE-MENTS - RAILROAD PASSES IMPORTANT DOCUMENTS OF ALL KINDS.

Lifetime protec-tion, Sea how lam-inating pritacts against wear, soil-ing, and moisture damage with its smooth, flexible, # 01 =

smooth, flexibla, plastic everying on each side. LifeE in IMB PROTECTION useded for valus sentimental objects of all kinds — epricelass whisp of hair can ba iamin Think of the countiess thousands of items for your Laminating Press.

STATE

Classified Ads only 80c per word per insertion. payable in advance. Minimum ad 10 words. To be included in December issue, copy should be in our office by October 23. No cancellations accepted after October 15.

CLASSIFIED OPPORTUNITIFS

AUTOMOBILES & MIDGET CARS

"HOW to buy speed equipment without loney." No selling. Information free. (ewhouse Automotive Industries, Los

SAVE—California Custom Accessories headquarters. Buy direct from original designers, Chrome dash pantes locations and the same special control of the same special control

1632 EDITION It's new It's different feet world's largest Auto Accessory & Parts Catalog and save money 100 pages, Coccessories, It's Speed Equipment, Rebuilt Engines, all parts and accessories for all cars and trucks. We have that Hard-To-Completely likerated, Seed 500 (retund-able), J. C. Whitney, 1919-EA Archer, Chiesgo 16.

BUY racing heads, dual manifolds, Hot coils, etc., without money, Information free, Newhouse Automotive Industries, Los

Angeles 22.

NON-Profit organization supplies automobile literature—old. new foreign. Glossy photos, service manuals, data books, engineering papers; free motor magazines. Contact auto "nuts" everywhere. Write today; get on free mailing list. Auto Maniacs, inc., Stockbridge, Michigan.

MAKE your own Polyester-Fibergias Auto body, Catalog 10c. Gem-O'-Lite, Box 686P, North Hollywood, Calif.

CROSLEY parts hard to find? We get em for you. Tires recapped. Club bulletin reveals owner experiences, opinions. Eye-catching windshield decal, identification card, etc. Write: Croaley Car Owners Club, 304 North Popiar, Charlotte, N. Car.

SPEED equipment from the World's largest firm, 25c for huge catalogue, Newhouse Automotive Industries, Los Angeles 22.

"HOW To Buy A Used Car." Over 100 easy-to-perform tests in one Book, A complete Guide. Only \$1.00. M. Kaminsky, Box 570-S. Mt. Vernon, New York. Satisfaction Guaranteed.

AUTO SUPPLIES &

1953 EDITION, 11's New 11's Different Cet world's largest and of concessory & Over 50,000 (lems, including Hollywood Accessories, Hi-Speed Equipment, Rebuilt Engines, all parts and accessories to relations of the Cet of

NEW and used guaranteed parts for civilian and Army cars and trucks. Large-est stock in America Mail orders. Ploner Auto & Truck Parts Company, 788 W. 13th Avenue, Denver. Colorado.

BRUSH Plating Outfits connect to a battery. No tanks or shop required Free particulars. Gunmetal Co., Avc. K. Decatur, Illinois.

"SPEED, Custom, Racing Equipment"—
Wholesaie, Retail! "Souping Manual"—
Cataiog 25c, (Circular Free). Almquist
Manufacturing, Milford 44Z, Pennsylvania. Manufacturing, Muliora 442, Pennsyvania,
LAGHAPELLE'S Treatment (Patented.)
For \$1,00, puts babbitt-type bearings on
\$120-D Waint Dr. Los Angeles I, Calif.
For Agent distribution contact, Dillon,
For Agent distribution contact, Dillon,
tribution, Maker, Box 3, Station C, Hamliton, Ontario. Cuban distribution, Luis
Leaguirre, San Carlos 178, Clentuegos. SPEED Equipment Catalog offers faster acceleration, extra power for all makes of cars. New 1952 Catalog shows world's best "Souping" accessories. Speed tables. Send 50c (refundable with 1st order). Bell Auto Parts, 3633 Gage. Bell 1, Calif. HI-Compression Heads \$18.95 up. Most Cars. State Model. Auto Parts Service, West Saiem 3. Ohlo.

BE Independent, save money, Grind crankshafts without disassembling engine. New hand operated tool \$3.75. Literature, L. D. McGee, 719 Cascade, Wenatchee, Wash. "120 DIFFERENT Ways To Increase Gasoline Mileage" \$1.00, Holloway, Box 225. Bijou, California.

225. DIOU. CRIMONIA.

GM71 Discarded injector parts wanted,
Hogen, 7120 Carnegie, Cleveland, Ohio.

INOREASE! Gasoline mileage Three to
Pive more miles per gailon, Guaranteed
Gasoline Vaporizer, also Increases Power,
Easier starting, \$3.50, Turb-O-Vane, StockLoc Calif

ILLUMINATE your powerglide or dyna-flow dial, information free. Gaiser, Box 25B, Kokomo, Indiana,

SEND for Free Life Membership Card, Economy Methods, "Water Burners of America." La Verne, California.

CARBURETOR Too Rich makes motorist too poor. New invention saves gas "Vacumating." For free particulars, sample offer, write Vacumatic, Dept. 1948, Wauwatosa, Wisconsin.

"HELL'S Belis" in your automobile attract attention! Provoke laughter, amazement. Free literature, "Winco's", Box 9525, Dailas, Texas,

LIQUI-Moly. For quick delivery Alrmail your order. One-haif pint can \$1.15 Post-paid. P. L. Howland, 130 Collier, Mulvane, Kansas.

UNIVERSAL Top Oller—supplies vital upper cylinders your favorite tune-up oil. Protects your engine, new pep and power, \$6.95 complete. ppd. M-F Auto Accessories, Dept. P. 5232 Commercio Way, Woodland Hills, California.

CHEVROLET Owners: Stop tappet noise with Kaye Tappet Sliencers, Quality product. Easy to install, Money back guarantee. Complete set \$5.95 Postpaid, Kaye Products: 1321C So. Layton Bivd., Milwaukee 15, Wisconsin.

HYDRAULIC jack repair kits. Repair your own. Send for prices. Jack Parts Company. 2000A South Claiborne. New Orleans, La.

AMAZING new patented product re-stores compression, reduces oil burning, adds new life to engine. Motaloy actually adds new life to engine, motaloy acusary metal plates worn pistons, rings, vaives, No tools needed, Safe, economical, Guar-anteed 200.000 miles! Details Free! Garden State Sales, Inc., 201 E, 5th Street, Plain-field 6, New Jersey.

SIRENS, Air Horns! Free accessory cat-log; McCanna, 200-PS East 21st, New

York 10.

NEVER Change Your Oil! Full details free. Thousands of users. You'll be amazed! Dept. TH. Henderize, Inc., 5887 Freeport Blvd., Sacramento, California. AUTOMOTIVE Tool Salesmen get our catalog, Popular tools for body shop, giass, trim mechanics. Douglass Tools, 5251 Pattison, St. Louis 10, Mo.

AUTO TRAILERS

BUILD your own trailer! Plans for all kinds, Illustrated catalog 10c, Jim Dandy, 125-S. Wausau, Wisconsin,

MOTORCYCLES, BICYCLES AND SUPPLIES

"BUZZZZ" Magazine, Describes, Illustrates Motorcycling Completely. \$2.00 year. 20c copy. 5424-B Sawyer, Chicago 25.

RECONDITIONED motorcycles and mo-tors. Chromium accessories. Complete stock Indian parts. Exper rebuilding. Past service. Indian Motorcycle Sales. Kansas City 1, Mo.

Kansas City 1, Mo.
FOUR cylinder Henderson motor \$20. 45
Hartey \$10. others as low as \$3. Harley
motorcycle \$20. Four airpine tires \$3.
motorcycle \$20. Four airpine tires \$3.
logue number Fifty, just out listing the
above and hundreds of other bargains in
new and used midget cars. motorscooters.
motors, parts, plans for homebuilders, etc.
motors, parts, plans for homebuilders, etc.
Directory Athems, Ohlo.
Directory Athems, Ohlo.

REBUILT Gasoline Engines. \$17.00 to \$37.00. Caumei Motor Industries, Temper-ance, Michigan.

WHIZZER \$20; Servicycle (good tires) \$20; Motorbike conversion kit \$25; Cushman motorscooter \$25; Harley twin \$25. Rush 25c (35c first class mail) for catalog \$952 listing many other amazing bargains in motors, midget cars, motorscooters, motorbikes, etc. Associated, Box 1784-CS, Totorbikes, etc. ledo. Ohio.

CHAINS for English Bicycles 95c! Guar-anteed. General Products Co., 15 Fark Row, New York 38, New York.

PROPELLERS, pians, supplies, for snow sleighs-air boats, Catalog 20c. Banks-Max-well, Box 3301G. Ft. Worth, Texas,

BATTERIES, GENERATORS, ETC.

EDISON Nickie odoriess storage bat-teries. 12 to 600 ampere hour. Any voltage, Long guarantee. Literature. Hawley Smith Co., Croton Fails 2, New York.

ELECTRICAL SUPPLIES

LAMPS—25c brings bargain parts cata-log containing instructions for electrify-ing oil iamps, vases, etc. Gyro Lamps, 5402B Ciark, Chicago 40.

TELEPHONES—Telephone Wire, Soive communication problems with Army Field Telephones, Anyone can install, operate, Free folder, Loris Sales, Box 1898-A, Sac-ramento, Calif.

FREE—War Surplus Catalog—Bargains Galore. Welders, Motors, Generators, Hy-draulics, Pumps, Kits for assembling your own, other Items. Save. LeJay Company, Minneapolis, Minnesota.

LAMP Supplies — Wholesaie — any amounts. Prompt shipment on all parts for repairing and building lamps. Illustrated catalog 15c. Brown Lamp Co., No. 501. Weilston Sta., St. Louis 12. Missouri.

WELDING, SOLDERING

A.C. Welders, Lowest Prices, Four sizes, Free Literature, Holgerson's Service, Can-ton, Kansas.

ACETYLENE Weiding Outfits new \$49.00; used \$29.00; Arcwelders \$49.50; Eagle Weid-ing, Dept. 42, 5085 Broadway, Chicago 40, Iil.

MACHINERY, TOOL SUPPLIES, ETC.

FREE! Complete catalogs of precision tools for any job. Big stocks—famous brands: Lufkin, Starrett, Brown & Sharpe. Immediate delivery. Wide selection. Write for your copy Joday Mid-City Hardware & Supply Co. Dept. PS. 318 South Hardware to the control of the c

FIRST quality Imported precision measuring tools. Free information and prices. The International Importing Co., P.O. Box 1307, Oroville 3, Calif.

POWER tools, equipment wholesale prices, Free builetin, Homecrafters Coop-erative, Grand Rapids 6, Michigan.

INDEX Heads for the lathe, drill-press, milling machine, etc. Very reasonable. Write for free folder, Long's Index Heads, 2117 East B Street. Torrington, Wyoming.

GIVE Dad screwdriver set for Christmas or birthday. Useful. inexpensive. Postcard brings circular. William A. Hinds. 825 No. Broadway. New Philadelphia. Ohio.

ENGINES, MOTORS, ETC.

WINDING Data issting 225 motors, single and three phase \$1.00. Motor Data, Box 7631, Kansas City 3, Mo.

MOTORS 14 horse \$15.00. 34 \$22.00. 1 \$35.00 A.C. generators 750 watt \$38.50. 3000 watt \$125. Butler, 1885 Milwaukee. Chicago 47.

REBUILT Gasoiine Engines. \$17.00 to \$37.00. Cauffiel Motor Industries, Temper-ance, Michigan,

GEARHEAD Motors 15 H.P. Standard Motors with six output shaft speeds the motor of 1.000 uses. Write for literature. Vine. Hill & Co., Box 35P, Swanton Ohio.

11 BOATS, OUTBOARD MOTORS

FULL size, cut to shape boat patterns, blueprints, 7½-36 feet, Illustrated "Build a Boat" catalog 25c (coln), "How to Build Boats" book, \$1.00, Cleveland Boat Blue-print Co., Dept. A-77, Cleveland 13, Ohio. NEW, used, rebuilt marine motors, Marine conversions, fittings, Free Catalog. Stokes Marlne Supply. Dept. 23. Coldwater, Mich.

OUTBOARD Motor Parts—New—Used for all makes, Send stamp for price quo-tation, listing parts needed. Outboard Mo-tor Mart. Inc., 229D State Street. Boston. Massachusetts.

CURE that leaking boat with Fibergias-Plastic covering Ends caulking and paint-ing Nationally approved process, Easily applied, complete instructions. Industrial Plastics, 3807 Harrison Street, Oakland 11, California.

SAVE 2/3 Cost. Assemble your own boat. We furnish parts, No experience necessary. Rowboats. Cruisers, Illustrated Catalog 25c. Midwest Boat Company, Menomonee Falls 1, Wisconshn.

MARINE conversions for Ford and Jeep engines. Catalog 10c. Lehman Manufac-turing Co., 972A Broad St., Newark 2, N.J. OUTBOARDS—Complete plans all types.
Racing, sporting, fishing, Circular 25c.
E. G. McCrea, Designer, Box 141-E, North
Hatley, P.Q., Canada.

CONVERT Fords and Jeep to 100% ma-rine engines with Osco's world famous Convo-Kits. Deluxe catalogue 25c (coin). Oscomotors, 3627F Lawrence, Philadelphia

BUILD Beautiful Fibergias-Plastic Boats without using molds. New patented meth-od, Write Speedcraft, 2450 Emerson, off Square Lake Road, Pontiac, Michigan, APPLY Polyester-Fiberglas coating to your boat. Permanent protection. Catalog 10c. Gem-O'-Lite, Box 666-O, North Holly-

PLANS: Inboard-outboard runabouts, cruisers, saii. Wood, plywood, welded steel. Advise requirements. John B. Ciark, N.A.. 329 Kenmore, Bay Village, Ohio.

12 BODY-BUILDING COURSES, JIU JITSU & ATHLETIC EQUIPMENT

100 TRICK Knockouts for self defense. 1. 1c each, Lincoin, 529 Main, Evanston

REVOLUTIONARY New Lift Exercisor Stretch-A-Wate Fraction cost barbells, ree booklet, Stretch-A-Wate Co., Sap-ington, (St. Louis, Missouri.) BARBELLS, Dumbbells, Exercise equip-ment, Courses, Free booklet, Good Bar-bell Co., Reading, Penna. ment

FIELD GLASSES, TELESCOPES

REFLECTOR telescope Klts; Aluminized Mirror, Diagonal, Eyepieces, Mounts, Complete Kit. Free Bulletin, Esco. 911 Willow Ave., Hoboken, New Jersey.

WAR Surplus Bargains, Binoculars, Telescopes, Sextants, Millions of Lenses, Prisms, Rettles, Eyepices, Objectives, etc. Mall 10c for Big "Catalog CN." Send \$1.00 for Stock CN-10-piece Lens Kit and Big Instruction Booklet, Edmund Scientific Corp., Barrington, New Jersey.

BINOCULARS. telescopes, microscopes. Our 20th year of leadership in optical values. Bargain catalog free. Brownscope Co.. 24 West 45th St., New York.

POWERFUL astronomical telescopes easily made. Perfect lenses and instruc-tions; 100x 83.00; 100x and 200x 84.00; 100x 200x and 400x 86.00. Full power, clear vision guaranteed. Instructions alone 10c. Suffolk Science Service. Riverhead, N. Y.

"FREE" Catalogue! Thousand war sur-plus optical bargains. Lenses. Prisms. Tele-scopes. Binoculars. etc. Send \$1.00 for 10 Lens. Hobbyist. Set and Project booklet. G. Jaegers. 691 West Merrick Road. Lyn-brook. New York.

TERRIFIC Values, Binoculars, Tele-scopes Microscopes \$3.95 up, Request Free Money saving Catalog, Criterion, Hart-ford, Conn., Dept. S7.

BUILD Your Own Microscope—200 prw-er. Complete Castings. Mounts. Lenses. Screws Instructions—Kit \$41.75. Free Il-lustrations. Esco. 911 Willow Ave.. Ho-boken, New Jersey.

REFLECTING Telescopes, completely assembled, 60X, \$29.75. Guaranteed Observatory clearness. Free Information, Skyscope, 475 Fifth Avenue, New York 17. SAVE: Free 36 page. 3 color binocular catalog. 60 different models. United Binoculars. (A-6516), 9043 S. Western. Chicago 20

SAVE! Save! New Binoculars! Free Catalog, Free Book, "How To Select Binoculars". Write Today! Bushneil's, 43-P40 Green. Pasadena I. Calif.

GENUINE German imported trade stamped binoculars high powered light-weight \$3.69 each. Agents Invited, Jewelry, 1127 Main, Hartford, Conn.

POCKET Surveying Instrument. Free Literature. Write Kivco. 4037 Windsor. Pittsburgh, Pa.

POWERFUL Telescopes easily made. Lenses, erector focusing tube instruc-tions for making 40X, 100X, 200X and 400X telescope \$5.00, Telescopic Camera Co., Manorville 5 New York.

GIANT 100 power astronomical telescope with 8 ft. tripod (10,000 area magnification) Clear Vision full power guaranteed, \$15.00 F. O. B. factory. Suffolk Science Services. Dept. TC. Riverhead, N. Y.

AMAZING prices, New precision binocu-lars, telescopes and laboratory microscopes, French, German and Japanese, Free trial. Folder "Binocular Selecting", catalog free. Prentiss Importers, Mercury Bidg., West Los Angeles, Calif.

MICROSCOPE Saie . . . Zeiss disecting, German Laboratory, Reichert Spencer, Rasmussen-Reece, Amsterdam, New York.

BRAND New Binoculars, 7:50 coated Binoculars with pigakin case \$33.00, 7x3-6 central focus with pigakin case \$42.50. Our own import allows these very low back guirantee. Kern Binoculars, Inc., Dept, OS, 170 Fifth Avenue, New York 10, N Y.

SPORTING GOODS, GUNS, FISHING TACKLE, ARCHERY, TRAPPING

120 PROFUSELY illustrated pages, antique pistois, swords, daggers, armor, etc. 50c. Robert Abeis, PS860 Lexington Ave., New York 21.

SAVE on Gunsmithing, Jap Conversions, Scopes, Loading Tools, Catalog 10c, Cougar Arms Company, 587 Ferris Street, NW, Grand Rapids, Michigan.

5,000 BARGAINS, firearms, binoculars, war relics, catalog 50c, Smith Museum, Runnemede, N. J.

SEND 10c for lists either shotguns, rifles, handguns, ammunition or send 25c for all iists, Frayseth's, Willmar, Minnesota.

FISHERMEN—make your own a with our moids. Free illustrated booklet. Reading Instrument Co., Box 78, Reading. Penna.

AMMUNITION. American-foreign and obsolete. New guns. Dime for list. Central Sports. Delphos 25. Ohio.

HUNTING guns from \$10.00. Kentuckies, Western guns. Coits. Antique-Modern Bar-gain List. 25c. Ed Agramonte. 201 War-burton. Yonkers 2A, N. Y.

OVER 500 guns, modern, obsoiete, List 10c coin, Ed Howe, 26 Main, Coopers Mills, Maine,

DOGS, BIRDS, HAMSTERS, RABBITS & PETS

EARN Up To \$400 Monthly Raising Angora or New Zealand Rabbits, Plenty markets, Particulars free, White's Rabbitry, Newark, Ohio

MAKE Big Money! Raise Chinchilla Rabbits, Cash Markets Supplied, Write Today! Rockhill Ranch, Sellersville 16, Pa. RAISE Mink: Free bookiet, pen, pians, inside "secrets" feed care. Mink are money makers. Investigate today. Law-rence Molgard. Brigham City 13, Utah.

RAISE Guinea Pigs. Profitable Occupa-tion, Free bookiet, Taylors, B426B, Hape-ville, Georgia. YOUNG Parrots—make fine taikers, Herb Milier, 1911-N, Lubbock, Texas, PANDA hamsters, the spotted kind, pets and breeders also Syrian Goiden, Fred Battersby, 430 N Fourth Street, Vineland.

NATURALIST'S Catalog 10c. Chameleon 55c. Trio hamsters \$4.75. 35 Mexican jump-ing beans \$1.00. 200 Mealworms \$1.00. Quivira Specialties, Topeka 10. Kansas. TEACH your cat to use the bathroom toilet. Booklet of simple instructions. 25c. Fur, Fin & Feathers Pet Shop, 222B High-way 101. Encluitas, Calif.

SALE Tame Red Squirreis, Raccoons, Dewey H. Balch, Castleton, Vermont.

WOOD-Ducks Orders filled until Febru-ary twentieth! Eggs in season, Bernard Ohnmacht, 2307 Butler, Lafayette, Ind. GOLDEN Hamsters. Pedigree Stock Breeders, Laboratory or Pet Stock Shipped express Anywhere, Price list free, Charles E. Bowser, Smoke Run, Pa. Dept, H.

FARMS, OTHER REAL ESTATE

FARM Ranch Opportunities, favorable conditions, Washington, Minnesota, Mon-tana, Idaho, Oregon, North Dakota, Liter-ature, farm descriptions, specify which state, J. W. Haw, 120 Northern Pacific Railway, St. Paul, Minnesota.

NEW Strout Catalog Just Out! Farms, Homes, Businesses, 31 States, Coast-to-Coast, bargains gaiore, Mailed Free, Our 53rd year, World's Largest, Strout Realty, 255-ZB 4th Ave., New York 10, N. Y.

CALIFORNIA Ranch Lands. 50c to \$5 acre minimum bid. Farm-ranch-hunt-fish-retire. 10c brings illustrated land cataiog, outline maps. Tax Land Sales, Box 2350BX, Hollywood 26, Calif.

TOURIST Courts, Motels, Resorts, Farms, ranches, Income property, homes, stores, coast to coast service. Parkway Realtors, Silver City, New Mexico.

FLORIDA. New Lake County develop-ment advining Ocala National Forest. Best fishing, hunting Safe from bombs. Nice homesites \$245 at \$10 monthly. Fold-er free, Winfree Vernor, DeLand, Florida.

TREES, SHRUBS, ROOTS, HERBS

FRUIT Trees! Stark Bro's sensational regular Trees! Stark Bro's sensational regular produce abundant, larger, better apples, peaches, pears, All fruit faster growing, beaches, pears, All fruit faster growing, trees and shrubs, Get giant new Colorphoto Catalos Free, Stark Bro's., Dept. 3003. Louislana, Missouri

1 POULTRY & SUPPLIES

SENSATIONAL Bargain! Assorted heavy chicks \$6.90—100 postpaid! Poslitively no Leghorns! No Cripples! No Cuils! Send check or money order! Prompt shipment! Live delivery! We pay postage! In business over 2s years, Atlas Chick Co., Dept. P.S., St. Louis 3. Mo.

RAISE pheasants on the \$100 week plan. Little capital and space can make you independent. Free details Great Central Game Management System, Columbus 6, Kansas.

22 PROFITABLE OCCUPATIONS

DETECTIVES Earn Big Money, Excellent opportunity, Detective Particulars free, Write, Wagoner, P-125 West 86th. New York 24.

BE independent, be secure, have your own profitable business—sam \$20,00 and support of the profitable business—sam \$20,00 and support of the profitable business at home. No equipment needed, Illustrated course, parts etaches you quickly. Course, parts catalog, wholesale price list—only \$2. Gearon Co., Dept. 200-A10. 27 S. Despialnes, Chicago 6, Ill.

\$40.00 WEEKLY, Made growing mushrooms. Fresh, Dried, Dominion Patent 331.583, free spawn, North American, 169Y Yonge, Toronto, Canada.

WANT A Diesei Job? New Opportunities to increase income. Higher Fay. More Money, We can help you Qualify Tools. Shop method home training, Write today! Diesei. Tractor. Heavy Equipment Division. Interstate Training Service, Dept. 2K. Portland 13, Oregon.

"HOW to Make Money With Home Workshop" describes amazing methods used by hundreds of successful craftsmen. Teils what to make. How to sell workshop output spare time. Write at once for details. Craftsman, 115B10, Worth Street. New York City.

\$10.800 PROFITS! Your own Maliorder Business! No Capital Risk! "Success Plan" (worth \$2) Free! Write today! Treasury. 149 Storer. New Rochelle P-4, New York.

\$5000 FROM half acre growing Ginseng. crop bought, Particulars 10c. Associated Growers, Sperling, Manitoba.

GROW Mushrooms. Cellar, shed, and outdoors. Spare full time, year round, We pay \$3.50 Lb. We paid Babbitt \$4,165 in lew weeks, Free Book, Washington Mushroom Ind., Dept. 101, 2954 Admiral Way, Seattle, Wash.

EXTRA money—Boys-Aduits; Distribute saies literature—orders will foliow. Repeats. Fleming Co. 319 W. T. Waggoner Building. Ft. Worth, Texas.

Buliding. Ft. Worth. Texas.

BUY Wholesale thousands nationally advertised products at big discount. Sent free "The Wholesale Plan." American Buyers' Service. 628-S Linden, Buffalo, N.Y.

FROM Basement To Big Time—In four years I went from basement lathe models to \$12,000.00 gress sates ber year. I could to \$12,000.00 gress sates ber year. I could am offering you, on how to do it, had been available. It covers development, manufacture, sales, finance and business records. Seed \$2.00 today for what cost me \$20,000.00 is learn. Send now to Clay Manufacturing Co. Box 199. Northaled, Minn. Secturing Co., Box 199. Northaled, Minn.

PARAKEETS—\$4000 year from 100 pair. Instruction book. Equipment plans, \$1.50. Cesco, Box 9305, Fort Worth, Texas. SAIL Ho! Be a Merchant Seaman, Enior World Travel, big naw Sand Now the

SAIL Ho! Be a Merchant Seaman, Enjoy World Travel, big pay, Send Now for Free Information, Seaways, Box 1231. Baltimore 3, Maryland.

TYPISTS—Profitable business at home.
Complete copyrighted information, 50c.
Gaunt, 827-T Irving Park, Chicago 13, Ill.
SEVERAL Mailorder Money Making
Homework offers. Address Jenkins, Lucasville, Ohlo.

RAISE Ginseng! Roots bring fortunes. Free Information, Fezler, Patchogue, N. Y. PARAKEETS—Amazing Profits! Easy! Care, breeding instructions 25c, Anderson's, 1321 E. Kaley, Orlando, Florida. FREE Book "505 Odd, Successful Businesses," Work home! Expect "Odd"! Pacific—37C, Oceanside. Calif.

cinc—37C, Oceanside. Calif. YEAR round home business, learn mold-making, piastercasting, painting, Instructions, Rubber Models, Paints, Hobby Shop, 410 So. Detroit, Toledo, Ohio.

BOOKS & MAGAZINES

AMAZING new adult book bargains. Send stamp. Paul Vallon, 63 Perry, New York 14. New York.

MAGAZINES (back dated)—foreign, domestic, arts, Books, booklets, subscriptions, etc. Catalog 10c, (refunded), Cicerone's, 86-22 Northern Bivd., Jackson Heights, N. Y.

ADULT Books—Hiustrated Comic Pookiets. 10 for \$1.00, 24 for \$2.00, Ali Different, Free gift with each \$2.00 order. V. M. Rogers, Dept. PS. Box 14738, Cimarron Station, Los Angeles 18, Calif.

BOOKHUNTERS! All Subjects Send Wants! Jaher Book Service, 620-K East 178 Street. New York 57.

FREE catalog. 400 popular books. Bargain prices. Books Publishing Co., 56 W. 24th. New York 10.

HYPNOTISM Now easy to learn. Photoiliustrated, guaranteed course \$2.00 compiete. Full details free. Power Publishers, 790 Broad, Newark 2. New Jersey,

ATHEIST books, Catalogue free, Truth seeker Co., 38 Park Row, New York 8.

BOOKHUNTERS! Soarce, unusual, miscellaneous books supplied, Atlantic Book Service, 2 Lawrence. Charlestown 29, Mass.

BACK-Date magazines, Specific issues; years, Arkell's, Northridge, California.

WANTED! Loving Care & Sheifspace for Sensational Book Bargains! Free Catalogue! Old Prof's Bookshop, Pontiac 15. Michigan.

ENJOY Inexpensive reading Used books 9-31, 20-32, 23-38. Satisfaction guaranteed. Schollmeyer, Box 48. Brooklyn 25. N.Y. USED pocket novets. 8 for \$1.00. Stampbrings list. Trunkat. Glenshaw 3, Penna. USED Books Supplied, Catalogue Irec. Balliol, Box 85. Station "K." Toronto, Canada.

INTERESTING adult books—noveities illustrated comic bookiets 24—\$1.00, cataiogues 10c. Kogan, 1032PS Church Annex, New York 8.

BOOK Bargains: Particulars, Scnd Stamp. Arkay Box 2052-PS, Los Angeles 53, Calif.

HARD-To-Find Books Supplled, Send wants. Plerce's, Winthrop, Iowa, NATIONAL Geographic Magazines 1888-1952 Any Issue. Periodical Service, Box 465-PS, Wilmington, Delaware,

"THE Man From Mars," 25c. Christian Evidence League, Maiverne, New York. "HOW To Buy A Used Car." See Automobiles-Classified.

24 GAMES & ENTERTAINMENT

"PIXIE Packets" for children 7-14, A different craft kit each month, Yearly subscription \$6.00. Entertaining, educational, excellent gift, Write for free literature. Pixie Packets, Dept. S-4. Ralston.

NOVELTY surprises every month. Pun for ail! Join for \$5.00 per year. Noveityof-the-Month Club, Box 121, Cincinnati

MAGIC TRICKS, PUZZLES, ETC.

MAGICIANS', Gamblers' secrets exposed, Cards. Dice. Punchboards, Slot Machine. Catalog 10c. Book Co., Box 671, St. Louis 1. Mo

LATEST Magic for pocket, parior, stage, Catalogue 500 Tricks, only 10c, Unequalled magic service for 30 years, Douglas Magiciand, Dept, 2, Dailas, Texas,

MAGICIAN'S illustrated catalog and free trick 35c, Terry's Magic Studio, 6606 Duryea Court, Brooklyn 19, New York.

512-PAGE catalogue of 2500 tricks, pocket, parlor, stage, World's Pinest Magic, Send \$2.00 for catalogue (refunded first \$8.00 order), Kanter's, S-1311 Walnut, Philadeiphia 7.

FREE trick and large illustrated catalog —35c, Lerro's Magic, 8111 Fifth Avenue, Brooklyn 9, N. Y.

GUARANTEED Magic tricks! Catalog free, Newton Magic Company, Bonham 8. Texas.

MAGIC Monthly, Year 25c, New 1852 Magic Catalogue, 10c, New, Juke Lists 5c.

MAGIC Monthly Year 25c, New 1952 Magic Catalogue 10c, New Joke Lists 5c, Magic Shop, Minneapolis 2, Minnesota. LATEST Magic, Big lliustrated Catalog 10c, Top Hat, 529K Main, Evanston, Ill.

10c. Top Hat. 529X Main. Evanston, III.
"DUNNINGER'S Tricks"—Not A Catalog! 125 Mystifying Tricks (card. coins, etc.) Easy-to-do. explained. Send \$1.00 Now! Loyal. 4014-L Amindson Avenue, New York 66.

TRICKS, Funmakers, Puzzles, Jumbo Catalog 15c, Andersen's, 6815S Ardmore, Chicago 31.

COIN COLLECTING

OET Profit and Pleasure in collecting old colns. Send 10c for 56-page illustrated coin catalog. You'll be delighted with it. Send for it now. B. Max Mehl. 374 Mehl Building. Fort Worth. Texas. Largest rare coin establishment in U. S. Established 51 years.

SET nine Japanese invasion notes for U. S. \$2.00. Illustrated coin catalogue 25c. Shuitz, Salt Lake 10. Utah.

Shuitz, Sait Lake 10. Utah.

FREE: Foreign coin, banknote and Coin
Collectors' Hlustrated Catalog to approval
service applicants, Send 3c postage, Tatham Coin Co.. Springfield-50, Mass.

OLD Money Wanted, Will pay Fifty Dollars for nickel of 1913 with Liberty Head (not Buffalo). We pay cash premium for all rare coins. Send 4c for Large Coin Folder, May mean much profit to you, Mumismatic Co., Dept. 30, Fort Worth, Tex.

OLD Coins Wanted: Highest Prices Paid, Large Iliustrated Buying Catalog, 50c; Selling Price List, 25c Richard Allgire, 713 Holmes, Lima, Ohlo.

FREE! Coin Collector's new magazine and wooden nickel, Lawrence Brothers, Anamosa, Iowa. INDIAN Penny with catalog. 10c. Brunk,

INDIAN Penny with catalog. 10c. Brunk, 3530 Osceola Chicago 34, Illinois. 28 STAMP COLLECTING

FREE! Powerful Magnifying Glass.
Jamestown Stamp, Jamestown 202, N. Y.
FREE Hinstrated Catalog Kennore

FREE—Iliustrated Catalog! Kenmore, Milford C-58, New Hampshire. 200 EXOTIO Japan Stamps—10c! Kenmore, Milford K-58, New Hampshire.

AMAZING Offer: 500 United States stamps—including commemoratives, airmalls, high denominations to \$5.00—Only 15c to Approval Applicants!! Illustrated Bargain Lists free, Mystic Stamp Co., Dept. 55, Camden, New York.

FREE—Complete set of Famous Americans, Flags, Parks and Presidentials to approval buyers. Send 3c for 15 of the above stamps pius full particulars. Triboro Stamp Company, 145 Nassau Street, Dept. 210, New York 28, N. Y.

300 STAMPS For Only 10c! This mammoth value lacludes Airmais, Pictorials; stamps from strange countries cataloguing up to 25c each!! Also approvals. Mystic Stamp Company, Camden 55. New York.

POLAR Bear Triangle; Giant George Washington Six Colored Ecuador, Arctic Triangle, first American commemorative. Corsica, Deviis Island, others, Everything free with approvals, Capital Stamps, Little Rock 10, Ark.

PENNY Approvals—Also advanced material, "Juno", 1267 Tutwiler, Memphis 7, Tennessee.

FREE Stamp Collection:—100 different stamps from Europe, Africa, Asia, Scandinavia, Baikans, etc., 3c to approval applicants, Tatham Stamp Co., Springfield 50. Massachusetts.

1.000 UNIQUE Colorfui attractive mounted stamps 1c-2c each. Rushed. Niagara Stamp Co., Niagara-on-the-Lake 72. Canada.

"HOW To Recognize Rare Stamps."
Free Book Illustrated! Kenmore, Milford
H-58, New Hampshire.

WOW: 203 Ali Different Germany 10c: Zeppelins. Semipostals, Airmalls. High Values. etc. to new customers. Jamestown Stamp. Jamestown 509. New York. U. S. Army & Navy Heroes on Stamps:

U. S. Army & Navy Heroes on Stamps; 10c with United States approvals, Locust, Box 305-A. Harmon-On-Hudson, N. Y.

200 DIFFERENT. including Roosevelt triangle, 5c to approval applicants. S. Avaion Stamp Co.. Springfield, Mass. 333 UNIVERSALLY Different, 25c Penny

333 UNIVERSALLY Different, 25c Penny Approvals, 1000 Different, \$1.00. Seifert. Box 1672, Reading, Penna. FREE Bahawalpur Jubilee set to approval applicants, Lighthouse. Box 1516. Colorado Springs, Colorado.

Colorado Springs, Colorado,

YOURS! Three Liberia Triangles, Seychelles, Mauritius, Aibania, Airmais, Af-

chelles, Mauritius, Albania, Airmalis, Africa, etc. Everything loc with approvais, Rodman, 450 Locust Avenue, Burlington, N. J. 18 VALUE Pictorial Set. Free to ap-

18 VALUE Pictorial Set. Free to approval buyers. Pleasure Stamps, 1865A—52nd, Brooklyn 4, N. Y.

237 DIFFERENT Stamps 25c! Including Stamps 25c. Stamps 25c. Including Early Chanda. Newdomdland, British Colporty Chanda. Newdomdland, British Colporty Chanda. Newdomdland. French Colonies, rartites, unusuais, Every stamp Indian States. Animais. Airmails, French Colonies, rartites, unusuais, Every stamp Bargain Approvais. Money back guarantee. Niagara Stamp Co., Niagara-on-the-Lake 52, Canada.

FREE Scott's International Album. Other big premiums, Full particulars with approvals, Raymax, 68-X Nassau St., New York 38.

50,000 STAMP Grabags 25c each, Anderson, 630a Bingaman, Reading, Pa.

25 ARGENTINE stamps 25c. Cheque or
M.O. Casilia 2861, Correo central, Buenos

FLAG Stamp—Free with hygrade U. S. approvals, Weniggman's, 1933 Patterson, Chicago 13.

ALBUMi Capacity over 1000 stamps! Only 10c! Stampmart, Hartford 1, Conn. 312 MIXED U. S. only 10c to "Gold Nugget" approval applicants! Nothing like them. Kessel's. Folsom, California.

MYSTIC Treasure Mixture 1111 Fascinating world \$1.00 Long Beach Stamp Company, Long Beach New York. PAY Check Gone? Are you paying too

PAY Check Gone? Are you paying too much for approvals? Try our books of 1,000. Priced at Ic and 2c each. Reference appreciated. Roseland Stamp Co., Dept. 9-A, Spring Lake. Michigan. 90 DIFFERENT U. S. 30c with Approvals. Falth. 13391/2 Westminster Ave., Alhambra, Calif.

LOOKING for Bargains? Try our 1c & 2c approvals mounted in books of 1.000. We believe in both quantity and quality. First try will satisfy. Clark, Box 544-U2.

Muskegon, Michigan,

BREAKING Collections, Super Medium advanced approvals, McWhorter, 6440B Union, Chicago 21.

6 IONIAN Island Stamps Free—Approvis, WBPS, Box 758, Wilkes-Barre, Penna. EXTRA Bonus—Your Choice Latest

EXTRA Bonus—Your Choice Latest Scotts Albums: Catalogue and available Scotts Albums: Catalogue and available these worthwhile Bonuses When you buy from our better Foreign approvals. Write today for full particulars sent with trial. Approved selection. Americas' Stamp Service. Riverside 2. Calif.

RARE octagonal stamp, giant triangle gorgeous diamond also mammoth and midget stamps given to foreign approval buyers. Gifts with purchases including Scott's International \$6.00 album, also latest Scott catalogues. Plymouth. Dept. A-3. Bell. California.

300 DIFFERENT United States—\$5.00. Approvals, Utechts, 1143A North Keeler, Chicago 51,

SAN Marino Collection Free—25 Different. Old and New issues, Airmalls, Commemoratives. High Values—absolutely Free with approvals. Viking, 130-PP, Clinton St. Brooklyn, New York.

100 UNITED States Stamps commemorating historical events \$1.00. Frank Jancowski. 3588 Frederick Street. Detroit 11. Michigan.

FINE Approvals. Fast, personal service. What countries do you prefer? I'll send their stamps. Milton Skinner, 438 Locust, Long Beach 12. California.

BIG bag mixed stamps. Enormous quantity, \$1.00. Longacre Shop, 583p Sixth Avenue. New York City 11.

UNIQUE Philippines souvenir sheet #515 5c with approvals, Mitcheli, Box 923J, Portland, Maine.

CANADIAN Collection Free—Includes early Victorian Issues—Jubilees—High Values—Commemoratives—Special Issues—Newfoundiands—Pictorials, etc., etc. to-sether with Philatopic Magazine ail free. See Empire Stamp Company. Dept. FR. Toronto, Canada.

DEALERS Wholesale catalog. Postage 3c. Franksco, 5031 Queensbury, Baltimore. Md.

300 DIFFERENT given free with approvals, Postage 3c, Windsor Stamps, 1435 E, 67th Place, Chicago 37.

PENNY Approvals by country. M. H. Hoerning, 102. Farmington, Ark.

15—1—2c. APPROVALS. Bargains Galore! Cole. 43G Rinewait, Buffalo 21, N. Y.

TEN dandy sets. 10c. Approvals. Fassold, 423a Cameron, St. Louis Co. 15, Mo.

40 DIFFERENT U. S. 10c. Priceilst free. Seidenberg. Appleton 944. Wisconsin, 100 DIFFERENT U. S. 25c, Approvals. Buckeye. Box 53. Mansfield, Ohlo.

GIANT Approvals. Thousands Different at 1 and 2c. Wahl's Stamp Exchange, 7008K Farragut Ave., Chicago 31, III. FREE—"German War Issues", cataloging \$10.82, to approval buyers. Royal Stamp Company, Tamaqua 2, Fa.

Stamp Company. Tamaqua 2. Pa.
1000 FINE Mixed U.S. Stamps 25c.
Wright, 201 Mealey, Hagerstown 2. Md.
ITALY—100 Different 5c with Approvals.
DeRespinis, G.P.O. Box 771M, New York 1.
TRUMAN, Stalin stamps plus wordwide
packet free to approval applicants. Constandard, 15½ Troy Road, Schenectady

TERRIFIC Bargains! Approvals 14c-5c. Gaines. 716-B South Sixteenth, Mattoon, III. US 797 SPA Sheet only 5c to applicants for US Approvals. M. Haycock, 235 86th St., Brocklyn 9, N. Y.

FREE! Rare. Coiorful Spanish Morocco Set (complete), with temptingly-priced approvals. "PSG", 195 Park, Lewiston, Maine.

Maine.

FREE Sample—Interesting informative. Illustrated! National Stamp News, Anderson, South Carolina.

NICARAGUA Sports, Costa Rica Agriculture sets loc with approvals. Seminote Stamps. Box 1138. Corai Gables 34. Fla. APPROVALS ½c up from 33,000 collection. Chur. Box 245. Buffalo 12. New York. OREAT Free Offer-Weird mosquito stamp. thrilling bicycle race, sorgeous orchid, colorful native drummer, gigantic approval buyers. Beil Stamp Service, Dept. W-4. Bell. California.

FREE! Monaco nude set 3. This popular set offered to new approval applicants. M. Moumblow, Box 278, East Northport, New York.

WONDERFUL Offer 7 complete mint sets only 10c with approvals. Reich (S26), 4647 Kenmore, Chicago 40.

59 STAMPS including Ships. Animals. Locomotive, 6c. Ransom, 1333 Pontiac. Ann Arbor. Michigan. FREE 25c worth from first U. S., For-

FREE 25c worth from first U. S.. Forelgn approvais, Stampingrounds, Glastonbury, Conn.

ANGOLA! Beautiful multicolor bird set plus 100 different stamps, 10c to approvai applicants, Sunset, Dept. 695, Box 47. South Gate, California.

WHOLESALE lists—bargain collections, accumulations, singles—mailed for 10c (refundable). Largentiere Company. 6462 33rd Place. Forest Hills 79. New York.

OLD scarce U. S. seconds on approval. Slightly defective, bargain prices. Hearnfeld. Clintonhill Station, Newark 8, N. J.

teid. Cilifonhill Station. Newark 8, N. J.
TRUMAN, MacArthur, Hitler, Mussolimi
Commemoratives; free to "Approval Buyers", William Deems, Ravenswood, W. Va.
MANMOTH Grabbags, Big Variety 25c
each, Monjar Fairmount, Cincinnatil 4, O.
307 ALL Different—Only 15cl Beautiful
collection: Commemoratives. Triangies,
High Values, Bicolored Stamps, etc. Garceton, Calais 418, Maine.

TRIANGLE—Diamond—Midget—Glant—Roosevelt—Hitler—Others. Everything 3c with approvals. Thrifty Company, Silver Spring, Maryland.

EXCITING! | Odd!! "Queer Countries" Packet—3c with approvals! Saxon, Vista. California.

SUPERB Approvals. Stamps ½ to ½ catalog. P. G. Beals, 125 Tremont St., Boston, Mass.

FREE "Stamp Finder." Tells country to which any stamp belongs. 32 pages profusely illustrated, Garcelon, Calais 19. Me. FREE! Obsolete U. S. Occupation set. Request selections finest attractive priced stamps ever offered. Riedeli, Greensburg,

FREE \$1.00 \$2.00 \$4.00 \$5.00 U. S. Requested Approvais. Southern Stamp Co.. Box 70. Miami, Florida.

Penna.

100 DIFFERENT Spain 25c. Penny approvais included, Reed, Box 980. Chicago 90, Illinois.

FIFTY different United States: Commemoratives, Airmails, etc., all for 10c. Ed. Keller, Library 2, Penna.

OPPORTUNITY (OFFECUE DE WITH TIangies, Diamonds Glains, Midreets, Plars, Airmails, and Ralirond Stamps. Also Guiana, Dilbouti, Mongolia, Angola, New Approval applicants, Evden, 58 North Montgomery Street, Valley Stream 1, N.Y. 302 DIFFERENT Zec Approvals. Schmitt, 129 South Jackson, Oreen Bay, Wisconsin, 129 South Jackson, Oreen Bay, Wisconsin, December 1, 1998 Stamps of Street, Plants of Street field, Boston 8, Mass.

SPANISH mint airmails \$10.00 Scott value for \$1.00. Abysinia 20 different \$1.00. Spain 30 complete mint sets different \$2.00. Juan Galé, Aviiés, Spain.

309 DIFFERENT—25c. U.S. Presidents On Foreign Stamps, Washington, Lincoln, On Foreign Stamps, Washington, Lincoln, Colored San-Marino commemorative—a unique historic Issuel Landing of Columbial Angola, "Bird Study" course in brilliant colors! Docens of other fascinating ent Stamp—all for 25c, With your request for approvals, Ocean Stamp Co., Box 64-P, Homecrest Sta. 29. Brooklys, New York.

250 STAMP hinges and 10 different Argentina free with approvals. Jaydee, 218 West Dickinson, Grand Rapids 7 Mich.

ANTIQUES, RELICS & INDIAN GOODS

SELLING 500 Historical Firearms. 20.000 Indian Reles, Collectors Cartridges,
Colns, Confederate Money.—Revolutionary
Colns, Confederate Money.—Revolutionary
Muskets, Blunderhusses, Kentucky Riftes,
Kentucky Riftes,
Worders, Statistics, Swords, Ramrods, Bayonets, Builetmolds.—Arrowheads, Tomahawks. Germpolits,—Mounted Birds
hawks. Germpolits,—Mounted Birds onets. Bulletinoids.—Arrowneads. Toma-hawks. Gempoints. — Mounted Birds. Squirrels. Deerheads. Steerhorns. Percus-sion Caps. etc. Send 35c for Illustrated catalog. Helke. Wenona 38, Ill.

SPECIAL: 10 Indianheads. \$.78—5 Arrowheads. \$1.23—Tomahawk. \$3.68—Scalping knife. \$1.88.—Sword. \$14.88—Bayonet. \$1.98—Geode. Pyrite. Molybdnum. Galena. Agate. Jasper, Selenite. Fossil. Gastropod. Crnoidstem. Chalcopyrite. each \$.48.—Helke. Wenona 28. Illinois.

MINERALS & PRECIOUS

GEMOLOGY Books! Catalog 10c. At-lantic Books. 2 Lawrence, Charlestown 29,

"WYOMING Gem Agate 1 pound \$1 post-paid. Thayer Products, Box 394, Alcova, Wyo,

GEMCUTTING Silvercraft authority, Il-lustrated magazine tells how. Cut rocks, make jewelpy, 150 ads illustrating equip-ment, offering gems for collectors, cutters, Postal brings literature. Lapidary Journal, Drawer D, Palm Desert, Calif.

TEN N. Mex. Minerals \$1.50; six fluorescents \$1.00; Foois Gold \$.25. Literature, Prospector. Winston 5, New Mexico.

GEMS. Precious and seml-precious, gen-uine, from world-wide sources. Deal Di-rect, no overhead, save money. Catalog 10c. Hill Co., 5450-K Portland Rd., Salem, Ore.

GEMSTONES, Mineral specimens, Every varlety, Lowest prices, Postcard brings free booklet, Plummer's, 4720 Point Loma Ave., San Diego 7, Callf.

HOBBIES, COLLECTIONS

INVENTING can be an interesting and profitable hobby. Write for complete particulars, Institute of American Inventors Dept. 30-E. 631-E St., N. W.. Washington 6, D.C.

33 ARMY patches, collar ornaments, Campaign ribbons plus introductory sur-prise, only \$1.00; prices 10c, Hobbyguild, Box 71. Sta "A". Brooklyn, New York. WANTED-Cigarette, tobacco cards. Write Charles Bray, East Bangor, Penna.

MINIATURE felt baseball pennants 16 for 25c, one for each American and National League team. Hart Processing, Marine City, Michigan.

GET acquainted offer, 50 different Matchbook Covers 25c, free lists, Yeingst, 502-A Parkway, Harrisburg, Penna.

AMAZING hobby—Collect authentic armed forces insignia, ribbon bars, embroidered patches, naval rates; fascinating assortment of 57 for only \$1; special gift free with order. Pritt Co., Dept. S-10, 14 West 27th Street, New York City. ART Studies for your morgue. Figure drawing, Famous paintings, Famous statuary. Animals in pen technique, Animals pencil and photos, Foliage and Scenery, \$1.00 each. Wonderful courses, drawing cartooning, lettering Send for catalog. Art Book Shop, Arnold 5, Missouri.

UNUSED matchbook covers—100 different \$1.00—36 page Catalog 25c—Charles Edelman, 1311P East 84, Cleveland 3, Ohlo.

SEND for our interesting hobby litera-ture. Collector-Hobbylst, Box 864, Denver,

Colorado. COLLECTORS—Genuine fern plant fos-sils \$1.00 postpaid. Fossil Exchange, 4340 Water St., Wheeling. West Virginia.

TROPICAL Fish—information 25c. Clarke Enterprises, Dept. A, Box 413, Janesville, Wisconsin

MAKE Leathercraft your hobby. Enjoy working with leather. Your leather belts, billfolds, purses make ideal gifts or possessions. Free Catalog. Tandy Leather, Box 397-D. Tulsa, Oklahoma.

PHOTO FINISHING, PHOTOCOPIES, ETC.

OIL coloring photographs can be a fas-cinating hobby or profitable sideline for those with artistic talent. Learn at home. Easy simplified method. Send for free booklet. National Photo Coloring School. 835 Diversey Parkway, Dept. 1744. Chicago 14. Illinois.

YOUR eight exposure roll developed with three prints each good negative 50c. Two each 40c. One each 30c, Reprints 50c. A few cents postage appreciated. L. A. Eastman. Bode. lowa.

ROLL Developed and 4x6 or 3½x4½ oversize glossy Velox prints. 8 exposure 40c. 12 exposure 60c. 16 exposure 80c. Clemet Photo Service, 1318 West Columbia Avenue, Philadelphia 22, Pa.

ENLARGEMENTS! Eight 5x7's or five 110's. \$1.00. Wilart Enlargers, Box 967, 8x10's, \$1.00. Wilart Little Rock, Arkansas NEW Photo Xmas Cards, Sample Book-let 15c. Margarlda Bros., 203-A Pitman Street, Fall River, Mass.

FREE Mallers. 8 contacts 30c. jumbos-40c. 12-45c. Jumbos-55c. reprints-4c, jumbos-5c. Western Photo PS102, Box 298. San Francisco 1, Calif.

JUMBO Album Prints, 8 Exposures \$.40, 2—\$.50, 16—\$ 60, Photoshop, Box 362, shpeming, Michigan,

PHOTOGRAPHY for pleasure or profit, Learn at home Practical basic training, Long established school, Pree booklet, American School of Photography, 835 Di-versey Parkway, Dept. 1727, Chicago 14.

NEW-16 oversize contact prints or 8 jumbos in album, 25c with this ad. Album Studios, Dept. S, Weatherford, Oklahoma. IMPORTANT documents photo copied— wills, service discharges, diplomas, birth certificates, etc. \$1 per copy per page Quick Copy Service, 175 W. Jackson, 411, PS. Chicago, Illinois.

33 MOTION PICTURES, SLIDES SOUND EQUIPMENT

GUARANTEED Fresh 8mm roll, magazine; 16mm roll, magazine movie film. Color, b&w. Free catalog. Eso-S. 47th Holly, Kansas City 2, Missouri.

8-16MM. Silent-sound films. Complete rental library. All latest subjects. Free catalogue, (sample film 10c). Garden Film, 317 West 50th. New York 19.

MOVIE Camera Film: 8mm roll \$1.50, 16mm 100' \$3.00. Free processing. Better Films, 742 New Lots, Brooklyn, N. Y. RENT 16MM sound films 50c reel, Large selection; free catalog, U. C. Film Serv-ice, 128 Chestnut St., Roselle Park, N. J.

ice. 128 Chestnut St., Roselle Park, N. J.
PRICED Like Wholesale and just re-leased—these new 1-ree! Blackhawk movies
see—sum silent (169), 84.89 plus 18p postsee—sum silent (169), 84.89 plus 18p postproperty of the seed
port, Iowa. LIST 16MM Sound Films All Types, Norman Dunn, Holland, Mich. 5.000 NEW-Used 8-16mm. Silent-Sound Films, International, 2120 Strauss. Brook-lyn 12, New York.

1971 12. New YOT.

GOVERNMENT Surplus 35mm official
military recognition Sildes—black and
white; four ply mounted; each numbered,
identified, cataloged, Equipment of various
nations; boxed in three classifications: 360
Bildes, Naval Vessels—300 Sildes, Mercles, 18,00 per classification; all three
\$10.00 Postpaid U.S.A. Fair Sales, Lima, O.

TAPE Recorders, Tapes, Accessories Un-usual Values, Dressner, 624 East 20th Street, New York City 9. WILD Life Films. Exciting, dramatic action in the natural habitat of fierce beasts of the jungle and forest, in smm or 16mm & 2*22° sildes. Beautiful Color or B&W write for Free illust. Hierature. Wild Life Films, 5151B Strohm Ave., No. Hollywood, Calif.

STEREO Fans! Stereo sildes gslore-also Precision Sereo Viewer \$2.95-10. Academy Award winning Stereo si.des-\$4.00-Stereo Lockslide mounts, mounting service-Send 25c for complete catalog & sample silde. Horner-Cooley Prod.. Inc., 6112 Selma Ave. Hollywood 28. Calif.

U. S. Secret Weapons in 3rd dimension. 10 full color views complete with viewer, \$1.00 postpaid. Stereo-Color Corporation, 1317 Commerce Bidg.. Rochester 4. New York.

34 CAMERAS, PHOTO SUPPLIES

BASS Says: Trading cameras a national habit since 1910. Write to Bass the old "Horse Trader." A postcard will do, Simply say: "Bass. I have and I want. How much will you allow me?" Satisfaction guaranteed. Bass Camera Compan. Dept. AG. 179 W. Madison St. Chicago 2.

INSURED and guaranteed repairs at trade prices, Camera Repair Corp. of America, 225-C Broadway, New York 7. ADD "Spice" to home projection shows with coloriul old-time Nickelodeon slides 2x2. Write for Free list, Nickelodeon Co., New Fieldner Bidg., Portland 5, Oregon. PHOTOGRAPHY for pleasure or profit. Learn at home, Practical basic training, Long established school. Write for book-let. American School of Photography, 35 Diversey Parkway, Dept. 174C. Chicago

WHOLESALE Photographic Supplies. Cameras, Films, Projectors, Enlargers, Write for Free Catalog, Capitol Photo Supplies, 2428 Guadalupe, Austin, Texas. HANEEL Stereo Camera, while they last, \$10.00, guaranteed—Easy to operate, perfect results, send cash or 25% deposit. Keys Stereo Products, 3823 East 7th Street, Long Beach 4. California.

MUSIC, INSTRUMENTS &

WANTED! Poems for musical settings Write Songwriters' Service, Clifton, N. J. POEMS Wanted to be set to music. Free examination. Send poems. McNeil. Master of Music. 510-PS. S. Alexandria. Los Angeles. California.

POEMS Wanted for musical setting.
Send poems for free examination. Five
Star Music Masters, 646 Beacon Bidg..
Beston, Mass.

POPULAR Songs, How to write and sell them, Write for free booklet Successful Songwriting, Gateway Songs, Box 2470, Hollywood 28, California.

POEMS Wanted for musical setting on percentage basis. Broadcast consideration. Sconer Song Co., 22-PS North West 8th, Oklahoma City 2.

POEMS Wanted | Opportunity Knocks |
Nationally Known Song Writer composes music to your song poems, Send poems today for free examination and free copy of "Song Writing Secrets" Melody House, Dept. PS. Box 19007 La Tijera Station. Los Angeles 43. Calif.

SWISS Musical Movements. First Quality, \$2.50. Spielman, 131 West 42nd, New York 36.

YOUR Words and our music—a winning combination! Send poems. Free examination. Song Promotion Guild, 350-S Broadway. New York 13.

SENSATIONAL Free Booklet. "How To Write and Seil Songs." Get the facts first, Foems examined Free, Reliable Music Service, Box 430-B, Hollywood 22, Call. SONGWRITERS! Send poems, songs. Music Service, 243 West 72nd St., PS, New York 23.

MUSIC printing, for samples, rates write Auto-Litho, Jensen Beach 2. Florida. NEW. Simplified, Rhyming Word List \$1,00. Song Poems examined free, Broadway Song Service, Suite 301-S-10, 1650 Broadway, New York City.

PLAY Plano By Earl Simplified Particulars. Box 475-H. Lomita, California. FREE poem examination. Hear what music we can write to Your poem! Order our song hit. "You Can't Make Honey." Record \$1.25. Music copy 50c. Song Service, 333 W. 55th. Dept. P.S., New York

ice, 333 W. 56th, Dept. P.S., New York 19, N. Y. ELECTRIC Guitars, accordions, amplifiers. Wholesale, Free catalog. Carvin, Baldwin Park, Caiif.

6 RADIO, TELEVISION, SUPPLIES & EQUIPMENT

MAKE simple, tubeless, batteryless, distance-getting crystal radios. Crystal and illustrated instructions 25c postpaid. Allen, 427-S. Clinton. Mo.

SULD J. S. Redice—Only st. 20 Each. F. BUILD J. S. Redice—Only st. 20 Each. F. BUILD J. S. Redice—Only st. 20 Each. F. Course, includes Trouble-Shooting and Servicing Lessons, Radio Principles, Ood Servicing Lessons, Radio Principles, Ood Repairs, You build and keep Receivers, Transmitters, Amplifiers, Test Equipment, Course of the Cour

FREE 236 Page 1953 Television-Radio-Electronic Catalogi World's largest stocks, lowest prices, Complete supplies for buildkeep to the complete supplies for buildlatest television. radios, phonos, recorders, sound equipment. Thousands of parts, tubes, test histruments, books, diagrams, tubes, test histruments, books, diagrams, yours now! Allied Radio Corp., 833 W. Jackson Bivd., Dept. 31.8-2. Chicago 7,

MAKE Distance-Getting crystal radio that works. Fully lifustrated booklet fifteen cents. Money back guarantee, Francis, Box 5963, Cleveland, Ohio.

DEALERS, Servicemen, Agents Wanted: We seek men in ali parts of the country to seil Radio and Television Tubes, Ali those selected will be given the best prices and warranty deal. We Want active people on our side! The Rose Co., 98S Park Place, New York 7, N. Y.

ELECTRONIC Problems, devices, advice, Free information, Registered Engineer, 5208-F Onacrest, Los Angeies 43.
TUBES, Etc. Free List. Wholesaie Electronics, 224 E, 204th Street, New York City.

LONG-Distance (R.F. ampification), Single-Tube, Loudspeaker Radio; circuitinstruction 30c, Serco, X261B, Waltham,

37 BUSINESS OPPORTUNITIES

GOOD Paying Business Silvering mirrors, plating autoparts, reflectors, bicycles, bathroom fixtures, etc., by late methods, No tanks or shop required, outfit furnished. Free Booklet, Gunmetal Co., Ave. E. Decatur, Illinois.

LIQUID Moiding rubber, \$2.95 quart, \$9.95 galion prepaid! Piastercraft Supply Company, 3051 St. Clair Ave., Cieveland 14. Ohio.

EXTRA Money—No Selling—operate vendors, Amazing profits, details Free, Sliver King, Sulte 221, 622 Diversey, Chicago 14.

OPERATE profitable mail order business. Write Waiter Service, 4159-B East 112th, Cleveland 5, Ohlo.

MAKE money addressing envelopes. Our instructions reveal how. Glen Gienway, 5713 Euclid. Cieveland 3. Ohio.

HOW and where to obtain Capitai? Free details. Star Service. Wapakoneta, Ohio. RECAST oid batteries into new, Latest achievements. Battery Laboratories, Minneapolis.

MAKE \$3.00 Hour At Home—I do—making sandais, George Youngs, 1308 South First, Arcadia, California.

\$ AN Hr. & more possible in your home. You Can Paint 11 With Suede—Fabilous Frainbow color—Auto dashbeards and trunks—Skris—Radios—Tors—Fleurines—Lamps—te.—beautified with manzine new touch-appeal as well as ere-appeal. I'll send you complete, step-br-tep plans and gui for hor like examination in your own home. Send no mones—such tame and address. Coast, 1004-AC S. Los Angeles St., Los Angeles St., Los Angeles St., Los Angeles St.,

START Mallorder Bookshop—Build your future, 25c brings booklet, samples, exciting ideas, General Publications, Ossining 1, New York.

ELECTRO Plating equipment—New and used. Complete assemblies. All sizes for all types of plating. Baby shoe metallizing sets. Mounts. supplies. instructions. Free catalog. Hollywood Bronze Supply. Dept. R. 1624 E. First Street, Los Angeles 33. Cal.

MAKE Money spare or full time, easting Make Money spare or full time, casting Make Money spare or full time, casting Make Money Spare or Money Spare November of Spare or Money Spare November Office of Spare or Money Spare November Office or Money Spare November Office or Money Spare November Office or Money One Spare Office or Money One Office or Money Offic

ENVELOPES addressed accurately, reasonably. Past Service, We have capable addressers in your city. Gienway System, 5713-X Euclid. Cleveland 3. Ohio.

EARN Extra Money weekly malling circulars for advertisers. Complete instructions—25c. Sivasilan, 4317-B Gleane Street, Elimhurst 73, New York.

NATURAL Molding Latex, Extra thick, Free sample, W. Wooley, 115B Donald, Peoria, Illinois.

BIG Money and fun growing Live Miniature Ming Trees on your window siii, Write for Free rare tree seed and plan, National Nursery Gardens, 8463 South Van Ness, Inglewood 4, Cailf.

VENDING Machines—A post card may bring you the opportunity you are walting for. No experience necessary. Stamps, nut. candy, gum and others. Smail investment, Write Schoenbach Enterprise, Dept. 9. 1645 Bedford Ave., Brooklyn 25, N. Y.

MAKE Money at home-maling literature-running Ads. Pleasant and profitable. Write Miller. 1772-R Carlyon Road, East Cleveland 12. Ohlo.

EARY \$12.00-320.000 annually. Franchize protects Gluoranteed minimus \$12.500 or money back Live at home. No merchandise to buy, Selfemployed. One most exclusive and noncompetitive bustance of the selfent of the selfe

MAKE Rubber Stamps, repair dolls, learn invisible reweaving, repair sewing machines, Catalogue of "40 Ideas." Universal. Box 1076-B, Peoria, Ili, IMPORT-Exporti Opportunity, profitable, world-wide, mail-order business from home, without capitati, or travel abroad, Established World Trader ships instructions for no-risk examination. Experience unnecessary. Free details, Mellinger 1A. Los Angeles 24.

WATERLESS Hand Cleaners. Highly profitable home mail order and mfg. business. Simply add water to concentrates or ready-packed under your own label. Everything furnished. Western G Aircraft, Los Angeles 19.

LEARN Sewing Machine Repair, Electrify, Rent, Sell Spare Time, Make "Big Money" like our other Men-Women do. New machines motors, parts wholesale. Details free, Taylor Service, Hamilton PS-10. Ohio.

LEARN metalizing baby shoes, jeweiry, gifts. Bronze, gold, silver, Complete success plan free, Kiktayl Bullding, 7217-PS South Broadway, Los Angeles 3.

South Broadway, Los Angeles 3.

VENDING Machines earn big money! An investment as low as \$10.50 will start you in this fascinating profitable business prou in this fascinating profitable business and independence. Routes can be established and operated in either full or spare time with no experience needed. Write for trating our nut, candy, gum and stamp vendors: also pin ball machines, music boxes, etc. Write immediately to Parkway boxes, etc. Write immediately to Parkway Sitrett, Baltimore 2. Maryland.

MAKE Money At Home as represent

MAKE Money At Home as renewal headquarters for all magazines. Big Christmas sales profits now Liberal commissions. Supplies furnished. Write for Free Catalog, McGregor Magazine Agency, Dept. 510B. Mount Morris. Illinois.

"MAKE Perfume" Profitable Mallorder business-Octatiogue Free. "International." 6347 Parnell—P8-10, Chicago 21, III. ALL Profit: Get manufacturer's distributor's dealer's profits yourself by making, selling, installing important healing specialties, Details free. Harrington, Box 103E, St. Matthews, Kentucky.

MAKE Perfumes At Home. Write. "Carey Laboratories." 1914 Chouteau PS-10, St. Louis 3. Missouri.

"PROFFTABLE Decorating Business."
Residuating Internative CO 18 409, Fran
Council, Box 150-P, Wildwood, New Jersey,
EARN Money At Home Wild Wood, New Jersey,
while Spare time! Details free, Edwards,
Publisher, 3915-PS, 12th, Dec Moines 13, 18,
BUY Wholesale thousands nationally
advertised products at big discount. Sent
free. "The Wholesale Plan." American
Buyers' Service, 239-S Lindon, Buffalo, NY.

CLEAN automobiles, wash walls, carpets, uphoistery. Complete outfit and instructions. One gailon concentrate—special gun only 89.95. Zlpp-reme Chemicai Co., Dept. P. Greensburg. Pa.

NATURAL Molding Rubber free sample. Tribby Supply, Post Office Box 3991 Station F. Jacksonville. Florida.

BIG money in your own business. Details free. How. Box 884-B, St. Louis, Missouri.

free, How, Box 684-B, St. Louis, Missouri.
TO \$35.00 Weekly, Spare Time, Home
Operated, Mailorder Business, Successfui
"Beginner's" Pian. Everything supplied.
Lynn, 10420-C National, Los Angeles 34,
California.

MAKE wishing weils, game of skill, start route, cafes, taverns, sell for home banks, easy to make, keeps winners separate, locked securely, inexpensive, pays for itself over and over again. Complete instructions, diagram \$1.00. Albright Sales, P.O. Box 241, Waukegan, Illinois,

THRILLING Profitable Home Business.
Make fast-selier chenille monkey trees,
dolls, flowers. Terrific holiday demand.
Information free, Velva, Bohemia 17, N.Y.
MONEY in new greaseless doughnuts.

MONEY in new greaseless doughnuts, Start in kitchen. No smoke. Seli stores. Free recipes, S. Ray Co., 3605 South 15 Ave., Minneapoils 7, Minn.

MAKE Gifts, Noveitles, Jeweiry, from sea shells, fish scales, plastics! Wholesale, litustrated cataiog 10c. Giftcrafts, Box 4550-PP Coral Gabies, Florida.

FOR an extremely profitable lifetime business, operate a Collection Agency, Quickly learned, Write Cole Associates, Syracuse 2, New York.

Syracuse 2. New YOYK.

MAKE \$6.12 Every Time You sell one—
and they're amazinely easy to sell' We
tony carlons you can sell for only \$4.88
and you make \$45'. They're executive
model portables, precision built with automodel portables, precision built with autorearranteed. Send for lite size color photo
with full details. Write today to Lightning
Adding Machine Co., Inc., Dept. PS-6,
1260 West Second Street, L. A. 26. Calif.

START your own Mail Order business with hundreds of repeat, sales proven, hobby-craft items. No stock to carry, no shipments to make. We pack and ship for you, For details and instructions send 25c. Mail Order Service. Dept. FS25, 845 S. Wabsah, Chicago S. Hillond

Wabash, Chicago B, Almons.

EXCLUSIVE distributors, Amazing new DDT moth-resistant genuine crushed redwood ceda? Pervents moth damage to wood ceda? Pervents moth damage to closets, drawers, Applied like paint; laboratory tested. Hardware, paint, building supply dealers, contractors buy quantilies. Tremendous profit potential Low priced; Tremendous profit potential Low priced; Dealers, and Company of the Comp

STARS time business Soil colorful De-cateomania Rome Decorations for Micha-ler and Start Carlon Start Carlon Start neighbors buy on sight. Millions sold every year. Start carning real money how. Up plan plus test assortment on approval-plan plus test assortment on approval-send no money. Decal Art Co. Dept. 19-10, 344 N. Lord. Chicago 44. Illinois.

\$25 WEEKLY Working two hours daily. No canvassing. No manufacturing. Lycke, Box 2471-B, Cieveland 12, Ohio.

ADVERTISING book matches—Cash in on big demand—sell Union Label matches. Cuts for all businesses and potitical parties—Free powerhouse selling kit—low prices—protection guaranteed on repeat orders—Cash commissions, Superior Match Co., Dept. PX-1052, 7330 Greenwood, Chicago

SELL by mail; free details; instructive bookiet 25c. Manhattan House, Box 51-L, St. Aibans 12, New York.

WANTED! Home Producers, by Manu-lacturers in our Contact Service. Become a for these companies. Thousands of easy-to-make items required. Cash in at home, without previous experience. Write for Free list of 100 most wanted items. Plastic Service Associates, Dept. 1958, East Boston Mass

LIQUID Rubber, make flexible moids. Free Sample. Chaney, 1130 E. 16th St., Jacksonville 6, Fla.

RAISE Goidfish—Big profits. Send \$1.00 for Breeder's Manual, Noble Fisheries, R.F.D. #1, Midiothian, Virginia.

MAKE flexible molds! Cast plaques, ookends, figurines! Free sample! H. ooker, 630-A Chestnut, Hamilton, Ohio.

OPERATE Profitable Mailorder Business. Particulars Free. George Lenhoff, Lincoin 1. Nebraska.

BE A Jobber without investment, with-BE A Jobber without investment, with-out inventory. Discounts 50% and more-even on small orders. Draw from \$250,000 stock. Sell stores. individuals. Profits up to 100%. Terrific line of toys, novetites, Jewelry. Free Catalog. Modern Merchan-dise, Dept. 17, 169 W. Madison, Chicago Iiiinois

SELL! Buy! Trade! anything. Read, "Trading Post Magazine" 20c. Thorne's, 525 Dewey, Jackson 45, Mich.

APPLIANCES, Radios, Jeweiry, Gifts. Wholesale Priceiist, Belmont, 200-2 Hins-daie St., Brooklyn 7, N. Y.

MAIL Selling opportunities gaiore! Free! Wenner, Box 142-E. Roxbury 19, Mass. INCOME from local information. No selling. Write—Neherco, La Verne 6. Calif.

ETCH initials, designs on giass. Sensa-tional profits! Outfit \$2.00. Free details. Beardsley, 2045 Chestnut, Philadeiphia, Pa.

SPECIALIZED Magazines covering your field will help You to success. Get intest Service Hundreds of business, trade professional, educational, farming, sport, hobby, pets, stationery, store displays, sign, hobby, pets, stationery, store displays, sign, working, writer and others covering all interests. Send for List today, 1's Free Commercial Engraving Publishing Company, 748 North Ritter, indianapolis 10, Ind.

MEN'S. Chiidren's sox unconditionally guaran'eed for full year, Send 25c for in-formation. Saiesmen's Inquiries welcomed. R. K. Chiison, 3120 Nevin Ave., Rich-R. K. Chiison, mond. California.

HOW to Earn Money as a Manufacturers Agent, Free details, International Trading Center, 1900-E Euclid Ave., Cleveland, O.

NEW Kind Mail Order Home Work! Carry no merchandise, No selling, manufacturing, experience, advertising investment, capital necessary. Eye-opening proof 3c stamp. P. Torrey, Meirose 76, Mass.

THROWN Away! Tons of ground rubber by recappers. Make it into Plastic Rubber! 1.000 uses! Easy! Inexpensive! Start prof-itable business! Instructions, samples \$1.00. Ceeten Products. 508-S. Cornelia, Ga.

SELL By Mail to automobile owners, Millions of prospects, Fast selling items, Everything iurnished. Write: Eastern, Box 142-S. Dorchester 24, Mass,

GET Dollar Orders by Mail—keep 90c. 10 starts You. Details free. Genmerco, lox 142-K. Dorchester 24, Mass, POPCORN and Potato Chip equipment. Long Eakins Company, 5263 High, Spring-field 99. Ohio.

SMALL investment in Artkote molds, puts you in \$5.00 hour stone facing busi-ness, Sample mold \$2.00. Dividend Com-pany, Liverpool. New York.

START Business without Capitai! Re-ilance, 15-B Park Row, New York 38, N. Y. HAVE Home Mail Business—Success assured beginners with \$100 or more. Idea-Mailbox Service. Booklet 25c. Details Free, NMD Agency, Box 88-K, Dorchester 22, Mass.

HOMEWORK — easy — profitable. Rus name, Slegel, Box 183-PS, New York 2. ADDRESS Envelopes, Postais, at home longhand, typewriter, Particulars stamp, G. Torrey, Meirose 76, Mass.

BIG profits at home, Mirror resilvering, blue-ing guns, electroplating with chrome, silver, nickel, gold, copper, Portable elec-troplater, piating saits, formulas, instruc-tion manual, \$5,95. Free bookiet, Tyco Metais, Box 13231-CL. Houston 19, Texas.

EXPERIENCED Roof Repairer Fran-nise Protection. Luster-Kote, 19417 Derby chise Protection. L. Detroit, Michigan.

FIX typewriters, Free booklet describes our modern, inexpensive home-study course, Factory methods taught, Write: Typewriter, Building 4, Tarentum, Penn, \$46 FROM Square Foot Piywood; Jigsaw ecessary. Write: Woodart, Bridgewater, necessary. Wri Massachusetts.

\$4.000 PROFIT in two months reported. No investment, Details 50c. Charles Com-pany, 12-EAH, Norwood, Ohio. COLORGIAZED Concrete Pottery made without moids. Patented method. Cemetery products, novelies, tiles. Basement leak-sealing. Money-making projects. Booklet, details free. Men only. National Potteries. Grand Rapids. "Minnesota."

SENSIBLE, profitable, delightful busi-ness, Trifling capital, Carl Jamer, Manor-ville 5, New York.

ville 5. New York.
FIGURINES unpainted, free illustrated list, Haverty Products, \$22-A 17th Street, Altoona, Fenne, Senne, Senne

SELL Printing by Mail! We fill orders. Free plans, samples, Sutton Printing, Bex 853-B, Waycross, Georgia.

JOBBER-Deaiers. Power mowers— \$39.60. Delivered. '53 models. County agency deal. Rotacut-52, Excelsior Springs, Missouri

JUMBO Floating Henryburger Territory Franchise. National Food Sensation Smail Investment, Wire Airmail for Facts. Jesse and Jesse. P. O. Box P-936, Wichita, Kans. LEARN Invisible Reweaving! Details free, Harris, P. O. Box 7112, New Orleans,

\$250 WEEK reported! Free book "505 Odd, Successful Businesses." Work home! Expect something Odd! Pacific-36C Oceanside, California,

"HOME Addressing and Mailing Oppor-tunities." Vital Information—\$1, Universal Mail, Box 467, Dept. 6, Huntington, Ind. MEN. Women.—"Everybody Likes Candy." Learn to make professionally at home. Tools and supplies. (Our 42nd year.) Rags-dale Candles. East Orange, N. J.

BUY it wholesale, Manufacturers, Dis-tributors, Over \$50,000 items, Literature free, Olsen, 1231-B East Third St., Duluth 5, Minnesota.

DRUG Sundries, Ail popular brands latex. Fresh stock, Seil to drug stores, physicians and jobbers, Free distributors price list. Sanitary Sales Co., Box 934, Rockford, Illinois.

NEW \$\$\$\$\$ Fabulous Home-Business Jewelize' Finish, Free Sample, Free "Jeweiize" Finish, Free Sample, Free \$\$\$\$\$ Pian, Peari-Art, 7216 Bear, Beil, Calif.

MEN-Women! Let up prove how you can make Big Money at home making nover-make Big Money at home making nover-ture to the control of the control of the vious experience necessary. We supply names of interested buyers for your fin-information), Send for Free Cataloga-information), Send for Free Cataloga-information), Send for Free Cataloga-write: Bing Froducts, PSi052, Watertown 72. Mass.

DID you see our ad on page 60? Purifoy Upholstery Service.

MONEYMAKING OPPORTUNITIES

21 POFOGRN, Candy Apple Formulas, proven money-makers, Send \$1 today for formulas, catalog of money-making ideas. Concession Supply, 3916 Secor. Toledo, O. SPARETIME Profits Taking Subscriptions Ali Magazines: Wholesale Catalog Free. Cassell Fullishers. Westfield 1, N. J.

Free. Cassell Publishers. Westfield 1. N. J.
BE Appointed State Notary Public Now
Details: Stationers. Helotes. Texas.
10.800 FROFITES Your own Mailorder
10.800 FROFITES Your own Mailorder
(worth \$2) Free! Write today! Treasury.
19 Storer. New Rochelle F8-4, New York.
MAKE Money—Sewing and Assembling
thome. Liebly Industries. Beaver Dam 7.

DETECTIVES Earn Big Money. Experience unnecessary. Detective Particulars free. Wagoner. P-125 West 86th. N. Y. 24.
PLEASURE and Profit Preserve live flowers to last for years. Details free. Trial size \$1.00. Refundable. Hermansen, 210 Pitth Avenue. New York 10, N. Y..

SCHOOL Seniors—Earn sensational profits seiling classmates America's Most Beautiful Graduation Name Cards, Largest selection, Outselis all others. Free sample kit, Printeraft, Dept. P, 1509 Mapie Street, Scranton 5, Pa.

START a buying service, buy wholesale thousands nationally advertised products. Make big profits selling at sizable discounts. Send postcard for details. American Buyers' Service, 631-8 Linden, Buffaio. New York.

START home candy kitchen. Interesting information free. Schenck. 717-S W. Penn, Butler, Penna.

LEARN Watch-Clock Repairing at home. while learning we fix your watches. Free information, Modern Technical Supply Co., 55-PS West 42nd Street, New York 36.

MAKE tremendous profits with fast-seiling Costume Jewelry! Buy Direct! Sell your friends, nelghbors and customers at big savings to them! Write for our Free Catalog! Penn Jewelry, Dept. 17, 826 W. Lacka. Scranton, Pa.

Lacka. Scranton. Pa.

SILK Screen Printing. Easy to learn.
Operate own business. Complete course
offered on money back Guarantee. 100
ltems to Screen print—100 ways to sell.
Low cost. Build national local business.
Write, Typecratters, 510-E West Susquehanna. Philadelphia 22. Penna.

YOU can earn money easily at Home securing subscription by addressing and mailing Our Literature. Write Martin's Service, Preston, Virginia. Addressed envelope appreciated. Martin's

velope appreciated.
GET Extra Money. Make imported rhinestones into gorgeous jewelry. We furnish
everything—show you how! Complete crystal earring and bracelet kit plus "Success
Book" only \$1.00. Money back guarantee.
Book alone, 10c. Gemcraft, 18131 E. 13th.
Cleveland 14. Ohio.

MAKE Money addressing Envelopes! Our information reveals how. Only 30c, Business. Dept. 45-K, P.O. Box 2224. St. Louls. Mo.

WIN contest money. General Contest Bulletin gives hundreds of tips. Lists cur-rent contests and rules. Sample 25c. Gen-eral Contests, 1609-A East 5th, Duluth.

"DUPLISCALER"—Scales anything Engraving, carving attachment. Sample engraving 25c. Desco, 6334-P Sepulveda, Van Nuys, Calif.

EARN Money Evenings, copying and du-plicating comic cartoons for advertisers. Adservice, Argyle 2, Wisconsin,

SELL Titania gems; \$9.75 carat whole-sale. More brilliant than Diamonds. Free catalogue. Diamonite, 1404-S Mitchell, Oakland 1. Calif. CONVERT Junk Batterles into New. Latest Developments. Wertz, 106 Amanda,

Pekin,

ekin, Ill.

MONEY! We buy used tln-cans. Inforatlan 50c. Cutler Research, Box 154. mation 50c. Cutler Re Danville, Pennsylvania, ADDRESS Envelopes! We Pay Cash! utfit—25c, Hirsch, Spring Valley 3, N. Y.

TYPEWRITER Owners make handsome profits, Get details today, Groves Com-pany, 682. Hastings 3, Nebraska,

\$35 WEEKLY addressing envelopes. In-structions \$1, refundable. Adservice, Spring Valley 36, New York.

\$100.000—CONTESTS. Helpful Books; Services. Inquire. Contests, 13H Earl. Red Bank, New Jersey. SELL by Mail. 12 tested plans, 25c. Edwards, Box 1067, Allen Park, Michigan.

SELL Books, Merchandise, By Mail. Everything furnished! Free details, Para-gon, Box 5-A, Providence 8, R. I.

MANUFACTORE Rhinestone and Pearl Jewelry at home, Latest creations, tremendous profits, no skill needed, Postcard brings illustrated catalog of settings, stones, etc. A. V. Cutt Co., Inc., 210-H Fifth Ave., New York 10, New York \$\$\$ IN Personalized Baby Record Books.

Sell By Mall Use Same Literature We Do. No-Co-Ro, Oakland 6-P, Calif.

FREE Book "505 Odd, Successful Businesses." Work Home! Expect something Odd! Pacific-35C, Oceanside, Callf.

\$200.00 FOR 12 hours fascinating work at home. Temporary. Orinda Company, Lansdowne 8, Penna.

WE pay you highest rates for hand-decorating greeting cards. Work home. Experience unnecessary. No selling re-quired. Greetings, 100 Madison, Detroit 26.

DID you see our ad on page 60? Purifoy Upholstery Service.

FORMULAS, PLANS, ETC.

BRAND New, Spectacular Chemical and Fireworks Experiments Manual. Complete Set-ups, Formulas, Instructions \$1.00. Qhemi-Technix Laboratories, 568B Riley Street, Buffalo 8, New York.

FORMULAS—All kinds, Latest products, Literature free, Kemlco, Park Ridge 15, Ill.

500 FORMULAS and Recipes, Riches in Recipes, Tried and Tested processes for home, Factorv and workshop, 25c post-paid, Allen, 427-FS, Clinton, Missouri.

BOOK-10,000 Formulas, Processes, \$3.98 Postpaid, Free literature, Kenneth Paullin, Loudonville, Ohio.

STRANGE, Exciting, Unusual experi-ments, New booklet "Fascinating Chem-lstry" unusual educational, Only \$1.00. Chester Garlanger, 1019 Pearl St., St. Jo-Mich

FOR the best in modern manufacturing formulas, get my literature! Est_blished 1897. Liscombe Miller, Tampa, Florida, LABORATORY tested formulas. Lists free Pont. Box 635-PS. Terre Haute. Ind.

PLASTICS

NEW liquid casting plastic, Clear, colors, Embed flowers, insects, coins, Saw, drill, carve, Send 25c for Wholesale Catalog and New Sales Manual showing how to make money at home, Castolite, Dept. L-102, Woodstock, Illinois.

REINFORCED Plastics replace metals, wood, ceramic products by hundreds aiready. Start your own shop in spare time with small capital. Send 25c for samples and information. Mardon Reinforced Plastics. Box 489. Glen Cove. N. Y.

PLASTICS, Lucite, Plexiglas, Acetates, complete supplies, Retail-wholesale prices. Catalog 10c. Gem-O'-Lite, Box 686N, North Hollywood, Calif.

CHEMICALS & APPARATUS

LUMINOUS Paints will glow in dark. Six colors, Fairmount Chemical Co., 136 Liberty St., New York City 6.

NEW Idea Chemical and Apparatus Out-fits for Home Experimenting, Photo-Scales, Microscopes, Chemicals, Biological and Laboratory Supplies in Small Quantities, Cetalog 25c. Established 1931, John H. Winn, 124-B West 23rd Street, New York 11, N. Y.

ILLUSTRATED Catalog: Chemistry, mineralogy, blology, 10c. Tracey Laborato-ries, Evanston, Illinois.

SAVE Money! Supplies Catalog 20c, re-fundable. Laboratory Sales. Box 161-G, Brighton, Mass.

LABORATORY Apparatus. Chemicals, Microscopes. Complete Chemistry Sets. Minerals, Uranium Ore. 10c brings cata-log. Porter Chemical Company, Hagerstown 2, Maryland.

BRAND New, Spectacular Chemical and Fireworks Experiments Manual, Complete Set-ups. Formulas. Instructions \$1.00. Chemi-Technix Laboratories, 568B Riley Street, Buffalo 8, New York.

SPECTROSCOPE for quick chemical analysis \$3.00. Cutting Sons, Los Altos, Calif.

CHEMICALS and apparatus for indus-trial analytical, and private laboratories. Catalog 20c. Dept. M-26, Biological Supply Co., 1176 Mt. Hope Ave., Rochester 20. N.Y.

AMAZING New Book of Science. Experiments, Formulas and catalogue of Laboratory Supplies. Only 25c; National Scientific Co., Dept. 15, 2204 W, North Ave., Chicago 47, Illinois.

HELP WANTED

FOREIGN & Latin American Employment 1952 "Foreign Service Directory" gives Up-To-Mimute Facts on Military & Green Williams (Facts on Military & Major Oll Listings, Aviation, Transportation, Steamblp Lines, Mining, Importers, Exporters, How-When-Where to apply, application forms, Hot List Firms Hiring, 31.06 post-paid, Global Reports, P.O. Box 882-8, Hollywood 28, Calif.

\$1.000.000 CONSTRUCTION Projects, "World Wide" printed Monthly Foreign & Domestic employment, Free application blanks tells How-When-Where to apply, \$1.00 complete, Global Reports, P.O. Box 883-PX. Hollywood 28, California.

883-FA. Hollwood ze. Camouna.
FOREIGN Employment Construction
men, building trades, helpers, office men,
others, interested in Foreign Projects.
High wages, quarters, transportation, Send
st for Foreign Construction Compendium
and Application Forms. Foreign Service
Bureau, Dept. PS-10. Metuchen, New Jerand Application Forms. Forms, Bureau, Dept. PS-10, Metuchen, sey, (Not an employment Agency— CONSTRUCTION Job List. Published Monthly. \$1.00. Dempster's Construction Scout News, Dept. 268-DR, Bridgeport.

SHINE Shoes Without "Polish". New invention. Lightning seller. Shoes gleam like mirror. Samples sent on trial. Kristee 176. Akron, Ohlo.

INTERESTED in foreign employment? Hundreds of Jobs worldwide. Latest infor-mation and applications \$1.00. Overseas Jobs. Dept. 335-B2. Baton Rouge, La.

ALASKA—Last American Frontier, \$1.00 mins; 1892 Business Directory, Govern-brings; 1892 Business Directory, Govern-brings; 1892 Business Directory, Govern-brings; 1892 Business Directory, Govern-brings; 1892 Business Directory, 1892 Business Dire

FOREIGN Jobs. Contracts underway and soon starting in Africa South Amer-lea, Canada England, Europe, South Pa-cific, Middle East, Mexico and Alaska, Send \$1.00 for foreign job news informa-tion, application forms, etc. DCS Foreign tion, application forms, etc. DCS Fore Job News, Dept. 268-DQ. Bridgeport,

TIRED of no money, second rate jobs? Like to start a real career with a lifetime of high salarles? Write me about two growing fields that need men. Ed Howes. Dept. 5102. 456 W. Santa Barbara Ave., Los Angeles 37. Calif.

OVER \$1000 a month are the wages of common laborers on some construction jobs. The most complete world wide listings may be had at small cost. For information contact us immediately. Construction Workers Service Co., 1111 Commerce Bidg., St. Paul, Minn.

EARN \$1000.00 month in Bookkeeping or Income Tax Business, Details Free, Uni-versal, Box 664-P, Springfield, Mo.

MICHIGAN Employment opportunities-All types—all areas—lists \$1.00. F. Mada; 322 Shearer Bidg., Bay City, Mich.

CALIFORNIA—There is a job waiting for you in California Critical manpower shortage in Los Angeles area, Ail classification now open. Send \$2.00. California Job Information Service. Box 556. North Job Information Hollywood, Calif.

GREENLAND alrbase job. Hiring hundreds monthly. Laborers earn \$1100/month. skilled more. Full information, 50c. Jobservice. Box 1565. Billings, Mont.

AGENTS WANTED

NEW Jobs open in seiling! Send name, address for five free issues of Opportunity Magazine's money-making guide. Histing hundreds of companies who'll pay you well, full or part-time. No experience needed, Opportunity, 28 E. Jackson, Dept. 18. Chicago 4. Illinois.

MAKE Wedding Profits. Sell invitations. napkins, matches, Samples free, Dunbar's. Middlebush 5, N. J.

PRINTING — Salesbooks — Envelopes. Free Illustrated Catalog—Ersco, Dept. S. Bronx 72, New York.

GOLD Lacquered and silver sign letters. Windows, doors, trucks, Standard Sizes, Penny and up, Samples, Atlas-G, 544 West 79th, Chicago 20.

START Your Own Business on credit.
Your own boss, 1886 of our Dealers sold
\$5.00 to \$27.500 in 1981, We supply stocks,
equipment on credit, 200 home necessities,
equipment business backed by world-wide
industry, Write Rawleighs, Dept. J-U-PSC,
Preeport, III.

AGENTS—300% profit seiling genuine gold window letters: stores and offices. Free samples. Metallic Sign Letter Co., 431-E North Clark, Chicago.

DO YON NEW MOREY, CHICAGO.

DO YON NEW MONEY 335.00 Is yours for seiling only 50 boxes of our 300 Christmas Card line. This can be done in a single day. Pree samples. Other leading boxes on ence unnecessary. Pree samples Personalized Christmas Cards, Stationery, Naphin, Write today, It costs you nothing to try. Cheerful Card Co., 10 White Plains, New York.

FAST seilers. Big demand Catalog. Parker Drug Co., Hoboken 6, New Jersey. FREE Book where to buy 800,000 articles from manufacturers at Wholesale Prices. Save up to 50% on Nationally Advertised Merchandise, Rush name for Free copy. Glass Pub. Co., Eliwood City 1, Penns.

MAKE Money Introducing World's cutest children's dresses. Big selection adorable styles. Low prices. Complete display free. Rush name. Harford, Dept. H-4341. Cin-Rush name. Har cinnati 25. Ohlo.

SHINE Shoes Without "Polish." New invention, Lightning seiler, Shoes gleam itke mirror. Samples sent on trial, Kristee 150, Akron, Ohlo.

BIG Bargains! Terrific Profits! Seiling new-used Ciothing. Suits \$1.75. Pants 35c. Topocats \$1.00. Dresses 20c. Shoes 20c. As little as \$10 starts you. No experience nec-essary. Free Wholesaie Cataiog. Superior, 1250-B Jefferson. Chicago 7.

QUICK Extra Cash! Sell America's outstanding line of Christmas box assortments and personalized lines. Sell America's playing carda, wedding invitations gift items, deiuxe abum of exclusive carda, nylon hoslery. Write today for 60 free samples in six beautiful portfolios, Gift catalog included, Burnard Chicago. Dent. 9, 5350 Sb. Western Avr., Chicago 36, Ili.

I'LL put a "Shoe Store Business" in your pocket! Nation's Leader trains you to make Big Money! Fit men, women. Free Sample Outfit—Write Today! Mason Shoe Co., Dept. MA-15, Chippewa Falls, Wis.

CALIFORNIA sweet smelling beads, sen-sational sellers, Particulars free, Mission, 2328P West Pico, Los Angeles 6, Cailf.

NEED Extra Cash? Free Saies Kit. Seil personal initialed buckles with belts. can badges, tie clasps etc. Choose from 3000 emblems. Hook-Fast. Box 1425FS. Providence. Rhode Island.

ANYONE can sell Hoover DuPont Nylon Uniforms for beauty shops, waitresses, doctors, nurses, others, In white and colors. Exclusive styles. Top quality, Low priced. Exceptional income. Real future. Equipment free, Write fully, Hoover, Dept. G-101, New York 11. N. Y.

BIG profits seiling ties (\$2.00 values) \$6.50 dozen. Free catalog. Empire Cravats, 648A Broadway. New York 12.

BE A Money Maker Represent magazines year around. Wonderful home work, Big Christmas profits now Liberal commissions. Everything furnished. Write for Free Catalog. McGregor Magazine Agency. Dept. 510A. Mount Morris. Illinois.

VALUES Galore—100 biades 45c, Gross needlebooks 44.80. Automatic cigarette lighters 47.20 dozen, Pullsize 25c Bail Pens 88.40 gross. Bargain Catalog 5001 items free, Cutrate Wholesalers since 1916. Milis Sales Co., 26 West 23rd St., New York.

TAKE Large Unit Orders for Wooi Uniforms, Caps. Shirts, Ties, Wallets, Personal Initiated Buckles With Beits, Cap Badges, 3000 Emblems, Send For Free Outfit Now! Hook-Fast Co., Dept. PS, Roanoke, Virginla.

BUY Wholesale thousands nationally advertised products at big discount. Sent free "The Wholesale Plan." American Buyers' Service, 627-S, Linden, Buffaio, N. Y.

MAKE big money now with marveious new rollt knife sharpener. Big profits, Full or spare time, side line, Protected terri-tory, write today; Alden Speare's Sons Co., 136D Sixth St., Cambridge 42, Mass.

"FOG-Stop" Windshield Cloth, Instantly removes blurry Mist, Prost, Sleet, Snow, Stops windshield fogging, Samples sent on trial, Kristee 153, Akron, Ohio.

BUY Wholesaie—25,000 ltems—Catalog 25c. Matthews, 1472-A1 Broadway, New York City 36.

\$200 WEEKLY. New invention. Amazing 4-second Presto Emergency tire chains, fit all modern auto wheels. National advertising building big demand. 3 sales daily to oil stations, dealers, etc.. make 3200 or more weekly. Territory going fast. Virile Presto Chain Co., P-16, Dos Moines 2, Jowa.

MENI Make extra money in your spare time. No house-to-house canvassing re-turned to the control of the control of the young to the control of the control of the young the control of the control of the control pending on quantity against runs, snage, holes, or replaced free, Rush name gud hose size for simple money making plan. Lowell Wilkin. 20210 Wash. Greenfield. O

SELL New Automatic Floor Waxer. Retails \$2.95. Profit 125%. Write for Guaranteed Sales Plan. Smith Corp., Greenfield 6. Mass.

EARN Big Money Fast! Seli advertising work uniforms to garages, factories, every business! Finest tailoring, fit and fabrics including miracle Orlon! Outfit Free. Topps, Dept. 5410, Rochester, Indiana.

MAKE Extra Money—for yourself, club MAKE Extra Money—for yourself, club walve Christinae, Ail-Occasios eliments when Christinae, Ail-Occasios eliments of riender, and assortments to friends, others, 7 leading 21 card 43,100 boxes, Religious and Stationery, Maykins, Animated Books, Sewing Klis, unusual gifts, Over 150 Hema. Sewing Klis, unusual gifts, Over 150 Hema. For animate or an

CALENDARS, Advertising Noveties, Matches, All styles, including Religious. Varnished, 12 Sheet, Girls, Hundreds of Advertising Noveties, Book Matches, etc. Fleming Calendar Co., Promotional Divi-sion, 6539 Cottage Grove, Chicago 37, Ill.

EXTRA Money! Make up to \$1.00 a box selling amazing value Christmas. All Oxocelling amazing value Christmas. All Oxocelling amazing value Christmas. All Oxocelling amazing value Christmas Coffer. Experience unnecessary. Request Feature samples on Christmas Cards. Stationorey. Naprina and free catalog. New Engiand Art Publishers. North Abington 720-A. Mass.

NOTIN ADMIRON 120-A, MASS.
BARGAINS—Terrific Savings—Job Lots—Close-outs! Also save up to 50% on common to the common service of the common services. The common services of the common services of the common services of the common services. The common services of the common services. The common services of the common ser

SALESMEN. Distributors, fast seiling costume jeweiry direct from factory. Big pleture catalog free. Pickeraft, C-19 Bank, Attleboro, Massachusetts.

ABSOLUTELY Free! Big package actual sample fabrics and style presentation of dresses, lingerle, hoslery, etc. Take orders. Commission big. Send no money. Melville Co., Dept. 7614. Cincinnati 25, Ohlo. Meiville

GET Into Toys! Big Money, Show Free toy-gift line full or spare time. Take orders, pocket juicy profits. Styleco, Dept. E324, Cincinnati 10, Ohio.

SELL new ciothing. Lowest prices. Operate from home, auto, store. Enormous profits. Big catalog Free. S&N, 605-D 12th Place. Chicago 7.

OPERATE "Escalator" OPERATE "Escaiator" Mailorder sys-tem, selling our products or any products. Fastest, most revolutionary mailorder sys-tem known. Write: Selbyco, Decatur 173, Iii.

AGENTS. Very profitable household item to sell with your present line. A sensational seller at \$1. You make 60c. Over 375,000 sold in Midwest. Guaranteed. Free sample to agents. Write Perma-2, 609 Leonard, Waterloo, Iowa.

MAN to earn \$90 week up. Lone needed invention. Advertised Saturday Evening Post. Country Gentleman, Prospects every-processive processive proc

173 W. Madison, Chicago 2. Illinois.
LOOK! High School Seniors Only! 25c
buys 81.50 value of 50 fancy graduation
name cards for exchanging, etc. Your
gold, Offer limited
your class. No order accepted without
school name mentioned. Better hurry
Craticards. Box 235-M8. Pittsburgh 30,
Craticards. Box 235-M8. Pittsburgh 30, Penna

IMMENSE profit seiling products our way, our new Booklet Tells How, Alliance Sales, 568-D, Alliance, Nebraska.

BUY it wholesale, Manufacturers, Distributors, Over 850.000 items, Literature free, Olsen, 1231-B East Third St., Duluth S, Minnesota.

BECKER will pay twenty-five dollars a day for your part time. Becker Paint & Varnish Co.. 1821 Woodside Ave., Bay City, Michigan. P.O. Box 54.

City, Michigan, P.O. Box 54.

SELL Big Money-Maker to Men and
Women. Easy handwork makes fast-sellcompany, Brockton 64. Mass.

MEXICAN Feather Pictures, Sell on sight; 2009, profit! Free details, Sample 20c stamps. (No Colins). Sylvias. Apartado MAN 1. Carpa 3500 month by National

MAN to earn \$500 month up. National Company opening exclusive areas. Puil or part time. \$10 saie earns you \$8.60. Pros-pects everywhere. Write Superior Prod-ucts, Inc., Dept, 104, 3410 Main Street, Kansas City, Mo.

HIGH-GRADE SALESMEN

MAKE Money with fast-seiling Bostonian Skirts, Biouses too, Spare time, full time, Saies Kit Free, Bostonian, 89 Bickford, Dept, R-11, Boston 30, Mass,

ADVERTISING book matches—Cash in on big demand—sell Union Label matches. Cuts for all businesses and political parties—Free powerhouse selling kit—low prices—protection guaranteed or repeat orders—Cash commissions. Superior Match ALUMINUM Awnings big profits. Sci Kramer, 321 So. Anita, Los Angeles 49, Calif.

WRITE 3 Words—Collect \$1.65 on 10-second Demonstration to merchants— necessary of the control of the control of the Prestol—5-color advertising message takes fire—glows like brilliant Neoni-postcard for details—Complete Sales Milks (Free, Maxliume Co. 125 W. Hubbard, Dept. CL-9-8. Chicago 10. Illinois.

EDUCATIONAL &

PIANO Tuning Pays. Learn this profitable profession at home. Our Tonometer and the profession at home of the profitable p

INCREDIBLE! Unprecedented! Look under "Personal"! Bijou, Box 1727-VX, Hollywood 28. California.

Hollywood 22. Camorina.

LEARN Plano Tuning, Repairing—at home in 30 days, Unlimited income. Phonograph recordings, tools and instructions furnished. Write Capitol City Tuning School, Department C-1033, 129 East Michigan, Lansing 16. Michigan.

USED Correspondence Courses and Books sold and rented. Money back guar-antee. Catalog free. (Courses Bought.) Lee Mountain. Pisgah. Alabama.

Lew Mountain, Pisgah, Alabama.
HIGH School—No Ciasses, Study at home. Spare time. Diploma awarded. Write for Free catalog. HBA-17, Warme School. 2527 N. Sheffield. Chicago 14. Ili.

want n. snemeig. Chicago 14. Ill.

WANT A Diesel Job? New Opportunities
to increase income. Higher Pay, More
Money, We can help you Qualify Tools.
Shop method home training. Write today)
Diesel. Tractor, Heavy Equipment Division.
Interstate Training Service, Dept. 2-K.
Portland 13. Oreson.

BECOME a Doctor of Psychology or Metaphysics. Learn secret of contentment, happiness. Win degree of Psychology or Universal Truth, 5153-K N. Clark, Chicago.

MEDICAL Laboratory Technicians in MEDICAL Laboratory Technicians in great demand, we train you in your own home, Catalogue free, Imperial Technical Institute, Box 973-B. Austin, Texas. DIE? Suffer? Look under "Personal"? Bilou, Box V6-1727, Hollywood 28, Calif. Bijou. Box V6-1727. Hollywood 20. Canil.
BECOME AN Accountant. No previous
bookkeeping experience required. We train
you at home spare time. low cost. Ask for
free booklet. "Accounting, the Profession
That Pays." LaSalle Extension University,
a correspondence institution. 417 South
Dearborn Street, Department Hi16, Chi-Dearborn Stree

READING Courses and Books. "The Mysteries." Seif-Unfoldment, Yoga. Meta-physical Philosophy. Theosophy. Catalog free. Jordan's, 1130 Keller Avenue. Louis-

Free, Jordan, 1130 Keller Avenue, Louis-ville 13, Kentucky.

BOOKKEPRIS Increase your earn-land the property of the con-land the control of the con-land of the control of the con-land of the control of the con-land of the control of the con-trol of the con

N. U.

HYPNOTIZE: Free Picture Booklet describes fast, practical course, David Stewart, Dept. 52. Post Office, Maivern, Ontario, Canada.

tario, Canaca.
YOU Por President Of Your Own Credit-Collection Business. Many who answered our ads now have their names on office doors. Franklin Credit. Roanoke 7. Va. WELDING training pays at Hobart Welding School, Box P-1022, Troy, Ohio, VA Contract, Best equipment, Catalog Free. VAContract. Best-equipment. Catalog Free.
LEARN Drugless Healing in six Faith,
divine. Suggrstive lessons. Perfect Satisfaction or Money Refunded. \$1,00 gets
particulars. \$4.00 gets first lesson plus "Old
Indian Health Habits" that may help you
live 100 years. William Cartier, 516½ Carlisle. Chichanati 3. Ohlo.

ilsle. Cincinnati 3. Ohio.
COMPLETE Your High School at home in spare time with 55-year-old school. Texts furnished. No classes. Diplomas. Information bookiet free. American School. Dept. X746. Drexel at 56th, Chicago 37. Iil. TIRED of no money, second rate jobs? Like to start a real career with a lifetime of high salarles? Write me about two growing fields that need men. Ed Howes. National Schools, Dept. 7102, 4000 S. Figueroa St., Los Angeles 37.

Trowling fields that need men.
Trowling Schools, Dept. 7102, 4000 S.
Falcatona Schools, Dept. 7102, 4000 S.
Falcatona S., Los Angeles 37.
BARTENDING and management. American Bartending School, P-334 S. Wabash.
Chicago, Hilitols.
Chicago, Hilitols.
Guide 32 pages, 120

BARTENDER'S Guide 32 pages, 120 recipes \$1.50 Postpaid, Peerless Specialties, Phoenixville 1, Pa.

USED Correspondence Courses and Educational Books Bought, Sold, Rented. Catalog Free, Educational Exchange, Summerville, Georgia.

HYPNOTISM—Homestudy! Dipioma Hypnology Institute, 235 S. Brevard, Charlotte, North Carolina,

PHOTOGRAPHIC Memory developed quickly, easily. Amaze yourself and friends. Course \$2.00. Wm. Lovelady. Jr.. 3859 No. Dorgenois, New Orleans. La.

BECOME a Tax Expert. Details for dime, Murphy, Box 2665-PS, Lakewood, O. dime. Murphy. Box 2665-PS, Lakewood, O. ESTIMATING Building Construction, Home study course. For full particulars write, Quantity-surveyor. 1016 Coolidge Drive, San Gabriel, California.

Drive. San Gaoriei, California.

GET A Gov'i Job! Start high as \$73.00 week. Thousands of secure positions available now. Experience usually unnecessary.

Get Free 32-page Civil Service book showing jobs, salaries, reculrements, sample tests. Write today: Franklin Institute.

Dept. F-22. Rochester. New York. CASH in on coming Income Tax boom.

Become a Tax Expert. Earn \$50 and more
daily preparing Tax Returns spare time.

Experience unnecessary. Free particulars.
Union Institute, Lakewood 3. New Jersey. CURE screwdriver struggles. Detailed instructions 25c. Brush Mechanicai Prod-ucts. 381 N. McMillen St., Portland 12. Ore. ucts. 381 N. McMillen St., Portiano I.2. Ore. BOOKKEEPINO — Teach yourself at home. Complete self-check course only 38.5. Consultation privileges with Certical and the self-check course only 38.5. Consultation privileges with Certical after ten day trial, money refunded. Or send \$50 in coin for special bookkeepin spitude test including grading service. Oklahoma City, Okla.

"HOW To Buy A Used Car." See Automobiles-Classified.

mobiles-Classified HYPNOTISM, Sample lesson Free!
Write Baitimore School of Hypnotism,
Dept. 210A, 4214 Beimar Avenue, Baitimore 6, Md.

CONTESTS

TIE-Breaker picture puzzles exposed. \$2.90. Wenograd, Box 1495, Philadelphia 5. Penna. ONLY sure system, win unicorn tie-breakers, send stamped envelope. Box 1174. Chicago 90. Illinois. HOW To Win Prize Contests, Bookiet 50c, Columbia Mailers, Box 644, Spring-dale, Conn.

\$100.000—CONTESTS. Helpful Books; Services. Inquire. Contests, 13H Earl, Red Bank, New Jersey.

WIN Contest Money! National Contest Bulletin gives many tips. Lists Current Contests. Rules, Qualifier course, etc. Sample 25c, National Contests, 1211-PS Bryden, Cotumbus 5. Ohio.

DETECTIVES

DETECTIVE Training. Phillips Secret Service System, 1917-C North Kenneth, Chicago 39, Ill.

DETECTIVES—Work home—Travel, Experience unnecessary, Detective Particulars free. Write, Wagoner, P-125 West 66th. New York 24.

INVESTIGATE, Be our Associate, we train, Diplomas Awarded, Details 25c. Virginia Detective Agency, Hampton, Va. LANGUAGE OUTFITS

LISTEN, Lean A Language by Linguagphone B. Bone. A Language by Linguage
phone B. Bone. German, Russian, Japanese—any of 29 languages through Natural Linguaphone Conversational Method,
send for Free book. Approved for Veterans'
Training. Linguaphone Institute, 5410
Radio City, N.Y.C.

REWEAVING

\$5.00 HOUR possible, spare, full-time at home. Instructions shipped by recognized authority for no-risk examination. Men-women reweave burns, tears, moth-holes, like new, Free details, Skil-Weave 37A. like new. Free Los Angeles 4.

BUSINESS SERVICE, INFORMATION, NAME LISTS

MAILING Lists, All kinds 1000 \$5.00. Dixle Service. King, N. Carolina. REMEMBER Special Occasions. Send Dates, \$2.00 year. Reminders Service. Box 66. Sta. D. Toronto. Canada.

RAISE capital for any legitimate business. Explain your need. Tucker, 3633
Warder St., N.W., Washington 10, D. C.

LETTERS Remailed, forwarded, 25c. Rates, 20 view-cards, Texas tropical par-adise, \$1.00. Johnson, Box 657, Rio Grande City, Texas,

SPECIAL SERVICES

51

ENGRAVED Metal Address, Returns Lost Articles. 50c Five \$2.00. Box 676, Springfield 1. Massachusetts. Springfield 1. Massachusetts.

ALASKAN remails—Fairbanks. Anchorage. Nome. Ft. Yukon, Your stamped letter remailed 50c. Use airmail. Arctic Remail Service. Box 254. College. Alaska. WE can locate and purchase hard to get items. No item too difficult to procure. War surplus items at bargain prices. Write us for quick action, M. M. Maxweil Co., 422 N. Hart St., Chicago 22. Illimois. Dept. B102.

AUTHORS SERVICE

I Want New Writers to cash checks of \$1 to \$100 offered daily. The easiest way to write for pay. No previous experience necessary Free Details. Saunders M. Cum-mings. 468-15 Independence Bidg., Colo-rado Springs, Colorado.

rado Springs, Colorado.

BEGINNING Writers: Let us show you
How to get \$1 to \$20 checks in your daily
mall doing simple spare time writing. Experlence unnecessary. Details Free. W.
Herweil. 7018 Euclid. Cleveland 3. Ohlo.

ADVERTISING

ADVERTISE: 24 words, 100 Canadian Newspapers, \$5.50, Lists Free, Advertising Bureau, 10511-P Springfield, Chicago 43. Bureau 19511-P Springfield, Chicago 43.
ATTENTION Swappers, Traders, \$3.00
puts your 90 word ad in The Texas
puts your 90 word ad in The Texas
LEARN, Advertising yet practicing
in spare time, Amazingly simple, short-cut
method. No tiresome textbooks, Send for
Free Apitiude test, Dawson System, Box
P-181, Lyndon, Kentucky.

CARTOONING, SIGN PAINTING, CHALK TALKS

"HOW To Make Money With Simple Cartoons"—A book everyone who likes to draw should have. It is free; no obligation, Simply address Cartoonists' Exchange, Dept. 1910-C. Pleasant Hill, Ohio. LEARN Sign Painting at Home, Test Lesson Free. Ben Kerns, Box 812-PS. Greenville, South Carolina,

IF you can do simple, pen lettering you can make to \$4.50 per hour, spare time, operating our sensational, new service in your community, National Artists, 601-C North Marsalis, Dalias 3, Texas,

FREE copy, Cash buyers Galore! "Car-toonists' Market Letter", La Habra, Calif BE A Cartoonists! Taient not required. Learn easily at home. Complete course. Market Guide. \$1.00 Ppd. Kirk's Art Ex-change. Dept. 11-D, 2821 Idalia, E! Paso, Texas CHALK Talks, Laugh Producing Program, \$1.00, Illustrated Catalog 10c, Cartoonist Baida, Oshkosh, Wisconsin,

TYPEWRITERS & OFFICE MACHINES

TYPEWRITER \$22.50. Adders, Dupli-tiors \$12.95. Meier's, 118 Spruce, Wichita Kansas.

TYPEWRITERS, Printing Devices, Office Machines supplies appliances, Dixle Graph, King, N. Carolina.

TYPEWRITER Sale! Adding Machines!
Save up to \$20—New Portables, reconditioned typewriters, Send 10c for catalogues, Apple, 993A Westchester Ave.,
New York 59, N.Y.

RUBBER STAMPS & OFFICE SUPPLIES

BETTER Stamps! 3 lines, \$1.00; Line, c. Catalogue, Johnson Press, Box 6-B, 40c. Catalogue, Jo New York City 26.

PRINTING, MULTIGRAPHING, ETC.

PRINTING-Lowest prices. Free sames. Weeks, 342 Woodycrest, Nashville pies. Wee

DISTINCTIVE Printing, free samples, prices, McDonald, 545 North Oakland, Pasadena 4, California,

1000 BUSINESS Cards \$2.50 Prepaid samples Free. Reliable Print Shop, 907 East Jefferson, Louisville 6, Ky,

100 8½x11 LETTERHEADS, 4 lines, with 100 envelopes, \$2.00. Benneville Printing, Box 1931, Pittsburgh 30, Pa. SPORTSMAN'S Personal Stationery— for Business, Hobby, Glits. Features your name and favorite sport (hunting, fishing, golf, skiing, photography) cleverly, color-rully illustrated. Send 10c for samples, state choice of 2 hobbies. Hobbycraft Stationers, Box 475P, Auburn, NY.

1000 GENESEE Bristol Business Cards-lines \$3.25. William Anderson, Bo 5P, Mountain Home, Tenn,

7 Intes \$855P, Mountain Home, Tenn, \$855P, Mountain Home, Tenn, \$150P, Trinting—Prompt service—Wide selection modern type styles, colors, cuts, Free samples, prices, Wilcox, Nicholls, Ga. \$1000 - \$4,00. 81/x11 LETTERHEADS, 1000 - \$4.00. Convincing samples, D'Yarmett Service, Newark, Ohio.

100 8½x11 LETTERHEADS \$1.00 Post-aid, Envelopes same, Race Printing, Hud-

paid, Envelopes same, Race Printing, Hud-son, New York.

1,000 BUSINESS Cards, \$2.35 postpaid!
Other Printing! Dornfeld, Iron Ridge 24,
Wisconsin. BETTER Printing at lower prices! Try us first! Sutton Printing, Box 853-S, Way-

Georgia. 1000 THINPLATE business cards \$3.95 prepaid. Box 134, Sta. "C." Atlanta, Ga. 1000 EMBOSSED Business cards \$3.5 prepaid, Price list with order, Bernard P. Lefferman, 237 East 87th Street, New York 28, N. Y.

PRINTING OUTFITS, SUPPLIES

DO your own printing. Save money. Simple rules. We supply everything. Print for others; good profit. Raised printing like engraving, too. Have home shop. Details free, Kelsey Presses, V-8, Meriden, Conn. MAKE your own, self-molding, rubber printing cuts. Plexirubber, Argyle 2. Wisc. PRINTING Presses, Type Supplies Lists 3c, Turnbaugh Service, Loysville. Penna. PRESSES, Supplies. Paper catalog 10c. Custom. Box 211-S. Springfield, Missouri.

PATENT ATTORNEYS

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent, John N. Randoiph, Registered Patent Attorney, 207 Columbian Bldg., Washington 1, D. C.

C. A. Snow & Co.—S-427. Snow Buildig. Washington 1. D. C. Registered Pat-it Attorneys. Write for information. ent Attorneys INVENTORS, For "Invention Record" orm, contact Carl Miller, Registered atent Attorney, Woodworth Building. Attorney, New York

New York.

INVENTORS: When you are satisfied that you have invented something of value write me, without obligation, for information as to what steps you should take to secure a Patent. Write Patrick D. Beavers, Registered Patent Atty., 938 Columbian Bidg., Washington 1, D. C.

"INVENTOR'S Guide" free, Frank B. Ledermann, Registered Patent Attorney, 154 Nassau Street, New York.

INVENTORS—If you believe you have an invention, we can make a preliminary search on your invention and advize you read to be a proper of the property of the project your placent Booklet "flow to Protect Your Invention" and "Invention Record" form. No obligation, McMorrow, Berman & Davidson, Registered Patent Attorneys, 143-X Victor Building, Washington 1, D. C.

INVENTORS—Send today for booklet "Patent Protection for Inventors" giving detailed patent information and preliminary steps to take toward patent protection,—also "Evidence of Invention" form. Victor J. Evans & Co., 741-L Merlin Building, Washington 8, D. C.

INVENTORS: Learn how to protect your invention. Special booklet "Patent Guide for the Inventor" containing detailed information concerning patent protection and procedure together with "Record of Invention" form will be promptly formation to the promptly form the prompt of the prom and procedure together with "Record or Invention" form will be promptly for-ligation. We are registered to practice be-ligation. We are registered to practice be-fore the U.S. Patent Office and prepared to serve you in the handling of your pat-ent matters. Clarence A. O'Brien & Harve-Jacobson. Registered Patent Attorneys. 22B-K. District National Building, Wash-D.C. ington,

PATENTS—Irving L. McCathran. 316 McLachlen Bidg., Washington 1, D. C. Registered Patent Attorney.

FREDERICK A. Zoda—Registered Patent Attorney, 202 Kellogg Building, Washington 4 D. C., offers services.

FOR INVENTORS

SEARCHES—Put your patent searches in the hands of a Registered Patent Attended of Agent, as he qualifies to give a comply of Agent, as he qualifies to give a factoring of the patent of

INVENTORS, For "Invention Record" form, contact Carl Miller, Registered Patent Attorney, Woolworth Building, N. Y.

INVENTORS: Without obligation, write for information explaining the steps you should take to secure a Patent on your invention. John N. Randolph, Registered Patent Attorney, 206 Columbian Bidg., Washington 1. D. O.

INVENTORS: If you have an invention for sale, patented or unpatented, write In-stitute of American Inventors, Dept. 30A. 631-E St., N.W., Washington 6, D.C.

INVENTORS! For "Copyright, Design & Patent Guide" contact Mr. Metzlerr, 11 West 42nd, New York 18

INVENTIONS Sold—hundreds of manufacturers need ideas, patented or unpatented, iist free, Invention Bureau, 208-S Clinton, Oak Park, Illinois. INVENTORS-We want to manufacture

patented items made of cardboard or paperboard, Royalty basis. Write Box 1291, Dallas, Texas.

INVENTORS—II you believe you have an invention, we can make a preliminary search on your invention and advise you whether we think it can be patented. Send you whether we think it can be patented. Send Protect Your Invention" and "Invention Record" form. No obligation, McMorrow, Berman & Davidson, Registered Patent Attorneys. 143-W Victor Building, Wash-ington 1.D. C.

PATENT searches \$5.00 including patent copies, 48 hour Airmail service. "Record of Invention" free, Same careful, reliable searches conducted for patent atorneys, Capitol Patent Service, Box 64-5. torneys. Capitol Pate Washington 4. D.C.

INVENTIONS Promoted Patented or Unpatented, Established 1911, Write Adam Fisher Company, 183 Enright, St. Louis, Mo.

INVENTORS: Learn how to protect your invention. Special booklet "Patent Guide for the Inventor" containing detailed information concerning patent protection for the protection of the protection of the promptly forwarded to you upon request—without obligation. We are registered to practice before the own of the protection of the protec INVENTORS: Learn how to protect your

INVENTORS Sell your invention direct to manufacturers. Without obligation write National Patent Sales Co., Dept. L. Box 370. Richmond, Virginia,

"INVENTOR'S Guide" free, Frank B. Ledermann, Registered Patent Attorney, 154 Nassau Street, New York,

PATENT Searches, 85.00, including patent copies. Same reliable search as conducted for patent attorners. Free protection forms, 48 hour service, Patent Service Institute, 945-B Pennsylvania Avenue, Washington 4, D. C.

INVENTORS: Be more certain of a mar-ket for your inventions. Get our iatest survey. What's Needed, describing 200 wanted inventions, for \$1.00. Taren In-vention Service. 6060 Sunset Boulevard, Hollywood 28. California.

PATENT Searches \$5.00. 48-hour service.
Patent Applications and Drawings prepared. Record of Invention forms free,
Write Miss Ann Hastings, P.O. Box 176,
Washington 4, D.C.

SPECIAL Machine Parts, Plastics, Dies, Jigs, Tools; Free Estimate, Immediate Delivery, Harry Smith Speciaities, Box 9378, E, Akron, Ohio.

JOIN The National Inventors Institute, 11 Euclid Ave. Cleveland 3, Ohio. Only 5511 Euclid Ave. Cleveland 3. Ohio. \$5 per year. Write for free literature.

55 per year. Write for free literature. INVENTORS—If you consider your in-vention to be something of importance. Invention to be something of importance, States Patent which gives you the right to exclude others from making, using and Protection for Inventors' outlines steps to take to secure patent protection. Mailed promptly without obligation. Victor 3, promptly without obligation. Victor 3, Patent Attorney, 743-1a, Merlin Building, Washington 6, D. C.

INVENTIONS WANTED

INVENTIONS Promoted, Patented or Unpatented, Established 1911. Write Adam Fisher Company, 183 Enright, St. Louis, Mo. INVENTORS: Hundreds of manufactur-

ers have requested our assistance in locating marketable new products. Complete information, free. Institute of American Inventors, Dept. 30C. 631—E Street, N.W., Washington 4. D. C.

MARKETING Aid—Nation Wide, Patented, patent pending, Booklet free, Market Contacts, 719-B2, Magnoiia, Tupelo, Mississippi.

PROTECT and seil your inventions. Details of our unique 4-point program and itst-of needed inventions free. Inventors Sales. 208T Clinton, Oak Park, Illinois. INVENTIONS Wanted Patented or Pat-ent Pending 21 years experience Promot-ing Inventions. National Service Bureau, 3122 Meramec, St. Louis 18, Mo.

INVENTIONS wanted Patented; unpat-ented. Tremendous Manufacturers lists. Global Marketing Service, 1404 Mitchell, Oakland 1. Calif.

INVENTIONS Wanted, Patented, Pend-ing only, Inventors Patent Exchange, Hartford 1, Conn.

64 MODELS, MODEL SUPPLIES

SHIP and Yacht model fittings: blue-prints, Send 25c for illustrated catalog No. 27—Listing hundreds of items. A. J. No. 27—Listing hundreds of thems. A. J. SHIP Model and yacht supplies, com-plete large 64 page catalogue, 30c. Wm. Wild, 510 E. 11th St., New York City.

LIONEL. American Flyer, HO Trains, and accessories at sensational discounts from nation's largest train stock. Send 25c for catalogue. Northern Hardware Company. Broad & Rockland Streets, Philapany. Broad & Rockland Streets, Philapany. pany, Broad delphia, Pa.

STAGECOACH surrey, horses, 20 kits. Folders 10c. Sample buckboard \$1.00. Tontz' Country Store, Elsinore 9, Caiif. TOYS, Electric trains, model airplanes, boats, race cars, beads, sequins, model and hobby supplies, send 10e for catalog, Northeast Toy And Hobby Center, 4825, Independence Ave., Kansas City, Missouri.

POWER Modeis. Unusual steam, gaso-iine and traction engines, Metals, tools, accessories. Catalog 50c, Charles Cole, accessories. Calif.

LIONEL or American Flyer Catalog 20c. Shannon's, 505-S Franklin, Nutley 10. N.J. BUILD miniature homes with our accurately-scaled materials. Send 22c for book tet and samples. Architectural Model Materials Inc., Dept. S102, 4208 Armitage Avenue. Chicago 39.

STEAM engines, boliers, castings, Catalog 25c, Anton Bohaboy, 2297 Price, Rahway, New Jersey,
WORLD'S Finest Hiustrated Catalog-

WORLD'S Finest Hitustrated Catalog-Handbooks, Raiiroads 84 pages 35c. Airplanes, Boats, Crafts, Hobbies, Toois 60 pages 25c. No Stamps, Print Name. E and H Model Hobbies, Room 80, 130 W. Cheiten Avenue, Philadelphia 44.

Avenue, Finaceppina 44.

1952-53 LIONEL, American Fiyer Catalog illustrated. Trains, accessories from America's largest stock, Building, operating, track layout ideas. New! Different: Send 50c Today (money refunded with purchase). Hobby House Inc., Dept. AX, 806 Huron, Cieveland 15. Ohio.

MODEL rairoaders—New live steam catalogue, 34, 1 inch and 1½ inch scale rough casting and working blueprints, Write 88A High Street. Danvers, Mass. Catalogue is 25c.

HOME CRAFTSMAN

LEATHER, tools, lacing, supplies. Free Catalog, National Handleraft, 199 William St., New York 7.

St., New York 7.

OUR bisgest Leather and Craft Catalory 11 1000's of items. Send 25c (refunded pites. Dept. 101. 348 S. Spring. Los Angeles. California.

90 ALL new full size lawn ornament and novelty patterns, up to 20' high. Only 626 Sep 31. Illinois.

cago 31, Illinois.

"PRACTICAL Painting, Wood Finishing" shows how to get professional results. Furniture finishing, workshop projects. home decorating, Complete Modern brush and spray methods. Tricks you've never seen. Write Home Craftsman, 115-F Worth St., N Y, 13.

LEATHERCRAFT. Copper Tooling. Textile Painting. Beadcraft. Shelicraft. Many other crafts. Big Free catalog shows everything you need. Kit Kraft. 73-73 Meirose. Holiywood 46. Calif.

VIOLINMAKERS, Amateurs, Professionals, Fine tone European wood, materials, supplies, instructions, Tools, Patterns, Illustrated catalogue 10c, refunded, Premier Violin Supplies, Dept. VPS, 430 Scuth Broadway, Los Angeles 13, California.

ATOMIC Saw. Fits 3/4" driii motor. 6" biade cuts 2x4 without turning. Information. Willard's, Canoga Park 102. California.

LEATHERCRAFT. New Stylecraft folder Free. New Kits Illustrated, Flilgree Belts, Billfolds, Purses, etc. Send 25c new catalog, Refunded first order, Apache Leather Co., 2804 East Washington St., Phoenix, Arizona.

WILD Animais! Ancient Locomotives! Six-foot Train! 34 quaity Jigsaw Wali Patterns, 50c! Pauls Plans, 2233A N. 35th, Milwaukee 8, Wisconsin.

100 FULL size Jig Saw patterns up to 20" high, only \$1.00. Pattern Service, Medway 8. Mass.

JIGSAW Owners attention! Start earning money at home cutting out wooden noveities and souvenirs. Write H. Cook, Dept. C. 4407 S. Normal Ave., Chicago 9, Iilinois.

LEATHERCRAFT For Pleasure or Profit, Make easy-to-assemble purses, belts, gioves, woolskin toys. 100 other items for sifts or to sell. Send 10c today for big catalog. Largest Leathercraft tock in U.S. J. C. Larson Co., 820 S. Tripp, Dept. 2554. Chicago 24.

89 FULL size Jig Saw patterns of beautiful shelves, ornaments, toys, noveities, Plus "How, Where to Sell." Only \$1.00. Mastercraft 104S, 7041 Octott, Chicago 31, 1ll.

KNOCKDOWN Cedar Chest. Lumber and Veneers. Free Price List. Giles Co., Brownsboro. Alabama. LEATHER Grab Bag! Direct from tanners. Chock full of seathful pieces. allesses, colors. Have fun. earn money making coin purses, key cases, dozens of other useful items for gifts or sale. Amazing Vatue only \$1, NO C.O.D.*S. Moneypack Vatue only \$1, NO C.O.D.*S. Moneypack South St., 3rd Floor, Boston, Mass. 145 South St., 3rd Floor, Boston, Mass. 169 91 "ORIGINAL Idea", \$16. Saw natures.

South St., 3rd Floor, Boston, Russ. 93 "ORIGINAL Idea" Jig Saw patterns \$1.00, Professional drawing, quality printing. Full size sheives, toys, fawn ornaments, novetties. Waiker Studio, PS10, 4343 Lindell, St. Louis 8. Mo.

TOOLING Copper, Free Instructions, Flock, Tools, Flinishes, Bestcraft, 949 Kenwood, Inglewood, Calif.

FLORIDA Cypress Knees make beautiful lamps, Particulars, photos 25c, Craft-Mart, 316-P West Oakwood, Bucyrus, Ohio.

316-P West Oakwood, Bucyrus, Ohio.
WAX, Candles, formulae, write for prices, American Wax & Supply Co., 2422
Hutchinson, Chicago 18, Illinois.

LEATHERCRAFT Tools. Lacings. H. Byrd. 3408 Montrose Avenue. Richmond. Va. PLANS for remote control non-electronic relay to operate your automatic garage door from your car. \$2.00 cash. M.O. J. Saliger, Box 2776, Hollywood 28, Calif.

SQUAREKNOTTERS: Make beits, handbags, lanyards, dog leashes, etc. Special offer! Beginner's book, catalog and quality cord samples 16c. P. C. Herwig Co. Dept. P41. 121 Sands St., Brooklyn I. New York.

LEATHERCRAFT Tools, Leather Emboxing Plates, Craft Accessories, Dis-Catalogue 10: Louis Jones Engineering Company, 1613 Main, Fort Worth, Texas. LEATHERCRAFTERS: Big liustrate catalog of materiats, tools, itis, 10c. Art's Leather, 411 Joseph Ave., Rochester 5, New York.

Leather, 411 Joseph Ave., Rochester 5, New York.

BUILD artificial fireplace logs, Action unit gives effect of real flames, Make into Christmas displays, homes, clubs. Instructions and action unit (less Bulb), \$2.00, Stewart, Box 31, Indianapolis, Indiana.

tions and action unit (less Bujb) \$2.00 Stewart, Box 31, Indianapoits, Indiana.

TRY Leathercraft, It's new, It's ensy, It's educational. Make your own being the bidlioids, purses, hats, dresses, blouses, from durable low-priced leathers, Fre-Catalog tells how, Tandy Leather, Box 397-D, Tulsa, Oklahoma.

Catalog tells how Tandy Leather, Box 397-D. Tulsa, Okiahoma.

ANYONE can make professional repairs on piastic deatal plates, Complete kit makes many repairs, 24.99, Arrow Laboratory, East Rockaway, New York.

tory, East Rockaway, New York.

TOY patterns, educational, action, unusual, Folder 10c refunded first order, Donart, 1535 North 23rd, Meirose, Park, Ili.

TURN Workshop Into Cash. Send Dime for new 32-page catalog describing hundreds of things to make for fun, profit. Craftplans, 1321-B South Michigan, Chicago 5.

6 BUILD IT YOURSELF

BUILD Your Own "Tractor". Free information, Eitrace D-5, Campionville, Cailf.

SEND for big, new 1953 litustrated catalog that will show you how to turn your spare time into cash—making quick-sell-interpretation of the control of t

GRANDFATHER Clock shoptested plans dollar, Thousands bilt, Kuempei Clocks, Minneapolis 16.

BUILD your own power tools, save 90%, handbook 25c. Robert Fellows, Caiedonia 4, New York, STREAMLINED, Built-in kitchen cabinets fit any kitchen, Hiustrated manua describes designing and construction, Ai for \$1.00. Thombert Company, Newtor 11. Iowa.

11. 10va.
BUILD Inexoens've fast production.
Concrete Block Machine. Motor or hand.
Write. Clyde Lee. Mountain View 1. Okia.
NEED Extra money? Make wishing
wells see Business Opportunities column,
BUILD with Concrete, Fleidstone, Earth,
Movable Form System cuts costs, Construction simplified. Free literature. Smith
PS. Box 36. Eagle Creek, Oregon.

"CONGRETE Block Homes." 32-page booklet, on how to build \$1,00. H. C. Lightfoot, Civil Engineer, Richboro, Penn, CHRISTMAS presents—make your own—60 Patterns, toys, furniture, shetves, novetties, plus 88 page Hobby Book, \$1,00. Cratters of Pine Dunes, Oostburg 9, Wisc. A beautiful, expansible masonry Rancho.

Cratters of Pine Dunes, Oostburg 9, Wise, A Deautillu, expansible masoury Rancho, A Deautillu, expansible masoury Rancho Berton, Fordat dining room; paneled first come, Fordat dining room; paneled first control of the Control of th

SAVE with Monarch mower kits. Write for prices, Monarch, 2008 South Hoibrook Street, Ft. Scott, Kansas.

AUTOMATIC switch for your turn signals, drawings, instructions 50c. Armstrong, Box 4001, Northeastern Station, Dearborn, Michigan,

FREE handbook, build sawmills, block machines, freezers, tractors, scooters, Nichols Company, Purvis 3, Mississippi, FASCINATING Contesting Contesting

FASCINATING Geological Geiger Counter, Easy Instructions \$1.00, Technicraft, Box 1166. Boston 3.

BARGAIN Package—Jr. and adult fullfully furniture patterns—\$2.50 value for \$1.00, Tom Tof Furniture, Box 741, Helena,

MOntana.

87 OLD GOLD, JEWELRY, WATCHES, ETC.

HIGHEST Cash Paid For Old. Broken Jewerry. Gold Teeth, Watches. Silverware, Diamonds. Spectacies, Platinum. Free information, Satisfaction Guaranteed Rose Smelling Company, 29-Y East Madison. Chicago.

JEWELRY making. Send 20c for iliustrated cataiog. Milady-Pair Co., G.P.O. 1328. New York City 1.

RHINESTONES, jewelry settings, cameos, sequins, beads, Send 10c for Iiiustrated Catalog, J& M Noveitles, Dept. CL-4, Griffith, Indiana.

WATCHES Eigin, Waitham, Other Outstanding brands. Expertly reconditioned, priced low for quick, great profits Send for Free catalog. Plymouth Jeweiry, 163-P Canai St., New York 13, New York.

HIGHEST Prices paid for old gold, sliver, piatinum, diamonds, watches, gold teeth, spectacles, Cash immediately, Goods returned if offer unsatisfactory, United Smelting Works, (The Old Reliable), 39-A South State, Chicago 3.

OLD Gold Wanted. Highest prices paid on old or broken watches, diamonds, spectacle frames, dentaj gold and platinum. Cash by return mail, information free on request. Alamo Watch Company. Second Floor, Meirose Building, Houston 2, Texas.

5000 JEWELRY styles, you can easily make yourself—Pins, Earrings, Bracelets, Rings, matched ensembles, Instructions and catalog 10c. Barrys, 126 Ardsley Court, Newark, N. 20

TOBACCO & PIPES

CIGARS—Clear Havana, Handmade, Save 82.001 85.50 for fifty postpaid. Reguiarly 15c. Check or Mo, C.O.D. (you pay charges). Seco Cigars. Rochelle Park 1, N. J. PIPE Smokers Blend private aromatic tobaccos, information free, Cozza Pharacist (2). Pequannock, New Jersey.

CIGARETTES—Roll 200 guaranteed to please for 75c, Particulars free, Pete Mo-berly, Box 865, Owensboro, Kentucky.

FOR THE HOME

PHOTOMURALS for you by mail. Write for details. Photographic Library, RCS Studios, 123 North Wacker Drive, Chi-

"TRUE-To" 1952 Election Souvenir Scroll of Eisenhower, MacArthur or Tru-man, also snappy Truman Song (auto-graphed) Sheet Music Soel Write: "True-To" Souvenir, 1326 R. E. Lee St., Mobile, Alabama.

CHRISTMAS Candles 12 Inch. Any color, 12 for \$1.00 postpald, American Wax & Supply Co., 2422 Hutchinson, Chicago C18.

OF INTEREST TO WOMEN

DRESSES 24c; shoes 39c; men's sults \$4.95; trousers \$1.20. Better used cloth-lng. Pree cat. Transworld. 164-AF Chris-topher, Brooklyn 12, New York.

71 FOR SALE MISCELLANEOUS

NOISE. New ear filter stops loud noises passes ordinary sounds. Protect your hear-ing increase efficiency comfort while working. Not hearing aid, ear-plug, Free details, Ansa Co., 3560B 20th St., San Francisco I. Calif.

100.000 ITEMS Wholesale Sources. Di-ctory 25c. Refundable, Flatwoods, Lees-

HAWAIIAN Sheiis-50 Assorted \$1.00. Aiwin, Puhi, Kaual, Hawail.

WANTED MISCELLANEOUS

SCRAP Mercury (Quicksliver) Tanta-lum—Bismuth—Tungsten, Metallurgical Products Co., Established 1909, 35th & Moore Sts., Philadelphia 45, Pa.

WE buy used plating equipment, Send description, Hollywood Bronze Supply, Dept. RR, 1624 East First Street, Los An-geles 33, Calif.

RAZOR BLADES, SHAVERS

1000 CLEAN. smooth Shaves from one biade! Sensational new stropper hones. Sensational new stropper hones. Sensitional sensitional sensition sensit

TATTOOING SUPPLIES

TATTOOING Outfits, Supplies, Illustrated List 25c, Zelss, 728 Lesley, Rocktrated List 2 ford, Illinois,

DRAWING, SUPPLIES &

DRAFTING and artists' materials cata-log—thousands of items—25c (deductible first \$2 order), Gordon's, 219 Madison. Chicago.

TREASURE FINDERS

TREASURE Hunters! New 11-pound featherweight Model 101 iocator for gold silver and minerals, Money-back guarantee best available. Also Gelger Counters for uranium prospectors, Complete information free. The Goldak Company, 1540 W. Glenoaks Blvd., Glendake I., Calif.

W. Gienoaks Bird., Giendale J. Calif.
WHERE to Search for Buried Treasures (Maps-Pictures), Only \$2. Treasure Press, Dept. P. Crown Point, Indiana.
SELECTIVE metal and mineral detector, Revolutionary design, Distinguishes metals from biack magnetic sands, Readily detects metals under asid water. Free literature, Gardiner Electronics Company, Department 22, 2018 N. Dayron, Phoenix.

Arisona.

TREASURE—M-Scope Gelger Counters—Mineral Locators. Why buy something to be considered by the construction of the con

GOLD, Silver, Metal Detectors. Geiger Counters for Uranium, Mineralights, Sen-sational new fully guaranteed models, None Finer, Information Free, Detectron Co., 5631 Cahuenga Bivd., North Holly-wood, California.

WATCH REPAIRING

WATCHMAKERS'—jewelers' tools, Free instructions, catalog, Bengal Company, Cuiver City, Caiff,

"THE Modern Clock." All about clock repair, 502 pages, 173 illustrations, \$4.95, postpaid, 10-day return privilege, North American, Dept, 22K, 2018 North Ave., Chicago 47, Illinois.

WATCHMAKERS Tools, Materials, Supplies, Repairs, Cataiog, Gaies, Box 1000, Chicago 90, Illinois.

5 ELGIN, Waltham, Illinois, Hampden Gents' wristwatches needing minor re-pairs, \$18.00. Write for prices, B. Lowe, Holland Bidg., St. Louis 1, Mo. watches overhauled \$4.50—Guaranteed, free watch catalog, Berkowits, 1150 Castlehlli, New York 61.

CUCKOO Clocks, Se "Beach's Hobby", 205 land 14. Oregon. Sell, Swap, Repair.

MISCELLANEOUS

RECEIVE mammoth malls, magazines, catalogs! Three months 25c, year 50c, Waddeil's Directory, 341-D East 76th, New York 21. BIG interesting mails three months 25c, year \$1.00, Harvey Teeple, Decatur, Ind. TOYS—Special Discounts—Free Catalog. Kiddleland. Box 115-B. Hollis 23. N. Y

Audieland. Box 115-E. Hollis 23. N.
MEN-Young Men. Does a carefree life of travel to foreign places, adventure and to investigate. No experience necessary for further information write to J. Frederick Whiting. 265 West 23 Street, New York 11.

YOUR name and address on twelve pen-ciis. One Dollar, Special prices to schools, etc. Russell Savage, 6814 Pineway, Hyatts-. Maryland.

LUMINOUS Paint—glows in the dark. Sky blue, yellow, green, green-blue. Indoor and outdoor, Waterproof. Weather-proof. 2 oz. jar \$1.00 postpaid. Nite Glo, Box 490. New Haven 11, Connecticut.

ADULT Noveltles, Asst. \$5.00 uniers. 1305 Wilson, Chicago, \$5.00 express. Tupiers, 1305 Wilson, Chicago, Illinois, LEATHERCRAFT, Everything needed by beginners, advanced hobbyists and professional leatherworkers, Largest stock sional leatherworkers, Largest stock per leathers, top quality caifskins, tools, supplies, kits, Send 10e for Big Catalog, J. C. Larson Co., 820 S, Tripp, Dept. 2555, Chicago 24, Illinois.

YOUR Leather Jacket renovated expert-ly, Free circular, Berlew Mfg. Co., Dept. 7, Freeport, N. Y.

PANNING Gold lesson—Catalogue Beginners supplies, Mining Books, Maps, Were To Go' Free, Old Prospector, Box 792D2, Lodi, Calif:

IMPORTED Coin purse-wailet-keyring. Genuine leather, Perfect gift for a busy lady. Money. keys altogether, Easy to find in her purse, Red. black, brown, green with gold design. Only 33.00 tax included. No C.O.D. Jocaro, Box 1258, South Bend, Indiana.

RETHREAD bolts, Instructions \$1.00. Beorge Stade, Finlayson Avenue, Victoria, 3. C.

MAKE, Sell Artificial Flowers, Corsages, Chenlile Dolls, Jeweiry, Starting kits, Fibre, Leaves, Shellcraft, Rhinestones, Se-quins, Findings, Wholesale Catalog 10c, Profitkrafts, 4508T217 Lorain Ave., Cleve-land 2, Ohio.

TOUTDOOR Tollete, -Cesspoul, Sprict TOUTDOOR Tollete, -Cesspoul, Sprict Touts - Cesspoul, Sprict - Cesspoul, Sprict Faw Faw Odorlets, Tried and proved cit-ective by over 150,000 worldwide custom-ers, Easy, safe, economical to use. Saves or money back, Fostcard brings Free de-tails. Burson Laboratories, Dept, E-59, Chicago 22, Illinois.

BUY vitamins direct. Amazing savings. Catalog free. Matoska. White Bear Lake.

Minn.

SLEEK Black Metal Telephone Stand—
A basic household need! Portable—always

"ji" phone. Holds directory. Wonderful
Christmas gift! Send only \$4.95 each
(postpad) Money-back guarantee. Dey.

Soli. Cieveland, Ohlo.

[PLASTIG Card Schuffler) Schuffles
one to three Decks. Mail one bollar—Fost
Office Box 665, Wheeling. West Virginia.

PERSONAL

DIE? Suffer? Ridiculous! Unique, thrill-ing book presents latest wonder drugs, mi-racle cures, lifesaving knowledge! Free Literature! Bijou, Box V6-1727, Hollywood 28. Calil.

28. Cant.

CONFIDENTIAL information for single people, leading to happiness—romance. Write today! Karl Miles, Ph.D. Director, Personal Acquaintance Service, Inc., 601-G South Vermont, Los Angeles 5. Calif. DETECTIVE'S Opportunities, Detective Particulars free, Write, Wagoner, P-125 West 86th, New York 24.

FSORIASIS Victims: Hopeless? New Discoveryl Free Trial offer, Write Pixacol, Box 7097-S, Cleveland, Ohio.

ducted

MEXICAN Legal Practice Reliably Con-lucted. Box 1736. El Paso, Texas. INCREDIBLE! Unprecedented! Become INCHEDIBLE! Unprecedented! Become mental superman overnight! Floor every-body! No studying! "Memoprop" does your thinking! It's uncanny! Revolutionary! Free Idterature! Bijou, Box 1727-VX, Hollywood 28, Calif.

JOIN National Guild Hypnotists. Details.

JOIN National Guild Hypnotists. Details.

Bypnodies of Massachusetts.

"HOW Can I Find Out?" You Can! Information confidentially developed. Am atter, person, problem. World-wide. Officially licensed. Established 1922. William Herman. 170 Broadway. New York. ANCIENT Secrets, amazing Mastry Les-sons \$1.09, Hinkle Publishers, Dayton, Va.

NEED Gifts? Attractive. Samples Literature free. Schollmeyer, Box Brooklyn 25, New York.

SKINNY? Amazing bodyweight gains re-ported! Proven method builds muscle fast! Details. Cambria. Box 26-B, Cambria Heights 11, New York.

SCALP troubles? Avoid baldness. Free details. S. Viggiano, 6556 Ladson, Pitts-burgh 6, Penna. LETTERS remailed 25c. Also private re-ceiving address. Monthly rates. Shanks, Box 3110-G, San Francisco 19, Calif.

BORROW by mail. Loans \$50 to \$600 to employed men and women. Easy quick Completely confidential. No endorsers, Repay in convenient monthly payments. Details free in plain envelope. Give occupation. State Pinance Co.. 323 Securities Bids. Dept. S-14. Omaha 2. Nebraska.

"INTERESTING Malls"—25c keeps your mall box full three months. Bentz, Desk-H/46, Chatawa, Mississippi.

SURPRISE friends! Pretend visiting California. Scenic cards, with your name, malled to 5 friends, \$1.00, Ray Lago, 476 Lombard, San Francisco, Calif.

MEXICAN Law, General Practice Attor-ney, 1203 Arizona Street, El Paso, Texas, LETTERS remailed, 25c. H. W. Osborne, 525½ La Poblana Rd., Albuquerque, New Mexico.

INFORMATION for single people Human Relations Consultant, Dr. Long. Box 375, Los Angeles 53, Calif. "HOW To Buy A Used Car." See Auto-mobiles-Classified.

PILES! Tormented with the irritation and discomfort due to viles? Write for free important information, Mutal Products, Box 836-P, Cleveland 22, Ohio.

HAPPINESS. Romance. Contentment. Interesting, confidential information sent Free to single persons. Write today. Strone. 2488-PS Concourse. New York 58.



LIQUID GLAZE, Lansing 6, Michigan

GARAGE PORTABLE



VINYL LASTIC

USE IT ANYWHERE!

PLASTIC USE II ANYWHENE:

Goes wherev your car pose o Folds compactly e Keeps rain, now. dust, salt air, sun or sleet away e Protects your car's finish of Durably constructed of vinyl plantic that is long wearing and bettem, helds securely in all kinds of weather e Fits all makes and models e Direct from manufacturer e Enclose check or money order for \$5.75, or sent C.O.D.

10-Doy Money Bock Guorontee

MARDO SALES CORP. 480 Lexington Ave., Dept. G-658 New York 17, N.Y.





and clean, semi-fluid lubricant that stays put. Stops squeakt, prevents rust and corrosion. Works wonders on your car and around your home.

. In handy 35¢ and 95¢ tubes at hardware and auto supply stores.

· Dealers write to LUBRIPLATE DIVISION. Fiske Bros. Refining Co., Newark 5, N. J.

LUBRIPLATE

THE MODERN LUBRICANT

HOW HOMER DEVILLE of NEW EARNED \$6,000.00 last year



B.J. Gilson earned over \$285,551 just 64392
These men followed the sensational Stark over the sense with demonstration of new Home Beautifying, Value Boosting over said ethers with demonstration of new Home Beautifying, Value Boosting of large, profitable Stark order. Added Giant Sank Boy's Fatentied and Trade-Marked Fruit Trees. No experience needed to earn were first day. Everything, including and name of the sense
STARK BRO'S . Box 2903

SET \$798 French DUELING SWORDS of two Once used in deadly combat-naw o Pnol.

exciting sport! Learn right at home. Fun - sofe* - educational. These swords are made of fine blue spring steel, polished metal

AFTER

INC.

hondles, rubber sofety tips. Fencing teoches quick thinking, develops coardination, posture. Since the Middle Ages, Europeons hove enjoyed the sport of dueling. "Now advo-coted by U.S. calleges. Set includes two swords and the backlet, "The Art of Fencina". Special moil order price. YOUR MONEY REFUNDED IF NOT COMPLETELY SATISFIED Send \$2.98 to TECHRITE CORP, Box 12 T, South Pasadeno, Colif

"SURE SHOT GUN CASE TREATMENT" A new proven chemical process that prevents

A new proven chemical process that prevents
It's radically different. The case is treated intreated in the case of the case

guords, turned

Fuscinating Hobby! * Profitable Business! Tourravea he You can grow vegetables, flowers or rare plants WITHOUT SOIL, (Hydroponics) every day of the year. Learn the fast, couplessent way to grow any plant indoors or out. No apperience needed. Realine BIG RETURNS fram a Exitation. pleasant way to grow any plent indoors needed. Realize BIG RETURNS from a li Realize BIG RETURNS from a limited space. Amezing nity for real profits. Send postcard today for free picture awing how others from every state are succeeding in this en field. Act now! Send for complete facts today

DRIVING COMFORT at its best! The New ELECTRIC THROTTLE

CHAS, GILBERT CO., Box 22-S, San Diego 6, Calif,

With Foot Control

The electric throttie ("Speed-selector") sets whatever speed selector") sets whatever speed instantly at a touch on the tos-button, or by applying foot brake-good! Install it yourself. Frice \$17.50, F. O. B. Check or C.O.D. Several state franchises open, Dealer inquiries invited. Give car make, and year.



WRITE FOR DETAILS

& M MFG. CORP., Anderson, Ind





RUILD THIS STREAMLINED, TELESCOPING COMSTOCK TRAILER Complete Biveprint and instructions
ONLY \$2.00
Enjoy camping, hunting, fishing
or touring with all the luxury of
a big trailer in this compact

beauty. Also other models. Information and pictures 10c. Thos. Comstock, Dept. R, 820 N. 17th St., Parsons, Kansas.

Make Money SELLING Eshelman Kulti-Mowers and DOING GARDEN WORK



MAKE YOURSELF!

It's easy. Kit includes all wood parts cut to shape. Material for metallic finish into shape. Material for metallic timish in-cluded. All you need is a penknife. Nine authentic full scale models from which

"COLT .44 FRONTIER" Send 10c in Coin for NEW Illustrated F

O'BRIEN GUNCRAFT, P. O. Box 657, Madison, Wis

Ideal for Color and Black & Whitel TELEPHOTO FOR ARGUS C-3

RELEPHOTO FOR ARGUS C-3
A \$20.00 valuel Screws right into \$9.95
front of Argus CI teres is instantinto \$9.95
front of Argus CI teres is instantinto \$9.95
front of Argus CI teres in the series of the operation of the operati

Similar Telephoto and Wideongle tenses, at the some prices, are available for most other 35mm comeras-Rolery, Kodak 35, Signet, Pony, Argus A2, C5, Mercury, etc. Shipping Cost 25c,

DEVELOPIX, Dept. PS, 35 Maiden Lane, N. Y. 38, N. Y.

SELF-CONTROL STARTS HERE



AND TO RESTORE CAR PERFORMANCE

OIL-CONTROL STARTS HERE

To Stop oil-pumping, replace worn engine connecting rod bearings

It's the level truth, proved by exhaustive engineering re-search—WORN ENGINE BEARINGS CAUSE OIL PUMP-ING!

Here's bow: Normally, main and connecting rod bearings "meter" lubricating oil in the exact amounts the engine needs. Worn bearings let excess oil reach the piston assembly, over-burden the piston rings. The rings were not designed to cope with this situation for very long. Result: The oil burns to carbon, which cakes spark plugs, valves, pistons and rings. Performance goes up in smoke!

one rings a chance to do their own job! Check for worn engine bearings, too. Replace with genuine Federal-Mogul bearings, engineered for the job of oil control. Ask your mechanic!

FEDERAL-MOGUL SERVICE (Division of Federal-Moqui Corporation) DETROIT 13, MICHIGAN

CONTROL OIL-PUMPING

WHERE IT STARTS-REPLACE WITH

OIL CONTROL BEARINGS





POUR CA

Get STRYPEE7 ... the only Guaranteed PAINT REMOVER

Removes All Finishes QUICK

STRYPEEZE is quaranteed to stay wet longer and remove more coats of finish per application. indoors or out, than any other remover. or your money back! Clings to upright surfaces.

HARMLESS to hands


Buy it where you buy paints.

FREE, Send for Folder "How to Remove Paints, etc."

SAYOGRAN



Pint only 75c







GIANT BALLOONS

Gentiles govt, surplus weather & Gentiles govt, surplus weather & Gentiles govt, surplus weather & Gentiles govt, surplus weather & Gentiles govt, surplus governments of the government from coast to coast. Order now at these low prices.

3 Ft. Dia. 39c -6 Ft. Dia. 79c -13 Ft. Dia. \$1.39

"Marksman" AIR PISTOL

It's a target pistol but it looks feets mustice loads and cocks like an army, 45. You can have fun indoors in rumpus room or basement; or out in the back yard or woods. Make it a text of skill and 'tout-it had been an experience of skill and 'tout-it reasons and the state of the skill and the light reasons are stated to the skill and the skill reasons are skill reasons are skill and the skill reasons are skill reasons and the skill reasons are skill reasons.

Calif. residents please add soles last

WAR ASSETS DIV. VOLUME SALES CO. Dept. \$-10-52, 3930 Sunset Blvd., Los Angeles 29, Calif.

Malayan THROWING DAGGER BALANCED TO STICK!

The MALAYAN FIGHTING KNIFE is used for self-defense, killing gome, torget skill. Powerful, lent, occurate weapon. plits 1" board of 30 ft. EASY TO

Freitement Indoors ouldoors. Learn This Sport! Easy

AIVIB Leorn Inis Sports Cosy Charles (Lorent Inis Sports Cosy Charles) (Lorent Inistructions, Beautiful), heavy duly 10" instructions, Beautiful), heavy duly 10" instructions, Beautiful), heavy duly 10" instructions, Beautiful), heavy low charles (Lorent Inistruction), and the company of the control of the cost of th

Crosman Pistol...for accuracy GAS POWERED at dealers Low Cost Shooting write for everywhere catalog indoors or out

CROSMAN ARMS CO., Dept. 46 Rochester 20, N. Y.

LEARN TO THROW THE BOOMERANG A Fascinating Sport

and Unique Gift Flight Tested - Guoranteed to Return Golden Red, Jade Green or Natural with Story and Instructions \$2.00 ea.

CARVED by Postpaid COL. JOHN M. GERRISH 4409-P S. W. Parkview Lane-Portland 1, Ore.

SEND FOR YOURS TODAY

BE A FROGMAN!

Join the new national PROGMAN CLUB to-day. All you have to do is send \$1.00—be sure to include your name and address—and here's what you get:

1) A mislature pour chanse and address—and outers—and on the change of the control of the contro

National Frogman Club

Maple Avenue, Dept. PS-10, Los Angeles 15, Calif.

With DROP-FRONT LEATHER CASE

"IDFAL" EXPOSURE METER

Accurate photo-electric light meter, for perfectly exposed pic-tures. Reads directly in "f" stops,—no calculating. Simple, quick, easiest to use. For all

95 movie and still cameras, regular or color film.

THREE YEAR

AT YOUR DEALER FEDERAL INSTRUMENT CORP. Dept. PS-10 14-02 Broadway, L. I. City 6, N. Y.

OVER 100,000 SATISFIED USERS! "IDE AL"

RANGEFINDER

Precision optical Instrument shows exact distance for perfect focusing and clear, needlesharp pictures. Just look through finder and turn knob until double images come together. Spec- \$ Ify metric or

feet scale. GHARANTEE





TEAR GAS

SURE-FIRE SELLER! REAL THUGS AND THIEVES BEWARE!

Here is gas penil gun have a between the control of Hagen Supply Corp. Dept. A510 St. Paul 4, Minn.

Would YOU Like to Make

That's what Stanley Hyman made selling the amazing new

OVER 11,000 people died in fires last year, and a larger public has been waiting for a practical were kind to has been waiting for a practical were kind to be the job of bulky extinguishers that cost 4 times as much and are 8 times as heavy. Ends fires fast as 2 seconds. Fits in palm of hand. Never corroles. Guaranteed 20 years! Sells for only 33.981

You can make good money showing this new discovery to civil defense workers, owners of homes, cars, boats, farms, etc. and to stores for re-sale. Stanley Hyman reports making over \$1000 a month. H. J. Kerr, \$20 a day. William Wyddallis, \$15.20 a a hour.

Isam Wydallis, \$15.20 an hour. What's the secret of "Presto's" amazing power; It's a new war-born wonder chemical count do be 1.5 to 6 times as effective as chemical contents of other extinguishers on an equal weight basis. Makes possible, for the first time, an extinguisher that is mail, light, and amazingly, flettire. Help supply the demand for this important new discovery. Write for FREE Sales kit. No obligation; no capital for FREE Sales Kit. No obligation; no capital required. But don't put it off. Every day you you would be making. Send postcard or letter (MERITE INDUSTRIES, Inc., Dopt. 1110, 201 East 1 6th 5t., New York 3, N. Y. IN. CANADA: Nope Co., Lad., 371 Down St., Market Sales Sa





Midget "PRESTO"

New Jet Engine Burns Gasoline



Powers Your Models of the Powers Your Models of the Powers Your Models of the Powers o



TO SAVE GA

New, Stewart-Warner

Shows You How . . . As You Drive **Every Mile You Drive!**

Made only by Stewart-Warner! Motor Minder tells you at a glance how to get more miles per gallon ... how to spot engine trouble in advance. Clearly marked, illuminated Motor Minder dial warns against below par performance of spark plugs, carburetors, valves, timing, piston rings, manifold and other troubles. Gives a constant check on engine performance with the same accuracy factory-trained mechanics use in motor tune-ups. Easily attached on instrument panel or steering post. Install yours today.

Now only \$10.95 at Your Local Dealer, or Write:

Instrument Division, Dept. P-102 1840 Diversey Parkway, Chicago 14, Ill.

POWER like this you've never

ride Harley-Davidson's NEW '53 Twin for the thrill of

ADVANCED ENGINE DESIGN



Sensationally new! Another reason why Harley-Davidson continues to lead the field with the newest, smoothest riding, best performing motorcycles in the world. The new '53 Twin sets the pace for thrills with an improved 74 OHV motor . . . a twin that's packed with features that lead the way for the entire automotive industry.

Here's flashing power for swift, fun-packed miles. Tops, too, in comfort, reliability and sleek, streamlined styling. See and ride the sensational Hydra-Glide at your dealer's today. Bring a buddy along. Or send 25 cents for illustrated litera-ture and a copy of the Enthusiast magazine, filled with exciting action pictures and stories.

Harley-Davidson Motor Co., Dept. PS, Milwaukee 1, Wis.

45 degree V-type Overhead Valve Engine — 55 horsepower

The only motorcycle engine in the world with Hydraulic Valve Lifters · Hemispherical Combustion Chambers for maximum performance ● Valve Rotators prevent carbon on valve seats and hot spots on valves Aluminum-bronze cast-in valve seat inserts reduce valve wear and assure proper valve seating



LOOK

The Old FORD Tin Lizzie

laws you got a soft spot in your heart for things of the part rethere to things of the part rethere is now been made into a soft special s

trim. Lifetime Fibergiass shade in gay-incites red color, with black iacling. Brass post.

Oversil height—18 inches
Base size—6 x 9½ inches
A lamp to bring back memorles
and to give pleasure for years
to come: To top it
all—the price is \$9.95





Choice of these 3 other outamobile bases, also available:— 1913 Maxwell passenger touring c body only litustrated

1908 Buick (not illustrated) 1910 Cadiliac

h one of these is siso \$9.95, and is made with same care in reproduction and is the same size. Please mail orders—specify model and number of lamps scantrd (ideal as gifts for newlyscels, for new homes, for wedding anniversaries, for Christmas, etc.), If payment is enclosed, we pay shipping; or send COD, plus shipping costs, Money Back Gwarantee if not fully satisfied and delighted, Order NOW!

HOMECRAFTS, Dept. CL-722

799 Broadway

New York 3, N. Y.

No other work shoes of any make are made of triple-tanned, inner-shell horsehide like...

SHELL OLVERINE HORSEHIDES

That's why Wolverines are buckskin-soft, dry soft, STAY soft . . . yet give you many more miles of wear on any work shoe job.



See your Dealer and Try on Wolverine Shell Horsehides

FREE Wolverine Vu-Riter

It's the very newest in ball point pens and it's yours 100% FREE of cost just for asking us "Who is my nearby Wolverine dealer?" Write today to Wolverine - Box UL-10 - Rockford, Mich.



DYNA-MITE POCKET RADIO POWERFUL! PERSONAL! PORTABLE!

- Covers Full Broodcost Band 550-1600 K.C.
- * Selective Dyno-Coll Tuning
- Batteries and All Ports Fit Within Cose
- Heoring-Aid Bottery Pawered, Lang Life . Tiny Acorn Low Droin Tub
- · Laud Clear Tone
- Over 1,000 Mile Ronge No Antenno Used for
- Local Reception
- No Graund Connections Ever Needed Picture Diogram for Rodio Beginners

"This neatly engineered little KIT was designed to give you o real personal portable radio that you can enjoy anywhere without disturbing others. Use it on camping trips, in bed, in your office or just anywhere. Remember this is not a weak crystal set, it is a POWERFUL VACUUM TUBE receiver that will give you good local and long distance reception. SET less batheries ONLY \$5.99 postpoid! C.O.D. orders occepted with \$1.00 deposit within United States and possessions. If you desire botteries, we can supply them at only \$1.50 per set INCLUDING EXTRA "A" BATTERY or you may obtain them from your local hearing aid concern."

Alnico magnet receiver \$1.25 only, when purchased with KIT. ALL PARTS GUARANTEED.

Order Today at this Unbelievable Low Price! PRECISION ELECTRONICS LABORATORY

DEPT. 1 PLACERVILLE, CALIF

SHOTS

30 Shorts or 20 Long Rifle cartridges-world's largest magazine capacity. Greatest number of sighting combinations available on any rifle.

Just two of many reasons for the tremendous popularity of the 146B.

No sales at factory

Model 146B

22 cal. \$2895

1\$29.95 West

YOUR MOSSRERG DEALER WANTS TO SHOW YOU THIS ONE

And when you see it, note the fine quality, Compare it with the finest!

Send for FREE catalog

26510 St. John St., New Haven 5, Conn.



or ance a week you II like whisek Electric Snover. Its clipper-like blade is designed for oil beards, is definitely less irritating. 110v AC model; no TV or radio interference. See your barber ar dealer. If he cannot supply you, send \$15.95—we pay postage; ar send \$2, you pay balance plus pastage and COD. 10-day maney-back guarantee.



CADET ELECTRIC HAIR CLIPPER CADE LELEVISM AND VALUE OF THE MAN CLIPPED WAS TO MAN COURS hair, removes superfluous hair from legs and under orms. The same fine quality clipper used and sold in many beauty shops. See your shop, or dealer. If you prefer, send \$10.75—we pay postage, or \$2, you pay pastman balance, pastage and C.O.D.

ELECTRO TOOL CORP., Dept. W532-K, Racine, Wis.

for Handy People!

SAVE with Archer Pol-mer-ik 100% pure linseed oil: Refinishes furniture. Antiques. Brings out beauty of wood grain.

USE IT FOR PAINTING. Levels better. Brushes smoother. Lasts longer.

101 WAYS TO USE. Free booklet shows "Handy Uses Around Home".... "How to Paint", and "How to Save".



Archer-Daniels-Midland Co., 604 Roanoke Bldg., Mpls. 2, Minn. 97 POPULAR SCIENCE

COLOR PENC COMPLETELY AUTOMATIC

NEW! SENSATIONAL LIFETIME GUARANTEE \$4.00

JUST DIAL TO SELECT COLOR Red, Green, Yellow, Blue, Black, Orange

The world's only 6-color pencil. Precision built-lewelry crafted. Precision built-lewelry crafted. County to the c mediate delivery.

ONLY

PRICE everything: pencil con-taining col-ored leads.

IDEAL QUALITY GIFT RF AUTIFUL!

postage a

DEALERS INQUIRIES INVITED

MICHAEL PRODUCTS, Dept. S1, 565 Tenth Ave., N.Y. 36 ISOLE MAIL ORDER DISTRIBUTORI



WHEN VISIBILITY IS POOR DRIVE CONFIDENTLY WITH A HULL AUTO COMPASS

• Fog, rain, snow, dark of night hide roadsigns -make driving a headache unless you have a Hull Auto Compass. Hull continually proves the handiest instrument in your car. Write for local

dealer's name, literature. MORE HULLS IN USE THAN ALL OTHERS COMBINED

Beaconlite 161 ULL MFG. CO. P.O. Box 246-E10, Warren, O. STREAMUNE 0 04.96

DOG HITCHES

Model Na. 1-B NOW ONLY \$4.95

Heavy Drop Forge Steel Construction. Strong - Safety-Engineered Reliable

Mode for troilers with up to 2,500 pounds capacity. Fits 11/4" plpe tongue

HAMMER BLOW TOOL COMPANY

Wausau 14J. Wisconsin



Post Paid (when

paid in advance)

REAL LEATHER NAVY HELMET

NO HOOKS, TUBES OR HOLES
Brand new NAVY belmet of rich Cordovan
Brown leather lined with soft warm fleece.
Delachable chin strap. Ideal for flyers, eyclost Govit, \$10.00. Small, medium, large
sizea, Send cash, chk., 25% dep. plus postsize on COD. Money back \$2.00 no. \$2.00 pp.

GRAND-HAWTHORNE SURPLUS 1439 S.E. Grand, Dept. PS10-52, Portland, Ore.

New Low Cost Electric Water Heater Gives You



COLLOID EQUIPMENT Co. Inc. Dept. PS-10, 50 Church Street

LEFAX

POCKET SIZE TECHNICAL DATA BOOKS \$1. EACH

Printed on loose leaf, six hole, $63/4^{\circ} \times 33/4^{\circ}$ bond paper, each book contains about 140 pages of technical data, presenting condensed, accurate and essential data for the student, engineer, technical worker and business man. **Building Constr.**

Architecture
Home Heating
Illumination
Electrician's Data
Builder's Data
Lumber Data

LEFAX

Radio Television & FM Air Conditioning General Math. Math Tables Math Tables Physics Chemical Tables Metals Gen. Chemistry Reinf. Concrete

DEPT. PS-9

Television & FM
Electricity, AC
Electricity, DC
AC Motors and
Generators
Transformers,
Relays, Meters
Hydraulics
Surveying
Mech. Drawing
Machine Design
Machinists Data
catalogs (over 2.

Piping Data Piping Data Surveying Tables Trig-Log Tables Metallurgy Analytic Chem, Highway Eng, Mech. of Materials

Mech. of Materials Pwr. Trans. Mach. Thermodyn. Tbls. & Charts Phys. & Thermo-dyn. Data Phys. & Org. Chem.

Write for FREE catalogs (over 2000 llstings). See for yourself how helpful LEFAX can be to you. Send \$1 for each book, (or \$5 for any six books listed above; to PHILADELPHIA 7, PA.

AS MUCH FUN AS A CIRCUS

Some blow up 3 ft. to 4 ft. Easy to make GIANT CIRCUS ANIMALS
—Instructions included, 4 ft. Ostrich, 35; ft. Girafic, a yard full of
12 kittens, Make a big SANTA CLAUS and a set of REINDER,
FREE with each S2.00 order a genuine balloon squawker. FREE with
each \$3.00 order 50 plastic toya (A Complete Western Rodes). CIRCUS BALLOONS, Dept. PS-10

62 Garth Road, Scarsdale, N. Y.



FIREARMS & SWORDS

You don't want to miss our new thrill-packed catalog. Fascinating background and illustrations of 1300 authentic pieces. Exceptional values in hard-to-find items. For your 120 page catalog #28 simply send 50c to cover postage and handling with your name and address.

ROBERT ABELS, Box PS, 860 Lexington Ave., New York 21, N.Y.





SAVE MONEY

AND TROUBLE WITH-





Come winter you will have to buy some sort of anti-freeze for your car, or else you won't "run." Anti-freeze is expensive. If your radiator or any part of your cooling system is leaking, you will quickly lose your expensive anti-freeze. Put a can of Bowes STOP LEAK in your radiator today and make sure that you will have "smoother motoring" this winter.

Bowes Stop Leak will not clog your radiator. It's Sure . . . SAFE . . . PERMANENT.

YOUR CAR DESERVES THE WINTER SAFETY OF

BOWES RADIATOR CHEMICALS

RADIATOR KLEN-ZUR

Removes rust, scale, lime, oil and grease . . . contains no harmful acid ... gets cooling system clean as new.



RADIATOR RUST-ROUT

Prevents trouble-making rust accumulation in cooling system . . . also lubricates water pump.

DRIVE IN Where You See This Emblem


BOWES

BOWES "SEAL FAST" CORP., INDIANAPOLIS 7, IND.

OCTOBER 1952 93

BOWES

14 Reasons Why **Gets Great Pictures!**



- 1. Contortionist Front
- 2. Interchangeable Lenses
- 3. Double Extension Bellows
- 4. Drop Bed
- 5. Folding Infinity Stops

- 7. Vernier Focusing Scale
- 6. Body Shutter Release with Shutter Selector Control Plane Shutter Speeds
- 8. Ground Glass Focus 9. Open Frame Viewfinder 10. Optical Viewfinder
- 11. Built-in Flash Synch.
- 12. Graflok Back

 - 14. Governor Selector

Speed Graphic (illustrated) has focal plane shutter with governed speeds to 1/1000th. Crown Graphic is identical, but without focal plane shutter . . . and costs less. Both available on terms as low as \$2.50 a week from many Grafley dealers



SEE THE POPULAR CENTURY GRAPHIC TOO!

Lowest priced of the famous Graphics – but with many prize-winning Pacemaker features – including ground glass focus; builtin flash; coated, color-corrected lens and fast shutter. 21/4 x 31/4 ... ONLY \$108.00

Prices subject to change.

| Graflex Inc., Dept. 1: | 20 |
|------------------------|-----------------|
| Rochester 8. New Yo | |
| Please send me detail | |
| Pacemaker Graphics_ | Century Graphic |
| Name | |
| Street | |
| City | |
| County or Zone | State |

ize-Winning Cameral

SAVE 50%-THOUSANDS HAVE ASSEMBLED



27 MODELS

Dinghies, skiffs, racers, inboards, outboards and cruisers. Assemble your awn baat, it's easy, it's fun! All parts pre-cut or pre-

fabricated from finest materials. Get all the facts from our big 24 page catalog. See haw Packaged Boats ore built, how they perform, how exclusive construction features make assembly easy. Includes specifications, performance data plus hardware and paints.

25¢ for NEW 24 PAGE CATALOG CUSTOM-CRAFT - DEPT. 5 - BUFFALO 7, N.Y.

Over 50 modern plans and full size natterns Racing classes, cruisers, inboards, author boots. By famous designers. 6' to 30'. DESIGN CATALOG 35'. Design Catalog and boat building handbook, \$1.00

MARINE MART - DEPT 5 - BUFFALO 7, N. Y.

Any 35mm fan can now own one!

SLIDE PROJECTOR.....\$7.49

What a buy! A streamlined 100 watt projector, stur-dily constructed of stamped metal, with a special of the state of the Bolsey, Pony, Bantam, cfc.) color sildes giant LIFESIES. Bulley, Pony, Bantam, cfc.) color sildes giant LIFESIES.

beaded. portable, tri pod model

30 x 40 PROJECTION SCREEN Customers examining the screen in our store lieving its it really headed? Does the lov clude irpod and screen? But after learning get, they admit that they expected to pay 100 more? Yes, you pay far below wholesale price rate screen, equally suited for movie (Rnm and silde projection, Crystal-headed pyroxliting).

then seem to tend Streem miles and lowers on the carrying hould set for behaved carrying tends (see Streem to the
SPIRATONE, 49 West 27th St., Dept. PS, New York, N. Y.

LIGHTWEIGHT

\$370.00

9.5 hp. 4-cycle. 3-speed. Foot-shift. Over 70 miles per gal. Over 60 m.p.h. Write for free circular.

MUSTANG, Dept. PS 635 W. Colorado, Glendale 4, Catil

FOR PORTABLE, EMERGENCY OR HOME USE

ONAN Electric Plants generate 110-valt, 60-cycle current for homes, farms, cabins and re-sarts beyond the highline. Light-weight, partable plants cut casts, speed work for contrac-tors. Standby plants pratect hospitals, hames, civil defense units against pawer failure. 400 ta 55,000 watts. Gasaline or Diesel-pawered, Priced from \$219.00.





WRITE FOR CATALOG

D. W. ONAN & SONS INC. 6744 UNIV. AVE., S. E., MINNEAPOLIS 14, MINNESOTA

TWO GREAT NEW EXCLUSIVE FEATURES

GIVE THIS HR

.. HIGH PRICED SHOTGUN ACCURACY!



Sheriff Thomas Geary, Leading Franklin County (Mass.) Sportsman Says:

"I've used every kind of shotgun, but this H&R is the first bolt action I've ever been able to hit targets consistently with! That Sighting Dome makes the Gamester sight like my expensive guns; the Vari-Choke gives a really fine pattern."

Gamester" DELUXE

MODEL 349 · 12 or 16 gauge

3-Shot Tubular Action Repeating Shotgun

Now every discriminating shooter can have bolt action shotgun economy with \$3395 superb shooting performance!

Smartly appointed with Monte Carlo stock; fluted comb; forestock finger grooves; rubber recoil pad. Perfect balance, fast, easy handling. See it at your dealer's!

NEW! EXCLUSIVE!

H&R "VARI-CHOKE"

9 different degrees of chokes, cylinder bore to full, with a simple twist! Spring tension keeps choke set. Settings visible for easy reading. Positive stops at both extremes prevent over-choking.



MULNO SIGHTING DOME



Here is a really great advance in sighting accuracy for boilt action shotgans. The Mulno Sighting Dome raises your sighting line above confusion with absolute accuracy augrenteed. Demountable.

Harrington Richardson

FREE Catalog on all H & R rifles, revolvers, shotguns . . . write to

171 Park Avenue · Worcester 2, Mass.

Canadian Subsidiary: H&R ARMS CO., Ltd.,
Prummondville. Quebec

QUALITY ARMS FAMOUS THE WORLD OVER

a Bit about Bite



A "BITE" or snack after a dance, movie, or during a TV show is always fun!




"BITE" in tobacco is never any fun! Prince Albert is specially treated to insure against tongue bite!



Bite's Out_

Pleasure's In

there's more tobacco in every lin



● Once you've tried P. A., you'll never want to smoke any other tobaccol Crimp cut and mild, Prince Albert is treated with the patented* "No-Bite" process to assure you of greater smoking comfort! Whether you smoke a pipe or roll your own, you'll enjoy every puff of P. A.!
**Process patented July 20, 1907

MORE MEN SMOKE

PRINCE ALBERT



Radar-type apparatus may one day come to be used for controlling ball games. Copyright by the Author

HERE is no sport to which science could not make further contributions in the interests of fair play. The various devices used today in athletics have been taken from the "scientific sports"; electrical timing strips, photo finishes and automatic starting were all introduced by motor racing and aviation.

Sport will inevitably become more sci-

OCTOBER 1952 97



We may see starting blocks in which the runner's heels are electrically locked until

entifically technical, more mechanized and less a matter of chance.

The camera, now extensively used for deciding the winner of a race, will be brought into use for giving decisions in other sports where it is considered that the human eye is too easily deceived. It is now possible to produce a photograph that can be examined in a matter of seconds from the finish of a race, and the future rules for football or boxing may demand that a continuous photographic record is made of the contest so that any decision which is challenged can be decided by the camera.

Once it is admitted that it is important to avoid an error in placing men an inch apart at the end of a race, it is essential to decide whether they started at the same moment. The present method of starting is nearly as crude as the old method of timing. We may see "starting blocks" in which the runner's heels are electrically locked until the starting gun is fired so that any possibility of "beating the gun" is avoided.

Already, there are miniature attachments for players and runners who can receive instructions while an event is in progress.

Boxers Will Be Wired

In boxing an electrical machine could register those blows struck below the belt which cause so many disputes. There would be no difficulty in producing such a device and it would not encumber the boxers.

Professional boxing is a sometimes dangerous sport against which educated people will probably revolt. It will be quite simple for scientists to save the sport from extinction and make it much more dependent upon skill. The boxers will have to wear special

THE AUTHOR of this forecast of what's ahead in sports, Prof. A. M. Low, is a distinguished British scientist, inventor and popular writer with an amazing record of making predictions that come true. Twenty-five years ago his first book, The Future, accurately foretold the coming of television, radar, 600-m.p.h. planes, and many other developments now accepted as commonplace. The article on these pages is from his latest book, What's the World Coming To?, published in this country by J. B. Lippincott Co.





the starting gun is fired.

sport in which recording methods are be-

Radar-type apparatus may one day come to be used for controlling ball games. It would not be difficult to provide an invisible "net" that would decide whether a ball in baseball was good or not.

To what lengths the glorification of professional sport will be carried is difficult to forecast. Rapid transport makes it possible to consider "world championships." The tendency is toward a world league.

In the last few decades there has been an enormous increase of public interest in motor racing of various kinds, a sport which is "useful" in a way that cricket and football could never be. Many of the major improvements in cars and motorcycles, such as supercharging, overhead valves and improved fuels, have come as a result of racing and record breaking. The success of a dirttrack rider depends to some extent on his

[Continued on page 290]





REPORT FROM THE



Wilbur Shaw Reports:


Buick Sets New

BUICK has a really hot one coming up -the Skylark. It's the first truly originallooking American convertible since the late Thirties. I think it will launch a brand-new style trend in U.S. car design.

The minute I saw it I said to myself, "There's a sports-car bug behind this job." And I tracked him down. But first let me tell you how this new convertible with the foreign flavor looks and how it feels to drive.


The Skylark I drove is not exactly like the ones that a few lucky sons-a-guns with five or six thousand bucks in their jeans are probably going to be able to buy sometime next year. I took the hand-built pilot model out for a spin. There'll be some changes made.

The pilot model has a white body with red leather upholstery and a white nylon top. It has a 1952 Roadmaster chassis powered by Buick's 170-horsepower, over-

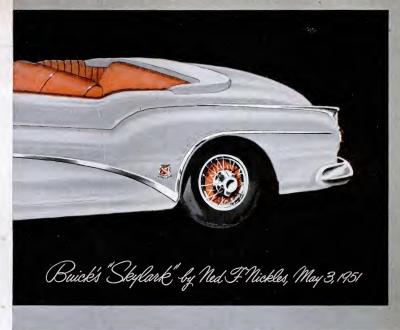

Style for 1953



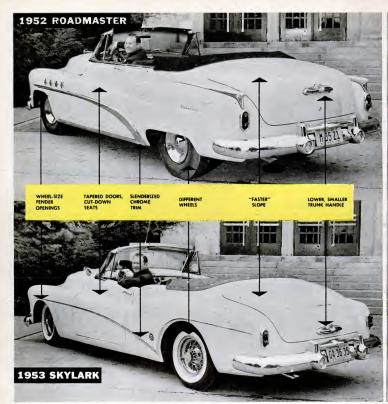

IT WAS FASCINATING TO ME to see how simply, and yet effectively, the 1952 Roadmaster body design was altered to give the pilot-model Skylark its sports-car look. Lowering the body an inch and a half was one of the important changes. Arrows above point out a few others.

head-valve Fireball eight. What it will have if it goes into production is still a well kept secret. I'm going to make a guess or two —but later on.

Only a few changes have been made in the original Roadmaster body design. But what a whale of a difference those few changes make!

The change that first catches your eye is in the doors. They have been cut down

three inches, and their tops follow the slope of the fender line. This single change gives the car European dash. It also makes the rear end look slightly hunched forward, like the rear of a racing car.

Next you notice the wheels—for two reasons. One, they are Rudge wire wheels, which all sports-car fans are nuts about. Two, the fenders have been cut out to show them off fully. These particular wheels came from a little old shop up a back alley in Italy. They cost \$150 apiece and took six and a half months to get.

If the Skylark goes into production, it will almost certainly have American-made wire wheels. They have larger, much shorter spokes than those on the Italian wheels, but they are good-looking, and they are more rugged and a lot less expensive than the imports.

Comfortable Cockpit

The backs of the Skylark's front seats are shorter than those in a conventional convertible. Their tops are flush with the tops of the doors. I liked this as soon as I slid under the steering wheel. My seat gave me all the support I wanted where I needed it, but left me with a good, free-and-easy feeling about my shoulders.

The Skylark has a chummy little cockpit. For once you feel as if the people in the front seats and the people in the back seat are in the same car. The back seat, though lower than normal, is a little higher than the front ones. Whoever is sitting back there has a clear view of the instrument panel which is chrome-plated all the way across. He can also easily talk to the people in front without having to lean forward and hang over their shoulders.

I felt right at home with the bright red, narrow-pleated cowhide that covers the seats and side panels. I had the same kind of upholstery in my racing car in 1937, and I still think it's beautiful. The carpeting is red, too. It's a special needlepoint vulcanized to a sponge-rubber base.

What Would a More Powerful Engine Do?

The whole car has been lowered an inch and a half below the 1952 level. That's all to the good. Actually, there is no real point in having cars as high as they are. The Skylark was let down by shortening its springs. That makes it look racier. It also lets you feel the expansion joints in the road as you cross them. But that's intentional. This is no old matron's automobile. There's a continental crispness in the ride it gives you. That's what the sports-car boys love.

I took the Skylark up to 85 without any trouble, and that got me to wondering what it would be capable of with a more powerful engine. I feel sure it's going to have one. Buicks have had valve-in-head engines for 50 years, and their straight eights have been



"BUCK WAS THE FIRST American car to 'marry' the front fender to the back one," Ivan Wiles told me. "Our taper-through fender line made its debut in 1942." That's the model at top above. "Now we're the first to divorce the convertible from the two-door sedan," he continued. "Except for the tops, they've had the same contours up to now, you know."

Lower picture above is another view of the Skylark. Note how natural it was to taper the doors and thus parallel that fender line.

EXPERIMENTAL BUICKS have a way of developing into production-line models. The top picture below is of a "dream car" that Buick built in 1939, Today's Roadmasters nearly duplicate it in all details except the fender line.

The bottom picture below shows the ultramodern front end of Buick's XP-300, built as an experiment in 1950. If the company uses its flatter, shorter V-8 engine in the 1953 line, the Skylark may go into production as almost a dead ringer for the XP-300.





ITALIAN-MADE WIRE WHEELS now on the Skylark will probably be replaced by American-

built type shown leaning against the car above. It looks better in motion and costs a lot less.

developed to such a high degree that the Buick people probably hate to give them up. But their engineers for four years have been showing what outstanding V-8 engines they can produce. The one they built for the XP-300, for instance, has a compression ratio of 10 to 1 and was designed to develop 300 horsepower. Actually, it pulled as much as 335 on the dynamometer.

The more powerful an engine is, the more power it loses internally, unless at the same time it is made shorter and stiffer This calls for a V-8 engine, which has the additional advantage of being flatter.

So I'll bet you that Buick will modify its experimental V-8 engine for the Skylark, relieving the pressures and cutting back the horsepower to around 180.

Then, with a flatter, shorter engine, the Skylark could be made to look even more unconventional. It would show a closer resemblance to the experimental XP-300.

Shorter Wheelbase with V-8 Engine


Because the V-8 engine is shorter than a straight eight, the Skylark's seats could be moved forward, or its wheelbase shortened, or both. A shorter wheelbase would make the car lighter and easier to park. Moving the seats forward would make the car more comfortable, because passengers would be sitting nearer to the center.

I told you that I guessed there was a sports-car bug at the bottom of the Skylark. He turned out to be Ned F. Nickles, the big, rangy, Wisconsin-born head of Buick's design studio. Ned has owned three MGs—two of the TD series and one TC—and a Siata. The Siata nearly gave him sciatica. He drove 600 miles in it once, all the while sitting in a pool of rain water, and had to stop at 17 garages in the course of the trip. That, as much as anything, convinced him that foreign cars are better to look at than to drive. He's still wild about their lines, though, and feels strongly that lots of Americans would love to own a car that com-

[Continued on page 264]



I'LL BET BUICK'S ENGINEERS will modify the 90degree V-8, 300-horsepower engine they built for the XP-300 and Le Sabre (above) and use it in the Skylark, hinging the hood like this.

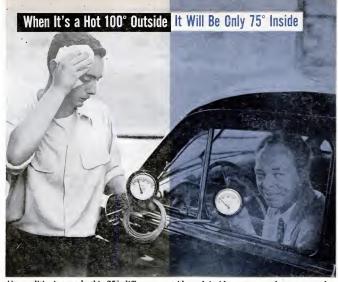

Air conditioning made this 25° difference outside and inside a car on a hot summer day.

1953 Cars Will Have Built-In Air Conditioning

When an egg will fry on the hood, you'll be comfortable inside cooled, ventilated and dehumidified by a small box in your trunk.

By Devon Francis

I T WAS a boiling-hot day. The temperature in the sun was 100°, Inside the car, which had been standing for 10 minutes with the windows closed, it was 115°.

As I slid into the right side of the front seat, alongside a refrigeration engineer, my light summer suit was soaked with sweat.

Then we began to roll. Within a city block the thermometer reading was less


than 100° . In two blocks it was 80° -plus; in four, 75° .

This was a preview of automobile air conditioning—perhaps the same kind you will be able to buy in at least two 1953 cars next summer.

Once the car was cool, a blower running at only half-speed kept it that way. It stayed cool during a 10-minute stop in the hot sun with the engine idling.

The system not only cools the car. It also

OCTOBER 1952 [05

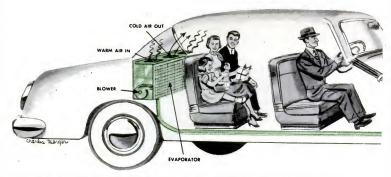

HOW SYSTEM MIGHT WORK on a 1953 car is shown above. Total weight probably will be

power to run it at top speed, less than one

takes the moisture out of the air. Besides the engineer and me, there were two other passengers in the car. Three of us were smoking. Yet the air was clear and dry.

Air-conditioning automobiles is like airconditioning railway coaches and produce trucks. You compress gas. Usually it's dichlorodifluoromethane, known commercially as Freon 12. Then you cool it. That liquefies it. Then you squirt it out, releasing the pressure. When the pressure is released, the Freon borrows heat from its surroundings to become gas again. Ergo: refrigeration.

It Has to Be Small

But air-conditioning an auto is more difficult than air-conditioning a railway car, as engineers of the Chrysler Corp. will tell you.

It was a Chrysler experimental car that I rode in. The company isn't ready to say when it will offer air conditioning for its cars, but General Motors has announced that such systems will be available at extra cost on Cadillacs and Oldsmobiles in 1953. It's a good bet that Chrysler—and Lincoln, too—will be ready to cool their cars the next time the pavements turn hot.

The gimmick in cooling a car is getting a refrigerating unit small enough to fit into a vehicle already pretty crowded with machinery. Chrysler now figures that it has this whipped. Its refrigerating unit is smaller than that in a home freezer.

But size is only part of the problem. A

car is out in the open where the sun beats on it. Its windows admit the sun's infrared (heat) rays. The passengers themselves contribute heat and moisture. And engine heat drifts into the car.

less than 200 lb. It will take about five horse-


That's one of the reasons why air-conditioning units offered by Chrysler, Cadillac and Packard before World War II—yes, they were available more than a dozen years ago—never sold in large numbers. They just didn't have the capacity to handle all that heat. So Chrysler proceeded to beef up its system. It devised a unit with a capacity almost three times that offered before the war.

There was only one problem in getting the machinery into the car. The gas compressor, belt-driven off the engine crankshaft, fitted nicely on top of the block. An evaporator—where the liquid Freon becomes gas again and chills the supply of air to the passengers—and a blower to circulate the air were snugged onto the little shelf at the back of the luggage compartment.

Condenser a Problem

But the condenser was something else again. The condenser is the heart of the whole system. Here's why:

The gas must be compressed from a point where it won't condense to a point where it will—at available air temperatures. Froon 12 at the normal system pressure of 35 pounds per square inch will condense only when its temperature gets down to 38°.



horsepower when it is idling. Six pounds of Freon 12 will be used at a pressure of 180 lb.

Raising the pressure to 180 pounds, however, will make it condense at 130°.

Compressing the gas heats it up some 200°. And it's already pretty warm from the heat it has collected in the evaporator.

That's where the condenser comes in. It has to liquefy the Freon before the gas can start its job of cooling the car. But when the engineers put the condenser in front of the radiator to cool it, the coils blocked off so much air that the radiator son overheated.

They finally solved that one, but just how is a secret.

A Detachable Unit?

Getting rid of the excess moisture in the air ("It isn't the heat, it's the humidity") was a natural. The cold coils in the evaporator chill the air. Chilled air drops its moisture.

That leaves only one problem—the system requires extensive plumbing from the compressor and condenser to the evaporator, and that means a costly permanent installation.

Now a Chrysler engineer thinks he has the answer to that one, too. He wants a package deal, a refrigerating unit that can be bolted into the trunk in 30 minutes and transferred to a new car when a man trades in his old jalopy.

That would mean supplying power to electric motors to turn the compressor and feed air to the condenser. It would require a better electric generating system.

And that may also be in the works. END



COMPRESSOR on Chrysler experimental air conditioner is piston type mounted on engine block and turned by belt from crankshaft. GM will use a rotary type for Cadillac, Olds.



EVAPORATOR, where air is cooled for delivery to car interior, and blower occupy full width of trunk but only a few inches of its depth. No room normally devoted to luggage is used.



COOL AIR comes from vents behind rear seat. Air is one-fourth fresh, three-fourths recirculated to reduce load on cooling system. Control on dash regulates volume delivered.



NO AR ESCAPES when a nail is driven into one of Firestone's new Champion tubeless tires. It leaks out slowly even when the nail is removed. Repair takes only a few seconds with the device at bottom, which forces an aircuring, self-sealing liquid rubber into hole.

1953 Cars

High-priced makes will lead the

By Wesley S. Griswold

NEXT year's models of at least one well known, high-priced American car will come off the assembly lines with a full set of five tubeless tires. That, leading tire makers agree, will start a stampede. They predict that by 1954 you'll be able to get tubeless tires as original equipment on any new car you buy.

A tubeless tire is a casing with an airtight lining. The rim necessarily becomes one wall of the tire. The valve is firmly seated in the rim, with rubber and metal washers holding it in place on both sides and providing the vital air seal.

Goodrich has been making tubeless tires since 1947, Firestone since early in 1951, but until this summer both companies' tubeless tires were premium-priced. In July, these two manufacturers simultaneously announced new models that will be closer to

····· Here's All

ONLY THE VALVE REMAINS, and for tubeless tires it is attached to the rim, as demonstrated below with a cross-section of tire and rim.



Will Have Tubeless Tires

way, setting off a rush to put them on everybody's car by 1954.

the cost of standard tires. U.S. Rubber says that if auto makers want to equip new cars with tubeless tires, U.S. Rubber will be ready. And Goodyear, fourth of the four big tire companies, admits that it, too, has made and tested a lot of tubeless tires.

One of the three major producers of popular-priced automobiles would like to put tubeless tires on his entire 1953 output. He likes the sample that one of his suppliers has offered, and wants to use it. All that is holding him back is this: Can the other suppliers produce a tire that will match it in quality and price, and soon enough?

Four Good Reasons

Why should anybody want to buy tubeless tires?

- The men who design and build them say:

 They are safer than conventional tires.
- They provide a softer ride.
- They keep cooler at high speeds.

• They give up to 10 percent more mileage.

The tires that they are talking about are their latest, lowest priced models—the ones most likely to become original equipment on 1953 cars. They are practically immune to punctures and they're unusually hard to blow out. The reason is their lining, a butyl composition.

Tough, tightly knit, man-made butyl is 10 times as resistant to air seepage as natural rubber. Moreover, in tubeless tires it is vulcanized to the inside of the cord body, where there is no tension on it. When a nail pierces this lining, the butyl does not pull away from the puncture, the way the stretched skin of an inflated inner tube does. Instead, the butyl grasps the nail tightly. Air does not escape unless the nail is pulled out. Even then it takes its time. You could drive for miles with a nail in one of your tubeless tires and never know the difference.

You can blow out a tubeless tire, but


That Is Left of the "Old-Fashioned" Inner Tube

SIX PARTS make the assembly of the conventional valve for tubeless tires (left below) a time-consuming job. One solution offered is

the experimental hard-rubber valve (right below). It has but two parts and is snapped into place mechanically from inside rim.





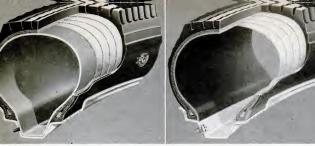

THE INSIDE STORY of the difference between a conventional tire and tube (left above) and a tubeless tire is told in these drawings of two Goodrich products. They illustrate clear-

ly how an inner tube insulates the rim, bottling up heat that in a tubeless tire (right above) can escape through the metal. The latter fact is why tubeless tires run cooler.

not easily. Blowouts usually are caused by a violent pinching of the inner tube when the cord body of the tire is ruptured. This is most often the result of hitting a rock or a pothole at high speed. When such a rupture occurs in the body of a tubeless tire, the butyl lining, being vulcanized to the casing, can't be pinched. At worst, it will crack, thus letting the air out slowly rather than explosively.

The surest way to blow out a tubeless tire is to run it over a section of angle iron, or any other object guaranteed to cut a long, deep gash in it. A badly damaged rim will let the air out of a tubeless tire, but Firestone's testers have repeatedly driven tubeless tires against curbs and similar objects that an average driver might hit without ever knocking the air out of anything but themselves.

Reduced Friction Improves Ride

Almost everyone who has driven on tubeless tires reports that they ride easier. This is despite the fact that they are inflated to the same pressure—28 pounds—recommended for conventional super-balloons. Engineers say it is because inner friction disappeared with the inner tube.

The new tires run cooler at high speeds partly for this reason, partly because they are lighter (by almost the full weight of the average inner tube). But the chief cause of their coolness is the rim, which conducts heat away from the inside of the tire faster than it can when it is smothered by the inner tube of a conventional tire.

Taking the heat out of tires makes them

last longer. The increased mileage promised for tubeless tires also will come from the greater strength that improved carbon blacks, cold rubber and new chemical compounds have given them.

Car makers are going to have to muke certain that the butt welds on their rims are smoother, so that air can't escape by that route. Rims may have to be machined to closer tolerances to provide a tighter seat for tire beads. Assembly-line workers and the staffs of more than 100,000 service stations will have to learn how to install the special valve that tubeless tires now use.

But the enthusiastic prophets who say that tubeless tires for everybody are coming fast brush aside these obstacles as unimportant. They already can see the day when inner tubes will be as obsolete as the solid-rubber tires they replaced.

Do You Remember?

Many early gas buggies retained the horse whip. Came in mighty handy for chasing curious canines away.

In the front-wheel-drive "Electrobat" (circa 1895) the back wheels did the steering. In motion, the vehicle appeared to be advancing to the rear.

One early auto, the Carter "Twin-Engine," carried a spare power plant: if one failed, the other got you home.

1953 Forecast

Automotive Writer, The Detroit News

DIRECT FROM DETROIT

Here is what's being talked of for the new-model automobiles.

BUICK Overdue for restyling, the Buick is going to look a lot different. The hood will be shorter, the visibility better. That new V-8 engine, which but for Korea would have been here a year ago, will replace the famous old valve-in-head straight eight in at least the Roadmasters. The car will have more snap at take-off.

CADILLAC Power brakes are talked of to supplement its power steering. There'll be a new look. And (see p. 105) summer air conditioning by an actual refrigeration unit like that used in offices.

CHEVROLET

Perhaps the biggest news in automobiles—because people automobiles—because people of car—will be a complete overhauling in style, transmission and engine. Chevvy will have a new six to replace the engine that hasn't been changed much in 20 years. The Powerglide automatic transmission will have more oomph when the light turns green. Rumors of a new V-8 refuse to die.

DODGE A new V-8 engine to supplement the sturdy six is an open secret in Detroit. And a new automatic transmission may replace the semiautomatic.

FORD To its overhead-valve six-described by some authorities as the best in its class-Ford is going to add an overhead-valve eight, replacing the L-head that hasn't been changed much since the early 1930s. The new eight just missed '52.

HUDSON A "little" Hudson, not so little as the little cars but littler than the standard Hudsons, will make its appearance in the showrooms. It will be nothing like the Nash Rambler or the Henry J—nor will it be much cheaper than the big-three small cars. It will be a "big-little" car.

LINCOLN Look for both power brakes and power steering. Lincoln, like Chrysler and Cadillac, has been fiddling with air conditioning, but whether it will be added in 1953 is undecided.

MERCURY Like Ford, its smaller brother, this car will have a spanking new V-8 overhead-valve engine.

NASH The Rambler is going to get the works in the styling department.

OLDSMOBILE Power brakes are talked of and may become available.

PACKARD A new, and perhaps simplified, power-steering unit will be added to supplement the power brakes that Packard introduced this year. It's designed to meet the criticisms of existing power-steering systems—a wheel that turns too "fast" and boosters that respond too slowly.

PLYMOUTH The third of the small cars, the Plymouth will be new from front bumper to exhaust pipe. Don't be surprised if it undergoes changes in engine and transmission.

PONTIAC A new V-8 is beginning to emerge. It may take some time before a full view is seen.

STUDEBAKER That snub-nose look to the current Studebaker was a storgap when a shortage of materials forced postponement of complete restyling in 1952. Now, all the changes are planned for '53. An overhead-valve six is on test stands.

Modifications also due in Chrysler, De Soto, the Henry J, Kaiser, the Nash Statesman and Ambassador, and the Willys.

OCTOBER 1952 III



Jeep Scrubs Floors of 14-Acre Garage

ONE man riding this jeep scrubs more than 14 acres of floor in two days in a Los Angeles garage. A gas engine at the jeep's rear turns four brushes at the front while a tank feeds out scrub water. A squeegee behind the rear wheels gathers the dirtied water, which is then sucked up into a second tank. The Finnell System, Elkhart, Ind., makes the scrubber.

Power Jacks Raise Either End of Auto

FLIP a switch on the car at right and you can raise or lower either end of it on a built-in hydraulic jack. The car's two lifts, operated by a motor under the hood, draw up behind the bumpers when not in use. Turning the switch also sets the car's brakes. Vincent R. Paolucci, South Euclid, Ohio, invented the system.



Pen Takes Ink Through 'Straw'

This pen carries a gold "drinking straw" to sip up ink when it needs refilling. The tube pops out from behind the nib when the cap on the top of the pen is unscrewed.

Ink is drawn up as the lifted cap is pressed down, and screwing the cap back on retracts the tube. The mib is never touched by ink. Sheaffer calls the new fountain pen the Snorkel.




Spring Clamps Aid in Gluing

Light gluing operations are made easier with these spring-steel clamps. They can be forced open and snapped onto the work with mounting pliers, leaving the craftsman one hand free to hold the glued part in position. Movable pressure plates on the jaws permit clamping beveled pieces. Georg Ott of Ulm an der Donau, South Germany, makes them in several sizes to take different thicknesses of wood.

Two-Part Rocket to Outfight Fighters

The British believe their newest guided missile is so good that it will make fighter pilots obsolete. Directed by radar beam, or steered by its electronic brain, it can outmaneuver and outfight the fastest fighter planes. It is said to be able to "hunt" a target at 2,000 m.p.h., chasing it as high as 10 miles and rapidly altering course to intercept it no matter how the quarry twists and turns.

Rocket motors on the outique it an added boost at the take-off. They drop off seconds later and the missile continues on, powered by the main rocket motor, which is located inside.

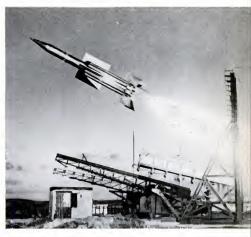



Radar Backstops Watchman

If the gateman above takes his eyes off the road, an "electronic cop" watches for him. The reflector in the window aims a shortwave radio beam down the road. Any object moving in the beam will bounce the waves back to the transmitter and ring a bell. A car sounds the alarm hundreds of feet away; a pedestrian 100 feet away. The system guards the GE Research Laboratory.



75 years ago this month

Popular Science Monthly reported:

"IT IS only with the mouth open that snoring can be accomplished during sleep. It follows that any device which prevents the lower jaw from dropping down, during the relaxation of sleep, and opening the mouth, will prevent snoring. The apparatus represented, which consists of a simple cap, fitting the head snugly, and a piece of elastic webbing, can be made more or less tense as may be required to effect the closure of the mouth."



Triple-Decker to Ferry Cars and Passengers

Redesigned model of Europe's largest air freighter will carry autos in aerial "hold" and passengers in a luxury tail cabin.


A BUILT-IN elevator will raise automobiles to the upper fuselage deck of a new version of the Blackburn Universal Freighter now being built in England. The two cargo decks will hold six to eight cars, depending on size. There also will be room for motorcycles and bicycles at one side of

the lower deck. The upper deck in the tail, reached by a staircase, will accommodate 42 passengers. With this arrangement, it is claimed that the 55-ton plane can carry three times its present payload. The 180-mile-an-hour Freighter can land on and take off from grass fields.



Clamshell doors and loading ramp of the present version of the Freighter are shown below.



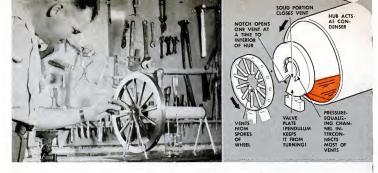

Inventor's Mysterious Motor Runs on Power Drawn from Atmosphere


WHEN Cmdr. Ivan Monk, who designs big turbines for the Navy, is pestered by inventors of perpetual-motion machines, he points to a device on his desk that goes them one better–for it works. It is a wheel that spins with no apparent source of power. Commander Monk built it in his spare time, and patented it, since it may find use in clocks, toys and advertising displays.

Actually it is a rotary heat engine, run by temperature difference between its parts. The wheel is at room heat; the long cloth-covered hub, kept dampened with water, is cooled by evaporation. A low-boiling-point liquid, Freon, circulates between wheel and hub, vaporizing in the wheel and condensing in the hub. Valves maintain an unequal weight of liquid on opposite sides of the wheel—and gravity does the rest, to turn it.

Prospecting Trucks Aid Hunt for Uranium Buried in the Earth




Four trucks like the one at left are speeding uranium prospecting in the western U. S. Backed up to a drill hole, a truck lowers down it a 21/2-footlong steel cylinder with winch, boom and cable. Wires connect a scintillation counter in the cylinder, which detects rays from uranium ores, to an automatic recorder that charts their levels. Built for the Atomic Energy Commission by Bogue Electric Mfg. Co., Paterson, N.J., the trucks save the time of taking and testing core samples.

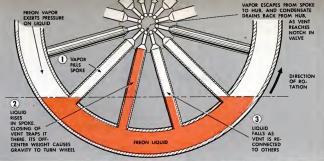

SECRET of mystery motor (at far left with inventor) is revealed above. Spoke nearing bottom fills with Freon liquid, which valve mechanism (left above) briefly traps in it. Resulting excess weight of this spoke turns the wheel.

MOTOR SPINS with no visible power source. Actual source, heat from atmosphere, evaporates water to cool clongated hub acting as condenser. Endless loop of string, dipping in beaker of water, keeps clothcovered hub moistened.



Tool for Blind Drives Brads

INSERT a brad at the tip of this tool (below), and a magnetized plunger holds it. Pressing the handle drives it by extending the plunger against a spring. Wellman Products, Cleveland, makes the tool for the American Foundation for the Blind.



Tune Tells When Wash Is Dry

LAUNDRY automats now play a tune to amnounce that the wash is dry. Commissioned to fit an electric clothes drier with a music box, a Westinghouse engineer devised one whose five tone bars render the air of "How Dry I Am."



OCTOBER 1952 117

Will They ever Climb

The man who came closest gets set to try again this month. Here's why even he doubts that he'll make it.

By Gardner Soule

IF, BY some miracle, you landed by parachute on the 29,002-foot summit of Mount Everest, you would remain conscious, without extra oxygen, about 1½ minutes. With oxygen, you might stay conscious for several hours. But the cold (as low as minus 65°), the winds (up to 150 m.p.h.) and the thin substratosphere

would kill you before you

could get down.

Yet only last May, Ramond Lambert, a Swiss mountaineer, and Sen Tensing, a native Sherpa porter, lived through a night 27,550 feet high up on Everest. They were in a tent but had no sleeping bags. They slapped each other all night long to maintain circulation. The next day they climbed up to 28,215 feet-the highest point on Everest man has reached, and lived.

Lambert could survive up there where you couldn't because his body and mind were acclimatized - that is. gradually adjusted to altitude: by a long, slow climb from sea level. This trip is neces-

sary if you want to live on Everest at all, and that is why you can't drop from a plane or helicopter.

He'll Try the Impossible

Lambert is going to try for the summit again this month. He will try despite the conclusion of the expedition leader that 28,500 feet-502 feet from the top-is the place where body and mind can take no more, and the climber must turn back or die. This is the point, he thinks, of complete exhaustion, even after acclimatization and with oxygen.

His team doctor agrees.

In his determination to try again for the impossible. Lambert is following exactly the reasoning of all Everest climbers:

- It cannot be done.
- We'll try.

Other men besides Ramond Lambert are getting set. Now in the Everest area, making preparations for an attempt to lick the world's toughest peak in May, 1953, is Eric Earle Shipton, an Englishman, who has climbed in the Himalayas for 20 years.

Shipton, known for his reconnaissances, in October, 1951, discovered a new, southern route toward the summit. In the spirit of the Everest tradition, he turned over all his information to Lambert, who has a chance to beat him to the top before Shipton's next try in 1953.



EVEREST CLIMBER whiffs oxygen from tube in sketch of new lightweight equipment. For details, see page 121.

They Know They May Fail

Shipton is as aware of the difficulties as Lambert. He knows that if Lambert fails he himself may be the one to make it. On the other hand, says Shipton,

"there may be another 20 failures." For even with the latest equipment, the


odds still favor failure.

The hazards of climbing five miles up Mount Everest actually start near sea level in Nepal, an independent kingdom in northeast India, where Everest is located. Here you face jungle and disease and heat. And you have a 160-mile trek just to reach Everest, over mountain ranges, down through gorges, along unmarked and un-

Mt. Everest?

British Mosquito bomber skims past cloud-veiled Mt. Everest in this rare view of the peak

Below: Model shows route of Swiss mountaineers who charbed within 800 feet of top last May.

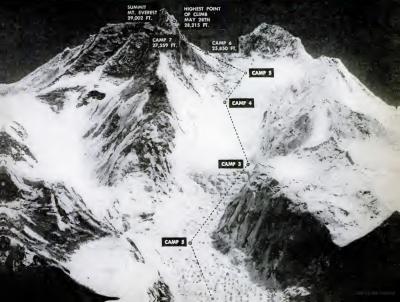

mapped paths. You walk it all. Nepal is

too rugged for horses.

The climate changes from tropic to arctic within 20 miles, as you climb 10,000 feet. At 10,000, at 17,000 and at 20,000 feet you may get mountain sickness (nausea). Each day more men of your party reach their limit and must turn back. After 20,000 feet only a few stay with you.

Himalaya-Abode of the Snow

Around 16,000 feet, higher than the highest peak in the Rockies, you enter the perpetual Abode of the Snow, a translation of the native word Himalaya. As your men fall back, so too do other forms of life. You are getting up where nothing lives.

At about 20,000 feet you are likely to see in the snow the tracks of the last land animal. These are the 12-inch footprints, each with two broad toes and a thumb, of the creature the natives call the Yeti. Almost every Everest climber—there have been about 40, in nine expeditions since 1921—has seen the tracks. Both Lambert and Shipton have. But no man has seen the Yeti.

The Yetis are, some natives say, a race of wild, hairy men, about five feet six inches tall, who live in the snow fields. That the Yetis have not been seen other natives easily explain: you cannot look upon a Yeti and live. Some day an Everest mountaineer may see and identify the Yeti. Meantime, he has been named, by the white man, the Abominable Snowman.

Up Where the Lammergeier Lives

Beyond the dwelling place of the Abominable Snowman, your camps will be visited by a few ravens and crows. Then they too fall back. One living thing still is with you: the lammergeier, the bearded vulture of the Himalayas with his seven- to 10-foot wingspread. He sticks around hopefully till beyond 23,000 feet. Then he too falls behind. Still you must climb, above the lammergeier, that last lifeless mile.

You try the last mile, the longest on earth because no one has reached the end of it and lived, with only the few members of your party who are left. Porters now carry only 10 pounds each. That is one reason why Everest is not likely to be conquered by heavy equipment; men cannot carry it up here, and a primus stove and oxygen are about all a climber can manage.

Your problems now become the greatest of the journey—so great that they have killed



BRITISH EXPLORER Eric Shipton (left) looks over model of Mt. Everest, 10 inches to the mile, based on his discovery of new approach he'll try next spring if Swiss fail this fall.

white and brown men and have forced back everyone they didn't kill. The big, final problems are:

- The mountain itself.
- The weather.
- Your body.
- · Your mind.

Above 24,000 feet Everest presents her own greatest defenses: Ice cliffs as straight up as a battleship's bow. Crevasses that open to show blue-black space for thousands of feet. Loose snow that can trap a man to his armpits. Claciers, always moving, that carry 70-foot icebergs on their surfaces. Ice-falls—avalanches of ice. And ridges, narrow as a knife-edge, along which you must walk.

The very summit, the last 1,000 feet, appears to be simply reddish yellow rock with snow and ice on part of it and the rest kept bare by the constant wind. It looks fairly simple to climb—if you have strength enough left after the ramparts below. But here there is in the air only one-third of the oxygen you get at sea level. Even carrying cylinders of oxygen, your body still almost starves for more.



NEW OXYGEN SUPPLY for Everest mountaineers, sketched by G. H. Davis of Illustrated London News, weighs five pounds, compared to 40 pounds for old apparatus. Climber regulates intake by clenching and relaxing his bite on tube. Struggling up a steep slope at

28,000 feet, he uses four times the volume of airrequired during violent exertion at sea level. On Everest, just existing is violent exertion, and heavy mechanical equipment cannot be brought along. Thus lighter oxygen supply may be deciding factor in attaining peak.

Atop Everest there is no good weather, only bad and worse. The arctic and tropic climates of the area clash continually to produce conflicting winds, storms, monsoons, blizzards. The temperature changes instantaneously. This changes snow conditions. In an instant an avalanche can bury you. In the wind, at night, you and your companions must fight to hold down the tent floor. If it gets under the floor, the wind can hurl tent and contents into a glacier thousands of feet below.

Deterioration Is Rapid

Despite acclimatization, your body deteriorates on Everest's last mile, and the painfully slow race toward the summit is a race between you and deterioration. Deterioration has, so far, always won, as Lambert thinks it will again.

Your arms and legs may become paralyzed. A headache can seem to split, your brain in two. The slightest exertion, like tying a shoe lace, leaves you breathless. Fatigue glues muscles—in a place where to stand still is to freeze to death. Your legs

may collapse under you—in an area where once you start sliding you can go down for miles.

Few men can sleep up here. If you can sleep, without rolling off the slanting rock ledges to drop a mile or two, you wake up feeling suffocated. You lose weight fast. You first cannot eat meat, then you cannot eat anything solid. You are thirstier than anywhere else on earth. An Everest mountaineer once drank 17 cups of tea without moving. You may have diarrhea while your kidneys function once in 24 hours. Dry air is the reason you stop discharging liquid.

Your face and lips turn blue. Your frostbitten fingers stiffen around the handle of your ice axe and must be pried open. Your eyes sink in their sockets. You see double where you must watch every step. You are likely to be blinded by the glare from snow or the rocks if you have to remove your goggles, which you must if they freeze over. One snow-blinded mountaineer had to be led off the mountain before he recovered sight. Getting him down was an incredible feat both for him and his companions. But





on Everest acts of heroism are routine.

Your teeth turn brittle. Your heart enlarges and pounds. You get altitude sore throat, an extremely painful experience caused, like your failure to urinate, by the dry air.

Like your body, your mind becomes another great problem. Despite rapid deterioration of the body, some think the mind goes out first.

You Want to Die

You may get irritable. You can force yourself to be cheerful, but you may have to get a few steps away by yourself and bawl like a baby. You want to die. You may think you are dead. A porter became so convinced he was dead that he refused to move and actually had to be forced down the mountain by his teammates. He argued volubly that he was dead till he had descended a couple of miles.

Your judgment becomes shaky. Your memory fades, Your will power evaporates. Without taking a drink, you get drunk. Shipton says the mountaineer on the upper slopes of Everest is "like a sick man climbing in a dream."

Then all at once you may suddenly have a great surge of pleasant feeling, a belief that everything is going well. At that dangerous moment you are most likely to fail.

"A man who knows how to get to the top

A man who knows now to get to the top may be an expert climber," the mountain men say, "but a man who knows when to turn back is a mountaineer."


When he was 792 feet from the summit last May, going upward at the rate of three steps before each pause for rest, Lambert got this feeling. "I felt magnificent," he said. It was then he knew he had to turn back. He did.

You turn down. There is no relief. In the Alps and on most other mountains one immediately regains strength and sanity after a short descent. You do not on Everest. This is one reason it may be impossible to reach the summit and live: the descent is as fatiguing as the ascent, and the descent may drain away the life that remains in you. Everest takes every dreg of your strength. Only over months can you get it back.

Who climbs Everest? Athletes? No. Truck drivers? No. Stevedores? No. Schoolteachers do. College professors. Army officers. Photographers. Writers. Doctors. Civil servants. Shipton was a British consul. Artists. On the record, it is the poets, the philosophers, the thinkers and the dreamers. Most have been not men of brawn or muscle, but slightly

[Continued on page 262]

Cockpit Takes Off at 760 M. P. H., Parachutes Safely to Earth

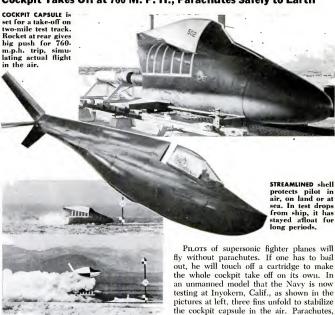

"FLYING" on test track, capsule is ejected by rocket, then unfolds stabilizing fins. Bottom frame of movie strip shows first 'chute blossoming out to slow capsule's fall.

Gas Cap Sticks to Hose

When Ellis Sharp, a gas-station operator of Kansas City, Mo., gets a call to fill 'er up, he puts the car's gas cap on a magnetic holder fixed to the hose. Since it is right under his eve, he can't forget where he laid it or fail to put it back on the car.

fly without parachutes. If one has to bail out, he will touch off a cartridge to make the whole cockpit take off on its own. In an unmanned model that the Navy is now testing at Invokern, Calif., as shown in the pictures at left, three fins unfold to stabilize the cockpit capsule in the air. Parachutes, first a small one, then a larger one, open out to slow its fall, and the sealed and pressurized compartment rides safely down. If it comes down on water, the parachutes are quickly unhooked and a boom holding the plane's storage battery is lowered to keep it upright.

Douglas engineers at El Segundo, Calif., developed the capsule.



'Space Men' Make College Men Think

MIT students design home gadgets for imaginary creatures living on a distant planet.

By Hartley E. Howe

THIS fall some 20 of the brightest students at famed Massachusetts Institute of Technology are designing products for export to the Methanians. This birdlike but intelligent race, as you may not remember, lives on the fourth planet of the star Arcturus, 33 light-years away. As a result, the problems faced by the MIT designers are a little out of the ordinary. For example:

• Everything on Arcturus IV weighs 11 times as much as on earth, because of the great mass of that planet.

• The atmosphere is methane, and the inhabitants use ammonia instead of water.

habitants use ammonia instead of water.
 The Methanians themselves, having evolved from birds instead of mammals, are

built rather like gigantic King penguins. Imaginary People Offer Real Problems

Pretty fantastic? Right out of H. G. Wells or the latest issue of *Utterly Unbelievable Stories*? Don't worry, the learned professors at MIT haven't gone off their rockers from reading too much science fiction. The existence of the Methanians and their planet may be hypothetical, but their part in training a new breed of scientist is very real.

For John E. Arnold, who dreamed up the Methanians, believes that colleges should teach more than the technical skills and analytical ability of a good scientist or engineer. An associate professor of mechanical engineering at MIT, he believes it important to develop the students' ability to think creatively, to see beyond the limits of




NATIVE METHANIAN CHAIRS are straddled because of awkward length of imaginary Methanian's arms and legs. Type at right above has stirrups, is perhaps used as bar stool.

our present achievements. Professor Arnold wants to develop men who can find drastic new solutions to old problems—and discover and solve new problems not yet recognized.

So Arcturus IV and its inhabitants appear in Professor Arnold's course in Product Design for very definite reasons. When a student starts the Arcturus project, he enters a whole new world where it is useless to try to copy the conventional and accepted. He must use his imagination and think creatively whether he wants to or not—or he won't solve his problems.

Equally important, designing for the Methanians forces the student to think about a host of physical factors that we all take for granted when we think about the human race and our familiar earth. Climate, gravity, physical structure, cultural habits—all that must be taken into account.

He quickly learns, for example, to think of weight as an important factor in any tool or appliance. A 10-pound object on earth

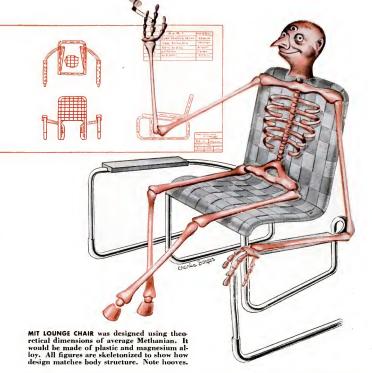

weighs 110 pounds on Arcturus IV. Like kuman beings, the Methanians can lift only about twice their own weight. Since the heaviest Methanians would weigh only about 17 pounds here on earth (187 pounds on Arcturus IV), this limits their tools and utensils to 35 earth pounds.


Life in the 30th Century

The student gathers this information from an impressive collection of photostated letters and memoranda dated 2951, an era when the exploration of outer space has become commonplace. These facts are gathered into a workbook, which opens with a solemn warning from the general manager of Massachusetts Intergalactic Traders, Inc., typed on his own letterhead, that "any per-

son not cleared who reads further in this file does so at their own risk and is subject to the extreme penalty of the law."

From there on, the student finds himself in the world of 2951 A.D. A confidential memo from Massachusetts Intergalactic Traders to Terran Exporting Counsel Headquarters asks for further information about the newly discovered Arcturus IV for use in designing articles to export to that new market. Letters, memoranda and research reports, all on 2951 letterheads, tell how exploring parties visit the Methanians at their great city, Snafu, (pop. 15,500,000), learn their language, study their life and do market research on their needs.

With this to guide him, the student quickly becomes an expert on Arcturus IV. The

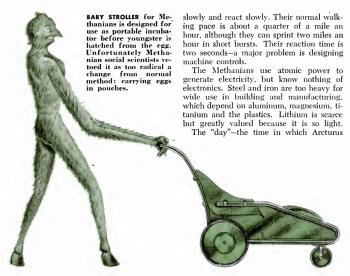

Methanians are so light, for example, apparently because their bones are hollow and are filled with hydrogen or helium. The females are about four feet tall, the males a foot taller.

Bird People Have X-Ray Eye

Their bird ancestry is shown by their long arms, once wings, tipped with two clawlike fingers. Their faces are somewhat like birds, with a nose like a beak. Besides two highly sensitive eyes that can see infrared and ultraviolet as well as ordinary light, a Methanian has a third eye in the middle of his forehead that gives him X-rav vision.

The "reports" reveal that the average winter temperature on Arcturus IV is about 166° F. below zero. Although in summer the mercury climbs to a torrid 58° below, it is not surprising that Methanians have a warm coat of feather-like fur. They wear clothing besides, but their normal body temperature is still about 40° below.

The Methanians have an alphabet, and a number system based on six. They are reported to be patient, intelligent, monogamous and interested in the arts. By our standards, however, they move slowly, think IV revolves once around its own axis—is 159 earth hours long. It takes 2,720 of these days for the planet to complete one trip around its sun, so that one Methanian year equals about 49 of ours. Methanian babies are born in eggs, mature in an Arcturan year and are very old after 10 years. Because of the bleak environment, few reach extreme old age. (Though 490 earth years are not to be sneezed at.)

In general, the Methanian civilization is described as of a "somewhat backward culture—early 20th century." Which in 2951 is going to look pretty backward indeed.

Designs Must Really Work

Fortified with this basic information, the student is commissioned by MIT—Massa-chusetts Intergalactic Traders, of course—to design some machine or household equipment for the Methanian market. Right here, rigid engineering standards take over. The product must be designed to be made with accepted materials and methods, and to work.

So far—the course has only been given one year—the students have confined their projects to equipment for the Methanian household. An MIT chair provides arm supports and a contour shape that lets the Methanians sprawl at ease. Methanians have never had clocks, depending on a system of sound signals to give them an approximate idea of the time. Now a Tech clock has been designed with three dials numbered with the complicated Methanian units.

Machine "Mows" Upside-Down Plants

An MIT kitchen mixer is made with the motor in the base—the average Methanian housewife isn't strong enough to lift a motor arm. A cigarette lighter has a throwaway cartridge of oxygen for use in the methane atmosphere of Arcturus IV.

One of the most complicated of the MIT appliances is a machine that does the work of a lawn mower. In Arcturus IV, vegetation grows downward, taking carbon, silicon and some oxygen from the soil. The roots are in the air, taking oxygen from CO₂, extracting nitrogen and hydrogen, and giving off methane. For their lawns, the Methanians have developed a plant called "Herbivorous carnivorous arnoldious."

To quote a report to the Massachusetts Intergalactic Traders: "There is one serious drawback to the use of this species of lawn

U.S. MARKET is also considered by MIT stu-

dents of product designing. Here are some


[Continued on page 266]

Professor Fathered Methanians



Associate Professor John E. Arnold, above with Methanian mixer design, is the Father of Methania. Trained in English and psychology, he worked in a factory during the depression, became a draftsman by buying a set of tools and sitting up all night with a textbook. Later he did five years' work at MIT in three, became a mechanical engineer.

be produced. Courses emphasize creativity, but designs must be technically practical. Some products are developed by individual students; others are group problems.

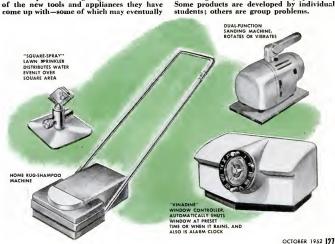

Wingtip Shotguns Fire Rocket Salvo

If A hunter were a superhuman marksman he could use a rifle to down flying ducks. But being human, his aim at a moving target is not accurate enough. So he uses the blanketing effect of a shotgun shell to increase his probabilities of a kill.

For the same reason—that even our latest electronic aiming and firing devices are not accurate enough—the Air Force's newest jet interceptor, the Northrop F-89D Scorpion, fires a salvo of deadly Mighty Mouse rockets from each wingtip with the spreading blast effect of a double-barreled shotgun.

The Air Force will not reveal the effective range of its new rocket weapon, the method of approach and attack, details of

the launching mechanism, or the number of rockets.

But in those twin pods are destructive, folding-fin 2.75-inch Mighty Mouse missiles. One hit by one rocket is all that is needed to send an enemy bomber hurtling earthward in flames, disintegrated by its own bomb load. And kill probabilities are high "since the target area blanketed when all rockets are fired is extensive." The F-S9D, designed for all-weather, day-and-night operations, has a speed in excess of 600 miles an hour and can fly above 40,000 feet.

The Scorpion, weighing more than 40,000 pounds, carries a crew of two: pilot and radarman. But when it comes to the actual shooting, they are along for the ride. They just watch the radar and electronic equipment that picks up the enemy while it is still out of sight, locks onto it, tracks it and adjusts speed and course. Aiming is automatic and an electronic device triggers the rocket-firing mechanism.—Herbert O. Johansen.









BODY BUILDING IN PROGRESS, Broadwell is shown welding a tubular frame that vill connect the unmaded fenders and trunk lid to the chassis.



WIRING, of which there was 250 feet altogether, was completed outdoors. Steering wheel, cut from one piece of aluminum, has a walnut rim.

Hand-Tooled Sportster Built in Basement

ONE of the smartest-looking new cars on the road this fall is a crazy quilt of parts from six other automobiles, ranging in date from 1940 to 1951. Its owner and builder, St. Louis sports-car fan James P. Broadwell (shown above learning over his handsome creation) put it together without help, model or drawings in his basement workshop. The fact that his shop is stocked with \$10,000 worth of looks came in very handy. Fortunately, also, he had had the forethought to provide the basement with a door wide enough to move the car through when it was finished. Building the car took most of his space time for three and a half years and used up about \$83,000 worth of materials.

Starting out with the wreck of a 1942 Studebaker Champion, Broadwell saved only the classis. This he lowered, shortened and reveeleded before clamping to it the front fenders of a 1946 Chevrolet, the rear fenders of a 1940 Buick and the trunk lid of a 1941 Buick. He then built a frame to support the fenders and lid in their proper positions. "The rest of the lines," he says, "just fell in." Broadwell hand-shaped most of the body contours from cold-rolled sheet steel on a homemade

metal-curving machine. He shaped the hood from aluminum.
The engine, which develops around 123 horsepower and can drive the car to 115 miles an hour, is a Broadwell product, too, from the bottom—the original Studebaker block—up. He rebored the cylinders, changed the angle of the intake valves, installed a special canishaft, aluminum cylinder head and two synchronized carburctors.

Broakwell gave his low-slung hybrid a name, too, made up of parts of others. He calls it the Jabro, a combination of letters from his own first and last names.



THE JABRO'S BODY, with its priming coats on here, was continuous-seam welded into a single piece, which was then welded to the frame.



MINUS WINDSHIELD, which Broadwell designed and built from scratch, the Jabro is rubbed down after six costs of lacquer had been applied.



Italian Inventor's Midget Flying Saucer Hits 87 M.P.H.

To prove that a perfectly round plane can fly, Piero Gnesi, an aeronautical engineer of Pisa, Italy, built the model above. He says the 30-inch disk of paper-covered balsa wood flies fine, whizzing along at 87

miles an hour. A special gasoline mixture fuels the tiny motor, and the craft is controlled from the ground with wires. Gnesi, a European model-plane champ, has kept it aloft for nearly three minutes.



I'd like to see them make...

Everyone has his own pet idea of same gadget he would like to see in general use. What is YOURS? Popular Science Monthly will pay \$5.00 for each one published. Use government postcards only. Contributions cannot be acknowledged or returned.



A FIRE EXTINGUISHER, mounted on the inside of the hood of a car, that would go into operation automatically in case the engine caught fire.—Robert P. Hoffman, San Francisco.



A BATHROOM SCALE that would *not* return to zero when you stepped off—so you could check your weight more closely. A push button would put scale back to zero.—*Myron Steir*, *NYC*.



THEATER SEATS WITH HEADRESTS similar to those on a barber's or dentist's chair. You could pull up the headrest, lean back and enjoy the movie.—John Shork, Jewett City, Conn.



A VENETIAN-BLIND AUTO TOP for controlling sunshine, air and visibility. Waterproof when shut, it would be operated by a crank on the dashboard.—Irving Surdam, Winsted. Conn.



A STOVE with heating units that would turn on when a pot was placed on top of the burner—shut off when the pot was removed.—Mrs. Ann Dickinson, Bueng Vista, Ga.



Industry Speeds Production of

Midget Brains for Mechanical Men

Uncle Sam has first call on transistors now, but look for them soon in pocket radios and TVs almost that small.

By George H. Waltz Jr.

A ROBOT chess player that took on all challengers, and generally beat them, had the Nineteenth Century world in a tizzy. All went well until the "machine's" human operator, a midget chess wizard named William Schlumberger, forgot one

MICROSCOPIC WELDING JOB. Cat's-whiskers, no larger than human hairs, are bonded to germanium pellets on GE's transistor assembly line, then embedded in plastic.



day and raised the lid of the box in which he hid.

When the lids are lifted on tomorrow's mechanical men—super-electronic calculating machines, remote-controlled locomotives and automatic factories, you will find no Schlumberger at the controls. In his place will be tiny electronic operators, each the size of a kernel of corn.

They will be transistors. Four years ago these Tom Thumb power amplifiers were laboratory curiosities (PSM, Sept. '48, p.117). Now, although it is still too soon to make full use of their possibilities, the transistors have taken out their working papers and passed a rigid armed services' physical. Uncle Sam wants nearly every transistor that can be made.

Practically Indestructible

Until now only two basic types have appeared. The older design, known as the "point-contact" type, consists of nothing more complicated than three wires attached to a sliver of germanium metal. One model of the second, or "junction," type sandwiches germanium between two thin layers of indium which serve as contacts. In each case the germanium, a unique metal that can be recovered from chimney gases, is used because it has natural rectifying properties, allowing electrons to be controlled much as they are by a vacuum tube.

What has the transistor got to account for the demand? These mighty midgets do

134 POPULAR SCIENCE



CONTRAST IN MINIATURES. Junction transistor takes only twentieth the space of smallest electronic tube (right), and scientists say that future germanium midgets may be smaller.

much of the work of electronic tubes but require no warm-up time, and because they don't heat up, they last much longer than tubes. There is no glass-enclosed vacuum; their elements are simply encased in a plastic jacket, making them practically indestructible.

Work on Flea Power

The energy expended by a flea jumping once each minute would be enough to keep a transistor perking. As a result, they are normally powered by lightweight, longlasting batteries. Sometimes, even light striking a photocell, or the heat of the human body, provides power enough.


It is this, plus the Lilliputian size and weight—20 could fit inside one miniature vacuum tube—which excites the military designers. Imagine every GI carrying a two-way radio inside his helmet, receiving orders through bone-conduction phones, and switching off a throat-type microphone to express his personal reactions.

Better brains for guided missiles, really portable radar equipment, easily concealed beam generators to guide fast attack bombers to their objectives, and even lightweight electronic computers that would tell the brass their chances of victory long before a battle were fought—these are among the intriguing possibilities.



HEAVY BATTERIES ARE ELIMINATED with this transistor-equipped megaphone, which can throw a normal speaking voice a city block. One small dry cell supplies the current.

One of the most intricate electronic "brains" built to date—the IBM selective-sequence computer—occupies three sides of a huge and specially designed hall. In its maze of circuits and relays are 6,000 electron tubes. The heat which they generate calls for air conditioning, and the power demands are enormous. What's more, this super calculator is a temperamental machine, subject to nervous breakdowns every time a tube burns out. But by substituting husky little transistors for the vacuum tubes, the control area could be reduced to less than one-fifteenth of its present area. With space savings like that it is altogether likely

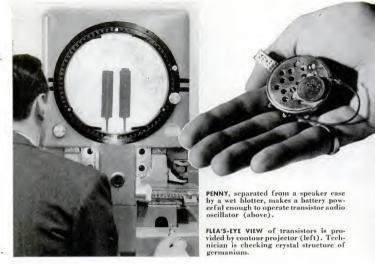

that tomorrow's businessman may add an electronic computer to his desk-top equipment.

Almost completely automatic manufacturing plants with electronic brains making routine decisions and then carrying them out, are envisioned. In that event we can expect to see transistors controlling the machines which will turn out still more transistors.

Featherweight hearing aids even smaller than the postwar models are another possible application for transistors. And in the field of home radios and television sets, we are told to look for pocket-size models which will duplicate the performance of the most modern console chassis. (A transistor radio that you can make yourself is described on page 237.)

Higher Frequencies Sought


There are still problems to be solved, however, before transistors become as common as tubes. One is "noise" (the hissing heard when a radio is turned up loud). Another is frequency. Until a few months ago few experimental transistors could be made to work at frequencies above those

involved in audio circuits. But RCA has just announced that it has boosted the frequency of several units high enough for use in FM radios and TV sets. It is even possible that some day the electronic picture tube might be replaced by a descendant of today's transistor—a simple, long-life unit which will produce the TV image by a flow of electrons in a rugged solid.

What about cost? You can't run down to the local radio shop and pick up a handful of transistors, but Western Electric does sell experimental models for about \$6. Eventually, many technicians believe, the units may sell for as little as a dime.

Quotes

- "We must sit down before facts like a little child, and follow wherever they may lead."—Thomas Huxley.
- "The future of our civilization depends upon the widening spread and the deepening hold of the scientific habit of mind."—John Dewey.
- "By research today we can insure prosperity tomorrow."—Karl T. Compton.

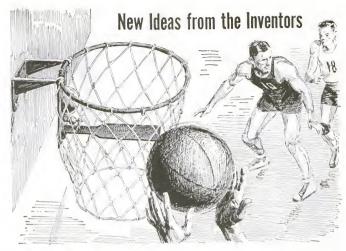

1 Basket to Signal Scores. Neither players nor spectators would be in doubt about close basketball shots if the basket rang a bell. A ball passing through this hoop would depress a paddle and release a spring-

held clapper. Springs would automatically reset the clapper and paddle after each score, holding them poised for the next play. The bell ringer would not be affected by side swipes.



2 Quick-Change Wheel to Clip on Rim. You would only have to pull a lever to free this wheel from its drum. Curved slots in the wheel would slide over grooved projections on the drum. A tapered ring wedged into the grooves would lock the wheel on. The lever would pry the retaining ring out of the grooves to free the wheel.




3 Child's Scissors to Guard Fingers. It would take a determined child to hurt himself on this paper cutter. The scissors would have one conventional blade and one formed as a slot in an oval plate. The narrow slot would admit paper and other thin material but keep out fingers, clothing and the like.

Please turn the page for more new ideas.

OCTOBER 1952 137








7 Drag to Retrieve Ducks. When game is shot down in the water, the aid sketched above would save wading or going after it in a boat. The folded wood frame would be thrown like a javelin. A tug on a line would release a spring to unfold the T-shaped float, which would rake the duck in.

8 Drill to Entertain Kids. Watching dogs or rabbits chase each other along the drive cord of a dentist's drill would help to calm jittery children—and perhaps grownups. To be made of thin sheet rubber and wired to the cord, each toy animal would take the turns around pulleys in its stride.



5 Flashlight to Power Fan. Substituting a small attachment for the lens, lamp and reflector of an ordinary flashlight would provide a pocket-size electric fan for hair drying or just cooling off. A midget motor, powered by the regular batteries, would spin a tiny fan blade within a perforated cover when the light switch was pressed.



6 Dish to Cut Butter. This handy dish of glass or plastic is intended to keep butter in the refrigerator—and then to slice it in the kitchen or at the dinner table. A cutting wire in the hinged cover would make the slices, their thickness depending on how far out the sliding tray carrying the butter was pulled.



9 Curtain to Soften Crashes. A spongerubber mat that would whiz across windshield and instrument panel could save a car rider from injury when hurled forward

in a crash. Springs would eject it when any one of five electric switches, responding both to direct impact and sudden deceleration, actuated a trigger.

Patents an these inventions have been granted to: 1. A. Halmdohl, Kellogg, Iawa; 2. W. Peck, Detrait; 3. W. and G. Stilwell, Vermillian, S. D.; 4. P. F. Calihan, Red Wing, and S. A. Mortenson, Minneapalis, Minn; 5. J. E. Popavich, Ondkand, Calif.; 6. C. W. Paul, NYG, 7. J. D. Caslar, St. Vital, Manitaba; 8. C. J. Gardette, Mikwakee; 9. A. B. Jancas, Detroit.

Super Service for Truckers



This enormous service station for trucks, 112 miles north of Los Angeles, covers 10 acres.

The world's biggest roadside stand for the care and feeding of freight haulers and their drivers grosses \$2,000,000 a year.

A COUPLE of fellows with a shrewd appreciation of human nature have parlayed a towel and a bar of soap into the world's biggest service station for trucks.

If that's stretching the truth a bit, it's only because the towel and soap are first on the list of services supplied to truck drivers who roll into their 10-acre, million-dollar establishment on Highway 99 on the outskirts of Bakersfield. Calif.

Walter Jaynes and Dick Stricklen, the owners, figure that a free bath for their customers is one of their big assets. It's one of the reasons they dispense 200,000 gallons of fuel a month and bank \$2,000,000 a year.

Truckers, dog-tired and dirty, get a bath—and far more.

Take gearjammer Paul Hendricks, He air-brakes his 50-foot-long truck-trailer to a halt between two rows of fuel pumps.

"Gimme the works," he says. "Got to be rolling in a half-hour."


An attendant hands him towel and soap. He points toward the shower room, then in the direction of a spick-and-span coffee shop. As Hendricks steps out, three men jump to their jobs servicing the truck-trailer. Two of them feed 110 gallons of Diesel fuel into tanks on opposite sides of the truck. A third pours five quarts of lube oil into the

OILERS Four grades of lubricating oil are pumped at 150-lb. pressure. Outlets in foreground carry oil, water. Station has two such systems.

CALL BOARD

No need for a trucker to take off empty. Part of service is



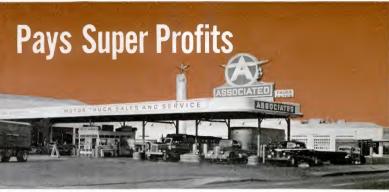

Heated in winter and cooled in summer, it sells fuel and oil, makes repairs, builds bodies.

engine, washes the windshield, brushes out the cab and thumps all the tires with a tire iron to test for flats.

Before Hendricks has completed showering, one of the uniformed attendants drives the big rig over a lube pit, where grease is squirted into the fittings.

Twenty minutes from the time Hendricks spotted the station's neon signs, the rig is ready to roll on. As he unpeels a roll of bills, the night manager says, "I see you're from Florida, Better look at the bulletin board before shoving off."

Bulletin Board Pays Off

At one end of the pump island a notice is chalked on a blackboard: "Load of grapes for Miami." And so Hendricks, who has hauled a load of molasses across the conti-

parts for ailingtruckscan made or supplied from \$100,000 stock.

nent, gets a profitable return load-all for free.

The station, called practically, if unromantically, Motor Truck Sales and Service, is only a little more than seven years old. No longer ago than 1945 Jaynes and Stricklen took note of an interesting facteach 24 hours 2.000 trucks were rolling by Bakersfield, on the main route between Los Angeles and San Francisco. During the peaks of cotton, produce and fruit harvesting, par for the day reached 4,000.

And nowhere on that stretch of highway was there a service station devoted exclusively to trucks.

The partners were savvy. Jaynes had taken over the management of his father's Bakersfield garage when he was graduated from the University of California, Stricklen

Trucks and trailers can be painted by spray-gun method and then constant-temperature oven.



Emergency







This 10,000-gallon, 60-foot butane tank fuels trucks at 40 gallons a minute. vertically to attract attention, it weighs 17 tons.

had sold automobiles-including that mourned vehicle, the Peerless-since the vear 1924.

They mapped a 10-year building program. They bought 10 acres of ground with 600 feet fronting on the highway and optioned 88 more for expansion.

But not one spadeful of earth was turned for six months. The two men took off on a tour of the United States to see how other people serviced trucks. They separated so that they could cover more territory. In all. they visited 150 service stations.

Back home they compared notes. Not one station visited had been laid out specifically for the most efficient handling of big units.

They knew what they had to have: fast, service. a better-than-average restaurant, machinery and tools to repair breakdowns, enough room to drive the biggest truck into any of their buildings without backing to maneuver, free help in getting revenue loads for truckers and-for the drivers-soap and towels.

Room Enough for Everybody

The planning has paid off. Business is booming. In the gas island is a scale that can take a truck 70 feet long. The nearby lube building is cocked 15 degrees toward the fuel island. That's so the longest rigs can go from the pumps to the grease pit without backing up to maneuver. Twin pits are each 70 feet long. Trucks can swing into the other service buildings going away, as the saying goes, and move right out the opposite side following repairs.

On the back lot stands a trouble truck to help truckers-and farmers, too-when they have breakdowns. In a vault are thousands of dollars in cash-customers often want to cash checks.

Nights Are Busy

The \$6,000 a day that goes into the till isn't all from servicing combos. The partners also sell two makes of trucks, farm tractors, cotton pickers and hay balers. And they build bodies. Doors are open 24 hours a day. You can buy gas or gaskets at three in the morning. Most of the business, in fact, is done at night.

The station is known from coast to coast and even abroad, but Jaynes and Stricklen are still looking ahead. By interviewing state engineers, they learned that highways and bridges are being beefed up. That means that bigger trucks and heavier loadsexisting California laws limit trucks to 60 feet and 76,000 pounds on six axles, highest in the U. S.—are coming.

The place on Highway 99 started getting ready for them years ago.

Use of Titanium Saves Chromium

Substituting titanium for stainless steel in one jet engine saves enough chromium to finish the radiator grilles, bumpers and trimmings of 33 automobiles.



Recognize this Chevvy? It's now mostly Olds with parts of an 88 and a 98 fitted in the body.

Olds Makes Old Chevvy New

ONCE upon a time this car was a 1949 Chevrolet—a two-door Styline sedan. Now, \$1,500 later, you can't identify it. But if you scratch beneath the surface of the purple and off-white paint job, you'll find a patchwork of new parts lifted from an 88 and a 98 Olds.

George Cerny of Los Angeles, who makes a business of glamorizing low-priced cars to make them look like what they ain't, did the job. He lowered the top three inches and added three inches to the bottom of the skirt and fenders. The revamped grille includes a '50 Olds top bar and a '51 floating center bar. The lengthened rear fenders are part Chevvy, part Olds 88, and the windshield was swiped from an 88, Most of the Chevvy's chromium trim was eliminated and the new hub caps were specially made.



DECK LID of Chevry has been squared off by reshaping original. Rear fenders are longer.



New Lightplane Is All-Metal

BILLED as the world's first all-metal, single-place flying flivver, the new Honey Bee (above) is 17 feet long, has a wing span of 28 feet, and weighs only 550 pounds. The 65-hp. lightplane is said to take off at 45 m.p.h., climb 1,100 feet a minute, and hit a top speed of 120 m.p.h. Beecraft Associates, San Diego, will also supply the air-frame only and fit it with your own engine.

OCTOBER 1952 143



coot in summer, hot-water heated in winter, the Diesel-crane engineer's cab is comfortable. Controls duplicate those of steam hooks.

The Crane That Saves \$2,000 a Minute

By Henry B. Comstock

WHEN a busy main line is tied up for as much as three hours by a train wreck, any additional delay may set a railroad back as much as \$2,000 a minute in lost revenues.

That is why a modern, high-capacity wrecking erane, which costs as much as a two-unit Diesel engine, three luxury-train diners or four streamlined roomette cars, is considered a sound investment. Brass hats who expect 23-hour-a-day service from their locomotives do not object to footing the bill for this "Big Hook's" maintenance, even if it goes from one year to the next without once hoisting a boxcar out of the ditch.

The "wrecking train" which includes this

BACK ON THE RAIL5 goes a smashed locomotive, lifted by the carefully coordinated efforts of two cranes (drawing shows one in cutaway view to indicate the working parts).

big crane should really be called a re-railing train. It looks like a saw-toothed tramp, with its dingy old crew cars and flatcar loads of replacement parts. But when a terse "W-K" (wreck) signal crackles over the dispatcher's wire, it suddenly becomes a prince in rags, with running rights over all trains, including the road president's private buggy.

You might expect some day to see it roaring over the rails at top speed. But fiction writers to the contrary, it rolls along at a conservative 45-mile-an-hour gait. Anything faster than that would be an invitation to double trouble, for in spite of good design, the hook is an unwieldy machine.

The wreckers rank second only to locomotives in dramatic appeal. Yet public relations' men clam up like a delegation of Russian diplomats when asked about their lines' wrecking trains.

Wrecks Are Too Obvious

As one of them put it when I tried to crawl under the iron curtain of reserve:

"We pay a cockeyed price for running the world's safest transportation system. It all boils down to 'Iron horse bites manthat's news.' As a result, a railroad gets a million dollars' worth of damaging headlines whenever a train takes to the tall corn.

"Even the life-protecting strength of our equipment works against us. You can mop up the worst automobile smash in a matter of minutes. A shattered airplane on a mountain top is hard to photograph. A sinking ship soon disappears. But when our heavy steel cars leave the rails, it may be a couple of days before the wrecking gang gets the

OCTOBER 1952 145



WRECKING CREW CAR provides office, bunks and dining quarters for the wrecking boss

and a crew of 12. From its kitchen come the best meals served anywhere on the railroad.

landscape back to normal. Meanwhile, we have a Cecil B. DeMille extravaganza on our hands, and it's generally strung out for half a mile beside a crowded highway."

I was frankly surprised when he gave me clearance to talk with veteran wrecking boss Bill Tracy. The only stipulation was that I not name the railroad he serves.

Tracy proudly showed me his brand new Diesel crane. It is a robot weight lifter measuring more than 70 feet from its rear coupler to the tip of its lowered boom. A giant which, at the touch of a lever, can just about lift the heaviest passenger locomotive ever built. The railroad's initials are neatly stenciled on it, but you could admire this crane for hours without noticing them.

A Foreman's Dream

I am fairly familiar with steam-powered cranes, but this Diesel was an eye-opener to me. A product of Industrial-Brownhoist, it has practically revolutionized the railroad-crane-building industry. Although this 250-ton-capacity Diesel job was introduced only four years ago, you'd need a special order to buy one of the old flame throwers now. Tracy's explanation is simple.

"This Diesel," he told me, "is a wrecking foreman's dream come true. Time was, and not so long ago, when we kept an engineer puttering around our steam hook all the time —shoveling in coal, cracking up clinkers, patching leaky flues and trying to keep the pipes from freezing in winter. Hard water gave us plenty of trouble, too, even with chemical treatment. Then, when the division switched over to Diesel locomotives, handling coal for the hook became a special problem. But all those standby losses went out the window when we got the Diesel."


"How about starting those big engines on a cold night?" I asked him. "I see you don't keep them idling."

"Easy enough," he grinned. "Notice the plug-in stations on the side of the cab? When the temperature starts to drop we hook them up to a 115-volt power line. One circuit feeds a 500-watt heating unit under the oil pan on each engine. The other goes to a ring heater coiled around the bottom of the fuel tank. That keeps the oil thin, and we can kick a unit over as fast as you can start your car in a heated garage."

Climbing into the operating cab, I saw that the controls differed very little from those found in the earlier steam models. There were the usual levers, wheels and foot treadles. They swing the cab through a complete circle, eliminating turn-arounds: raise and lower the massive boom; hoist any one of four hooks hung at intervals along the upper length of the boom; apply positive braking at the cable drums; and inch the crane along at a three-mile gait when it is operating independently of the wrecking-train locomotive. Even the jack beams -giant telescoping arms which are drawn outward from the frame of the crane car and blocked up with timbers to provide a widened base for the crane when it is hoisting heavy loads-are operated remotely.

TRUCK CAR. Undergear takes a beating in most railroad wrecks. Using replacement units from this flatcar, crane engineers and crewmen can re-truck a boxcar from a freight-train smashup in as little as 20 minutes.





TOOL CAR contains more than 750 items, ranging from a quarter of a mile of rope to

a portable telephone. It is also a mobile machine shop, for making on-the-spot repairs.

But the similarity ended there. The day Tracy showed me this crane, the thermometer outside the vard office hit 90°. In such weather, the heat under the low roof of a steam crane would have been almost unbearable. Yet I noticed little difference in the temperature inside this crane's cab.

My next question was not too bright.

"With a hook like this, and a veteran crew," I said, "how long would it take you to whip the average freight car out of a wreck and set it on a new pair of trucks or on the deck of a flatcar?"

Each Wreck A New Challenge

"That," he told me, "is like asking 'how long is a piece of string?' I've never seen two cars, or two wrecks, which could be handled exactly alike. Sometimes a load is impossible to handle with a direct haul. In that case we bury a heavy timber-a 'deadman,' we call it-deep in the earth, anchor a sheave, or pulley wheel, at its center, and pass a line from the car through the sheave and back to the crane hoist. Getting set for an indirect pull like that takes a lot of time. But you could say we hold the time for most hoists to 20 minutes per freight car.

"Passenger equipment? That's something else again. There you are dealing with expensive stuff, and the brass doesn't like to

have it tossed around."

250-TON CRANE has cab set far back on its bed plate to counterbalance weight being hoisted. Four hooks handle everything from locomotives to divers trapped in quicksand.

"How about locomotives?" I asked the big Irishman. "Seems to me I saw a picture, once, of five cranes hoisting a freight engine out of a gully.'

Cranes Come 400 Miles

"That might well have been our wreck at ," Tracy nodded. "We brought in the hooks for that headache from division points as far as 400 miles away. Took us some time to get a footing of piles and timbers under our outriggers. But when we were finally ready, four hoists, in as many hours, saw that Mallet engine up 50 feet of a 40-degree incline and onto the rails again.

"You might ask why it took five cranes with a combined lifting capacity of 1,250 tons to handle a 300-ton locomotive. The answer is that you can't always have the booms drawn up to their shortest radius and working on a load that is directly un-

der them.

"With this crane, for example, we get our maximum lifting capacity when the main hoist is 17½ horizontal feet from the pivoting point of the cab. When you lengthen that radius to 26 feet-and you don't have to lower the boom very far to get thereits effectiveness is cut exactly in half."

'Do the cables ever snap?" I doubted whether he would answer this one.

[Continued on page 254]


At right below is the idler car, which provides a protecting platform for 30 feet of projecting boom when the crane takes to the road. Shelter at the rear is pint-size caboose.



How Electric Blankets

THE grandpappy of the electric blanket was an electrically heated flying suit that didn't work. There wasn't anything wrong with the suit itself-it was developed during World War I and the planes of that day couldn't provide enough juice to keep it warm.


Extending this idea to blankets may seem like a simple step, but not until 1936 was the first electric blanket offered, to a completely unenthusiastic public. Then came World War II. Millions of electrically heated casualty blankets and flying suitsthat did work-were used, the manufacturers learned some new tricks, and the public's attitude changed. Now the blankets are displayed in a wide variety of types on department-store counters from coast to coast.

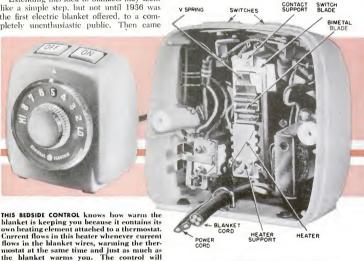

INGENIOUS SAFETY DEVICE to prevent overheating is built into the wire of General Electric blankets. It makes use of the way nylon's electrical characteristics change with temperature: nylon, normally a good insulator, will let some current pass when it gets hot. GE's heater wire (right) has a nylon jacket around which is coiled a "signal wire." If the heater-wire temperature exceeds a safe limit, the nylon jacket's electrical impedance will drop enough to let current leak to the signal wire, and thus to a relay that turns the blanket off.

maintain temperature to within one degree.

At setting 5, it will turn current on if the temperature falls below 71°, shut it off at 72°.




Work


SINGLE-BED ELECTRIC BLANKETS (right) are the most popular size. The fine, highly flexible heater wire lies in channels sewn into the body of the blanket. The channels roughly follow the pattern in the drawing, but they are invisible.

Users are warned not to place the control box near a radiator or an open window, and not to double up the blanket or pile pillows on it, for that will cause it to get unduly hot in one spot and the safety device will shut off the current.

HARMONY IN A DOUBLE BED is possible with an electric double blanket, which provides separate heating circuits and controls for its two halves. There is a slight hitch, though. Whoever handles the master control, shown near the occupied side of the bed below, can shut the current off altogether. The other control is a thermostat only.


One of the main advantages of an electric

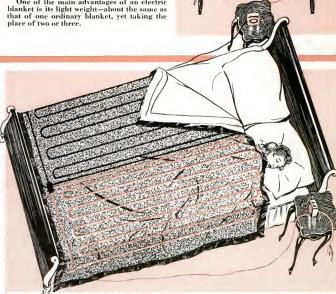

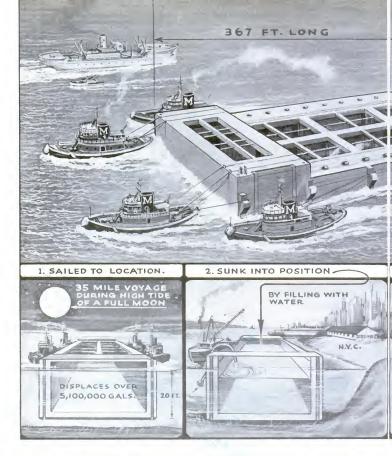


How N. Y. Pier Rode 35 Miles to Its Berth

THE strangest craft ever to sail the Hudson were three huge, rectangular concrete-and-steel caissons that were floated 35 miles downriver recently to form the foundations and basement of New York City's newest and most unusual steamship pier. They were built in an abandoned clay quarry, to which the river was then admitted by knocking out a 50-yard-wide wall.

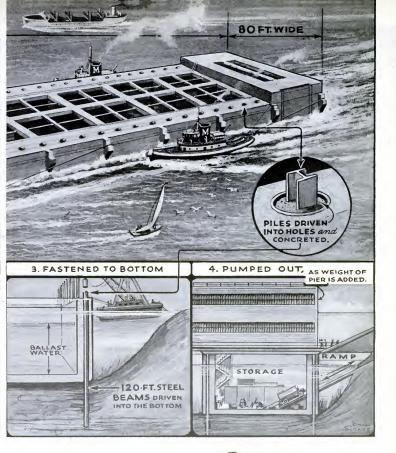

Each section of the fireproof, borer-proof, prefabricated pier was hauled separately to its New York City location at the foot of 15th Street. There the three caissons were assembled in the shape of a T with its head against the shore. The drawings above show how the first unit of the pier was moved to its destination, how it was anchored and how it will be used.



What's Cooking for Cooks



1. Pastry Tray. A rubber tray with a clothlike texture takes the place of the old pastry board and cloth cover. Concentric circles make it easy to gauge size of crust.





3. Meat Carver's Toolbox. When you bring this carving board to the table you don't have to search out the carving tools. A built-in drawer holds the cutlery.

A built-in drawer holds the cutlery. meat patties, too.

Further information on these products can be obtained from: 1. Wooster Rubber Co., Wooster, Ohio; 2. Live-Pak Corp., 35 India
St., Boston 10; 3. Richard Juddridge, Box 12, Ridgeway Station, Stamford, Conn.; 4. Heller Hostess-Ware, White Plains, N. Y.;

6. Pot-Lid Rack. Lid-Crib is designed to hang on a door or stand on a pantry shelf. There's a similar wire crib for metal or glass pie pans and ovenware.

7. Butter Warmer. When a lighted candle is placed under this sauce boat, its cargo—melted butter, hollandaise, hot fudge or gravy—will stay hot throughout the meal.

are fluted to grip asparagus, sausages or

whole carrots. They will lift flat foods like







2. Lobster in Cans.
Boston fishermen are
sealing wriggling lobsters into eans now. You
order them direct from
the packer, specifying
the date you want them.
When the can is opened
on arrival, out crawl
two lobsters, alive and
kicking.

5. Four-Sided Sink. This center-of-the-floor sink lets the housewife walk all around it and

walk all around it and use it from all four sides, saving many steps.

The Midway, a double sink mounted on a steel cabinet, measures 44 by 37½ inches.



5. American Radiator & Standard Sanitary Corp., Pittsburgh 30; 6. Elgin Novelties, Provincetown, Uniss.; 7. Susi Press Co., Whitiusville, Mass.; 8. Wilco Products, Box 905, Louisville, Ky.; 9. International Allied Industries, Hinleah, Fla.

8. Grease Guard. Fitted on any nine- to 12-inch skillet, this shield leans inward over the pan to catch spatters. It also can be placed on the stove around smaller pans.

9. Egg Poacher. Lowered into a skillet of water on this tray, eggs are poached in four watertight rings. Once cooked, it's no job to get them out of the pan.





Nylon-Glass Armor Saves American Lives

Enthusiastic reports from Korea say 8-pound vest of plastic tougher than ancient coat of mail— cuts battle casualties in half.



By Thomas R. Henry

A NEW knight in armor is appearing in battle—the American infantryman.

The soldier with war's most dangerous and essential job is going into conflict with almost his

entire torso covered by a relatively light vest made of glass fiber and nylon. It will effectively stop more than half of the missiles that normally cause battle wounds. He doesn't look much like Sir Galahad or the Chevalier Bayard—but Galahad or Bayard encumbered by their 40 or 50 pounds of hand-wrought steel wouldn't have lasted long under a mortar barrage in Korea's icy mountains.

The looks of the new mailed soldier, in fact, don't differ materially from that of the infantryman of the last war, except that he seems a little bulkier around the chest and stomach.

This armor is not absolute insurance against death in battle, but some of the more enthusiastic advocates estimate that it

Wearing new body armor, machine gunners of First Marine Division fire on enemy in Korea.





Knocked down but unhurt, Marine in Korea shows shrapnel piece stopped by armored vest.

may reduce combat deaths and serious wounds as much as 70 percent.

The most whole-hearted armor advocates are the Marines. Their enthusiasm is based on actual combat experience. The Corps has a slightly different type of armored vest from that of the Army, although the principle is the same. It was developed at the Naval Medical Field Research Laboratory.

Most Wounds from Fragmentation

The Marine armor is a sleeveless vest reaching below the waist, with a zipper in front. It weighs 7% pounds. The protection comes from contoured, overlapping plates of plastic, laminated glass fibers and a multi-layered nylon fabric.

This armor is not bulletproof in the sense that it will stop a rifle bullet at close range. But relatively few casualties in battle are caused by rifle bullets. It stops 45-caliber bullets from pistols or Tommy guns and fragments from exploding shells, which travel comparatively slowly. At least 70 percent of World War II battle wounds were caused by fragmentation ammunition.

Some of the estimates for Korea are astounding. Maj. Gen. John T. Selden, commander of the First Marine Division, says that in one action the number of dead would have been quadrupled had it not been for the vest. Navy Capt. Louis P. Kirkpatrick, the division surgeon, estimates that the vest has been 90 to 95 percent effective in preventing wounds of the torso, which previously suffered approximately 80 percent of all wounds.

A typical experience was that of a Marine private hit in the chest with a four-inch-square chunk from an 88-mm. mortar shell.

"I was just knocked to the ground with great force and had the wind knocked out of me," he says.

Another Marine lived despite a close

OCTOBER 1952 |55

mortar blast which embedded 41 fragments in the armor.

This, of course, is not the whole story. The Army is not entirely committed to armor of any kind. Some of its problems were discussed before the American Medical Association a few weeks ago by Lieut. Col. Robert H. Holmes.

Use of Armor Poses Weight Problem

Two trends conflict, he explained. In modern warfare top priority, especially among Americans, is given to speed of maneuver. This has led to all possible efforts to reduce the weight carried by the infantryman. At the same time there has been a tremendous increase in firepower, in which shell fragments are a more and more important element. Some compromise must be reached between the two opposing trends.

Armor of a less efficient type than that now proposed was standardized by the Air Forces during the last war. It was 50 percent effective in preventing injuries. Weight, however, is not so important to air crews.

Army experiments are being conducted at the Army Chemical Center at Edgewood, Md., with a somewhat lighter combat vest. The results, Colonel Holmes said, "are encouraging." Enormous strides in combat medicine and surgery have reduced the death rate among men wounded in action in Korea nearly 50 percent below that of the Second World War, he explained, adding that this advance soon will meet a saturation point, where very little further reduction can be expected from medicine alone, and more attention must be given to quick evacuation by helicopter and to body armor to prevent wounds.





HOW NEW ARMOR STOPS BULLETS: Demonstrator at left above fires ,45-cal, submachine gun point-blank at dummy wearing Marine Corps armored vest. Photo at right shows

nylon-glass armor plate shredded but not penetrated by bullet. Below, three flattened .45-cal. slugs removed from vest after trial are contrasted with original slug (left).











Boat Skims Over Water Like Plane Rides the Air

Hydrofoil "legs" on this motorboat lift it about 18 inches above water while an extra-long drive shaft on the outboard motor keeps the prop under water. Water flowing over the hydrofoils lifts them the same way air lifts a plane wing. The boat is said to skim along at 35 m.p.h. with motor at half throttle, turning safely without slowing and with little banking. The Baker Mfg. Co., Evansville, Wisc., makes the hydrofoils.

Demagnetizer Is Portable

Tools, dies and parts are demagnetized just by sliding over them the electrical instrument shown at right. Three poles of laminated silicon steel are mounted in the plastic case, flush with the bottom surface. When the switch is pressed, the current is closed, setting up a field which neutralizes magnetism. Releasing the switch automatically shuts off the unit. The Enco Mfg. Co., 4520 W. Fullerton Ave., Chicago 39, makes the Miti-Mite.







Rig Loads Truck in Six Minutes

With this setup, T. H. Holt of Greensboro, N. C., gets bricks aboard his trucks five times faster than by hand loading. The steel frame (left above) is placed over 3,000 specially stacked bricks and its sides are

squeezed tight against the bricks by hydraulic pressure. The solid 14,000-pound mass is lifted into position by a hydraulic cylinder operating on a power take-off. After the rear support is folded up (right above), the loaded Ford is ready to roll.

OCTOBER 1952 157

What Jets Have Done to Our Air Power

In 10 fast years, these engines have thrust speeds and altitudes farther into the "wild blue yonder."

By Herbert O. Johansen


TODAY America is well on the way to having an all-jet Air Force. Yet it was just 10 years ago this month that the roar of America's first jet airplane was first heard over the desert of California's Muroc Dry Lake.


In 10 years, jet engines have almost doubled the top speed of our fighters. Only a few years ago it was generally believed that no human being could fly through the sonic barrier and make a happy landing. Now it is routine for Air Force pilots to pass that barrier and fly faster than sound.

Jet power also has enabled our pilots to ascend 45,000 feet, into the stratosphere. And they can climb there almost straight up—at speeds unheard of when World War II broke out—to intercept enemy planes before they reach their targets.

The attainment of such speeds and altitudes, however, has posed problems, and these problems have brought about changes in planes which are almost as startling as the new power plants. Needle-nosed shapes and swept-back wings have become commonplace. Cockpits now are air-conditioned against extreme heat at low altitudes and extreme cold at high altitudes. The pilot's seats have to be ejected automatically in emergencies. Rear-released parachutes are used as brakes for hot landings. And the electronic equipment of a jet would give a World War II pilot who was suddenly placed in such a plane for the first time the screaming meemies.

Jockeying a hot fighter plane used to be considered a young man's job, because a person's reflexes and reactions slow down shortly after he passes the voting age. In World War II, the average age of pilots was 24 years. How were you going to make younger?

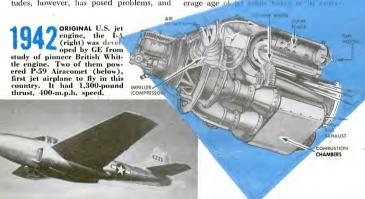That question is according to the erage age of the state

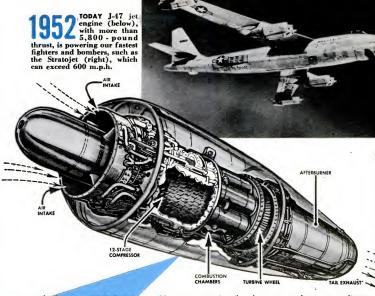


and of our Air Force's jet aces, 29 years. The explanation is not that supersonic jets are easier to fly. Instead, the explanation is that *no* human reflexes and reactions are fast enough to be relied on in a jet plane.

Electronic and automatic controls, which used to serve as a co-pilot occasionally, are literally the pilots in today's jet. The auto-

matic pilot that once took over to relieve the human pilot in tedious, long, level flight now is left at the controls during loops, rolls and other combat maneuvers.

Electronic devices also aim and fire the guns, cannon and rockets.

Yesterday the radarman was usually on the ground, scanning the skies for enemy

How a Jet Engine Works

Air is drawn into a compressor, where its pressure is raised. The compressed air is then forced into a combustion chamber. There fuel is sprayed in by high-pressure pumps, and ignited. Combustion greatly expands the air. The hot gases need more room, and as they rush out toward the tail exhaust they pass over a turbine wheel which is mounted on the same shaft as the compressor. Thus, the turbine turns the compressor, sucking in

still more air to be burned and expanded.

But not all the air is needed for this job. The rest of the pressure energy spews out through the tailpipe at very high velocity, creating the jet reaction that speeds the plane forward.

Some jets have an extra tail unit, called an afterburner, where gases that otherwise would be wasted are reheated to increase the jet reaction—or thrust—giving more speed and power.



JET POWER symbolized by flight of F-89 Scorpion interceptors. To strike at enemy targets


anywhere in the world, we are building eightjet, 10,000-mile, atomic bombers.

attackers. Jet engines have made it necessary to put him in the cockpit.

Ten years ago we had pursuit planes to chase enemy skyraiders—usually after they had done their damage. Then came fighter planes that went up to do battle over the target. Now we have all-weather, radarnosed, electronics-packed interceptors to shoot down attackers on their way to a target.

The great limitation of jet planes at first was their range. But now we can intercept an enemy long before he reaches us—if we are alerted in time—or deliver jet-borne

How Air Force Compares

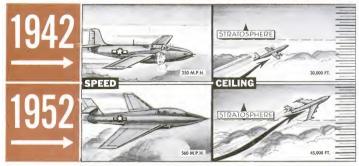

bombs, bullets or rockets far behind an enemy's ramparts.

No distance is too great for fighters and interceptors now. That was proved last July when a squadron of Air Force F-84 Thunderjet fighters, refueling in mid-air over the Pacific, flew 2,400 miles non-stop from California to Honolulu.

When the late General "Hap" Arnold, World War II chief of the Army Air Forces, told his staff in 1945 to "throw everything you have learned about aviation out of the window," he was thinking of jet speeds, pushbutton warfare.


Jet engines have brought about changes in both the tactics and strategy of aerial forces, and fighting at supersonic speeds now is pretty close to push-button warfare.

Peering into the future, Maj. Gen. Donald L. Putt of the Air Force sees even more rapid developments in the next 10 years than in the last. "We foresee," he says, "jet engines that will develop thrust in the 20,000- to 30,000-pound range . . . By 1955 they should be operating at speeds of more than 1,000 miles an hour and at altitudes in excess of 50,000 feet." Exp

How Jet Thrust Compares with Horsepower



JET power is rated in pounds of thrust. Roughjone pound of thrust is equal to one horsepower at a speed of 375 miles an hour. Thus, to equal the peak 54,000-pound thrust of the B-47 Stratojet (above) at 600 m.p.h., would require 24 piston engines of the World War II type (below).



After 10 Years of Jet

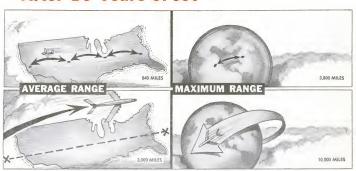




Table Brings Work to Riveter

THE worker riveting this aircraft wing panel need not move from his seat to do the job. Push buttons on the work table move a wing forward, backward and sideways so

that the work area is always under the riveting machine. Designed by Lockheed and Temeo aircraft corporations, the new setup saves hours on each panel, increases accuracy, reduces operator fatigue.



162 POPULAR SCIENCE

Plastic Pipes Carry Messages

Obstructions are quickly located in a pneumatic conveyor system (left) in which both pipe lines and carriers are made of tough, transparent Tenite. The new system is also said to be easier to install.

Tiny Device Spots Radiation

This pocket Atometer is filled with a liquid that changes color when exposed to atomic radiation. The degree of exposure is found by comparing the color with a chart. The Magnex Corp., Jamaica, N.Y., makes it.



Week-End Railroad Run Like Real One

By Robert Lasch

Donald Miller of St. Louis has a simple formula for organizing a railroad. First, you find an old locomotive lying around in somebody's basement. The rest comes easy.

That's just what he did, 13 years ago.

He got wind of a 12-inch gauge engine gathering dust in a neighbor's basement, and, with a couple of dozen friends, train cranks like himself, parlayed it into a full-fledged narrow-gauge railroad system.

The Wabash, Frisco & Pacific, they call it—after the three major railroads of St. Louis. The namesake lines, like others in

The pride of St. Louis' midget railroad is Number 400, a 5,000-pound, coal-burning Pacific.





the nation, have suffered at least one interruption in service during the last 12 years. But the WF&P-whose officers, owners and workers all toil happily without pay-has never missed a Sunday since 1940.

Thirty-five businessmen, professional men, students and teachers now belong to the association which owns and operates the system on research chemist Carlisle Schade's 30-acre farm in St. Louis County. They have well over \$20,000 sunk in three locomotives, 11 freight cars, a caboose, two passenger coaches, a mile of 12-inch gauge track, three stations, telephone and telegraph lines, shops, 22 switches, regulation signals, a turntable and a pint-size gasolinedriven section car.

The Wabash, Frisco & Pacific takes itself so seriously that trains run on a timetable, subject to written orders, in charge of crews who have passed examinations based on the standard code of operating rules for the Association of American Railroads.

On one memorable Sunday when the

EIGHT-WHEELED NUMBER 180 takes a short one for the road. In heavy passenger service she evaporates 23 gallons of water on a double circuit of the one-mile pike.



St. Louis area was glazed with a thick sheet of ice, the semi-pro railroaders had to attach a steam hose to the locomotive and melt the ice on the 12-pound rails out ahead. By the time they cleared a stretch of track, the locomotive would have to back up to the shops for coal and water, then tackle the grades anew. It took eight hours to make the run normally scheduled for a slow freight at 13 minutes—but they made it.

How You Assemble a Railroad

The original WF&P locomotive—Engine No. 171—had seen years of amusement-park service before retirement to its basement corner. It is a 4-4-0 type with tractive force of 225 pounds, 10%-inch drivers, 2½ by 3½ cylinders, steam pressure 130 pounds, weight 1,400 pounds. The WF&P rebuilt it completely, added a tender, and right away started looking for another locomotive.

Engine No. 180, slightly larger, with 300 pounds of tractive force, was bought—in non-operating condition—from a nearby amusement-park operator for \$450. It, too, was rebuilt.

But the railroad's collective emotions really churned when its officers located what was to become the prize of the line—a 4-6-2 locomotive, tractive force 770 pounds, weight 5,000 pounds.

This was a working scale model of the Canadian Pacific's 2300 class, three feet high and 15 feet long including tender. It had been built in England in 1925, and had seen service at England's Wembley Exposition in the Twenties. It emigrated to this country for the Philadelphia Sesquicentennial Exposition, and the WF&P found it at an amusement park in Denver.

The only hitch was finance. The engine had a price tag of \$3,500 on it. The WF&P had been spending between \$1,000 and \$1,500 a year on the system but couldn't see that kind of money. But just when hopes were lowest a mysterious financier let it be known that a loan could be had on terms of strict anonymity. The deal was closed and the loan for No. 400 later paid off.

Rails Are Junkyard Salvage

Rails were picked up in nearby junkyards, which had taken them in as scrap from abandoned narrow-gauge mine tracks or amusement parks. Four-by-four ties 24 inches long were cut from oak timbers and creosoted free by a tie firm. Ties and rails

[Continued on page 248]



FREE TICKETS boom traffic, but Dad and Junior are no deadheads. They'll drop a contribution into a special box to help keep the \$50,000 railroad running in the black.



LOCOMOTIVE HOSTLER knocks the fire. Good fuel and careful servicing pay off in top performance. Besides, a black exhaust is frowned on by the management.



DISPATCHER'S OFFICE is less formal than most, with brakemen receiving their orders directly from the "delayer." All movements are recorded on a standard train sheet.

How to Choose Your

A good tree lasts a lifetime. To help you pick the right ones, Popular Science has consulted experts all over the country.

TREES can do a lot to make your house more valuable—if you pick the right trees. But picking the right tree isn't as easy as it looks. There are more than 3,000 kinds in the United States—and they come in every shape, size, color and hardiness.

What's more, they come with all kinds of habits, good and bad, that you might not find out about until you've lived with them for a time. Some handsome trees have arboreal halitosis—they smell terrible. Others are untidy, dropping messy fruits or seed pods on the lawn. And some respectable trees have bad companions—bugs that raid your house, or blights for other trees.

Some Are Invalids

Some trees are likely to be chronic invalids, keeping you broke pouring asphalt cement into them. Trees that start out growing like Jack's beanstalk may get discouraged and die on your hands after a few years. There are trees that are roughnecks, out of place in the suburbs but useful in grimy cities where their gentler rivals would die. There are even thorny trees that are dangerous to pets and children.

To help you choose the best kind of trees

to plant around your home, POPULAR SCI-ENCE MONTHLY has asked tree experts at argricultural experiment stations all over the country for advice. We also asked similar questions of leading members of the American Association of Nurserymen.

We made it a point to have the survey nationwide because the climate and soils of the different parts of the country vary so much that no single list of trees makes sense. With experts reporting from every section, more than 350 trees have been suggested. You'll find the most popular ones on the chart on the next two pages.

Maples Are Favorites


You'll notice that some names appear over and over again. Of course not even these trees can be used everywhere, but they are, in general, the trees that experts like best-for you.

Among them, the Sugar Maple leads the field. Sugar Maple sap makes maple syrup, but the experts like the tree because it is handsome and fine for shade. Strong and easy to care for, it eventually grows to 90 feet—and sometimes as much as 110.

The Red and Norway Maples also drew

IN BUYING TREE, choose a reputable nursery that follows standards of American Association of Nurserymen. Shade tree should have at least minimum height for diameter. Sugar Maple should be five feet high for ½-inch tree, 18 feet for five-inch-diameter specimen.

SIZE OF BALL IS IMPORTANT. For nursery-grown Sugar Maple, ball should be at least 18 inches across for 144-inch-diameter tree; four feet for five-inch-diameter. Natural-grown trees need one-third larger balls. Small trees are usually sold bare-rooted.

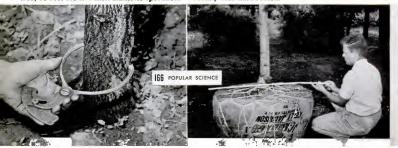





Pick Your Trees by Where You Live

THE chart below combines suggestions by horticulture experts at state agricultural expe-

| ı | Pacific Northwest |
|---|----------------------|
| | MOLITIMES |

Norway Maple, Pin Oak, Red Oak, White Birch, American Linden.

American Arborvitae, Lombardy Poplar, Siberian

WINDBREAK

Common Lilac, Japanese Quince, Willow, Siberian Pea Shrub, Japanese Snow-

PRIVACY

California

Pea Shrub.

ball, Wayfaring Tree.

CENTRAL VALLEY Hackberry, Chin. Pistachio

Aleppo Pine, Olive Myoporum laetum

Modesto Ash Myoporum laetum

So. Colif. SEASHORE & Australian Tea Tree

So. Colif. NEAR COAST Brazilian Pepper Tree

Catalina Cherry

Catalina Cherry

So. Calif. MOUNTAIN .: California Sycamore

So. Calif. DESERT - Texas Umbrella Tree

Incense Cedar Oleander, Tamarisk Incense Cedar Oleander, Tamarisk

So. Colif. INLAND VALLEY Modesto Ash

IDAHO, COLO., N. M.,

MONT., WYO., NEV.,

Catalina Cherry

Catalina Cherry

Rocky Mountain States

UTAH, ARIZ.

Green Ash, Thornless Honey Locust, Fruitless Red Mulberry, Norway Maple, Pin Oak, Bur Oak, Plane Tree.

Siberian Elm, Arizona Cypress, Green Ash, Ponderosa Pine, Eastern Red Cedar.

Flowering Crab Apple, Colorado Blue Spruce, Lombardy Poplar, Silverleaf Poplar.

Extreme Cold Area ME., VT., N. H., NO. N. Y., MICH., WIS., MINN., N. D., S. D.

Norway Maple, Sugar Maple, American Elm, Red Maple, Green Ash, Thornless Honey Locust.

Norway Spruce, White Pine, Norway Pine, White Cedar, Austrian Pine, Arborvitae, White Spruce.

Hemlock, Arborvitae, Willow, Upright Japanese Yew, Russian Olive, White Cedar, Black Hills Spruce.

Great **Temperate Area** CONN., MASS., N. J., SO. N. Y. AND L. I., R. I., PA., DEL., MD., W. VA., VA., KY., TENN., IND., ILL., IOWA, MO., ARK., NEBR., KAN., OKLA., OHIO

Sugar Maple, Northern Red Oak, American Elm, Thornless Honey Locust, London Plane Tree, Red Maple, Tulip Tree, American Ash, Sweet Gum, European Linden, Norway Maple, Pin Oak.

Norway Spruce, Red Cedar, White Pine, Katsura, Austrian Pine, Norway or Red Pine, Hemlock, Douglas Fir, American Ash, Pin Oak, Upright Japanese Yew, Arborvitae.

Arborvitae, Canada Hemlock, Amur River Privet, Red Cedar, Chinese Juni-per, Holly, Crimean Linden, Purple Beech, Katsura, Dolgo Crab, Ginkgo, Norway Spruce.

Southern+ Atlantic and Gulf States ALA., GA., LA., MISS., N. C., S. C., TEX.

White Oak, Water Oak, Live Oak, Willow Oak, Magnolia, Tulip Tree, Laurel Oak, Pecan, Winged Elm, Cedar Elm.

Carolina Laurelcherry, American Holly, Loblolly Pine, Southern Magnolia, Arizona Cypress, Photinia. Red Cedar, Carolina Laurelcherry, Holly, Southern Magnolia, Photinia, Arizona Cypress, Glossy Priv-

NORTH & CENTRAL SOUTHERN

Laurel Oak, Water Oak Jacaranda, Fig Tree

Laurelcherry, Oak Casuarina

Laurelcherry, Wax Myrtle Australian Pine, Camphor

many votes. The Red, often called Swamp Maple, has striking autumn foliage. The Norway, smaller than most maples, is better scaled for small houses. Both trees, however, are hard to grow grass under because of their dense shade and shallow roots.

The tree that draws most blackballs is also a maple-the Silver Maple, which gets its name from the silver gleam of the underside of the leaves when riffled by the wind. Although some experts and nurserymen like it for its handsome shape and size, and riment stations all over the country with those of leading members of the American Association of Nurserymen, Trees most often suggested are listed first. Some trees rarely mentioned are omitted for lack of space. Among the factors considered in making these choices were availability, price and amount of care required. Remember suggestions are generalized for large areas. For data on your neighborhood write your own state agricultural experiment station and ask local nurserymen and neighbors for advice.

| FRUIT AND NUTS | FLOWERS | LANDSCAPING | AVOID | |
|--|--|---|---|--|
| Apple, Sweet Cherry. | Flowering Crab Apple, Flowering Plum, Dogwood. | European White Birch, Cutleaf Weeping Birch, Flowering Plum. | Chinese Elm. | |
| English Walnut | Pomegranate, Kumquat | Chinese Hackberry | Lombardy Poplar | |
| Apricot, Seckel Pear | Flame Eucalyptus | Aust. Tea Tree, Holly Oak | 7 | |
| Anaheim Avocado | Sharpleaf Jacaranda | Podocarpus gracilior | | |
| select under local advice | Mountain Ash • | Lawson Cypress, Inc. Ceda? | Native Oaks, Pepper Tree, Moreton Bay Fig, Canary Island Palm. | |
| Grapefruit | Golden Rain Tree | Modesto, Montebello Ash | | |
| Lemon, Apple | Flow. Plum, Peach, Apple | Sweet Gum | لــ | |
| Dwarf Apple, Pear, Plum, Pecan, Apricot, Black Wal- nut. | Flowering Crab Apple, Bechtel's Crab, Flowering Peach, European Mountain Ash, Flowering Cherry, Flowering Plum. | Thornless Honey Locust, Norway Maple, Modesto Ash, Flowering Crab Ap- ple, Green Ash, European Weeping Birch. | Chinese Elm, Silver Maple, Box Elder, Eastern Flower- ing Dogwood, Redbud, Ar- borvitae, Hemlock (Colo.), Poplar (Idaho), Tulip Tree. | |
| Black Walnut, Apple, Hickory, Sour Cherry, Plum, Butternut. | Crab Apple, Thornless Honey Locust, Horse Chestnut, Black Locust, Hawthorne. | Norway Maple, European White Birch, Thornless Honey Locust, American Beech, Sugar Maple. | Chinese Elm, Silver Maple, Box Elder, Poplar, Tree of Heaven, Tulip Tree, Dog- wood, Magnolia. | |
| Apple, Pear, Black Walnut, Shellbark Hickory, Cherry, Peach, Crab Apple, Chi- nese Chestnut, Butternut. | Dogwood, Flowering Crab Apple, Redbud, Magnolia, Flowering Cherry, Haw- thorne, European Moun- tain Ash, American Holly, Empress Tree (south of NYC), Dolgo Crab, Euro- pean Beech. | Sugar Maple, Red Pine, American Elm, Pin Oak, Dogwood, Sweet Cum, Norway Spruce, White Pine, Red Oak, Flowering Crab Apple, Star Magnolia, Water Oak (south of NYC), Ginkgo, Linden. | Chinese Elm, Box Elder, Silver Maple, Poplar, Syca- more, Mulberry, Tree of Heaven, Catalpa, Gray Birch (Dogwood, Tulip Tree not hardy in Iowa). | |
| Pecan, Common Fig, Persimmon, Cherry, Peach. | Flowering Dogwood, East- ern Redbud, Southern Magnolia, Crape Myrtle, Holly, Silktree Mimosa, | Sweet Gum, Southern Mag- nolia, Willow Oak, Wing- ed Elm, Flowering Dog- wood, Magnolia Grandi- | Lombardy Poplar, Siberian Elm, Black Cherry Chinaberry. | |
| | Fire Thorn. | flora. | For South Atlantic mountain areas, use group 5 lists. | |
| Orange, Pecan, Peach | Magnolia, Dogwood | Flowering Magnolia | For Georgia and Gulf Coastal areas, use Northern | |
| Guava, Avocado, Mango | Golden Shower Tree | Magnolia, Braz. Pepper | Florida lists. | |

horticulturists turn thumbs down. The wood of the Silver Maple is so weak and brittle that branches are likely to come crashing down in wind or ice storms. And it is apt to die comparatively young (young for a

The oaks have even more members on the recommended list than the maples. The Northern Red Oak is an especial favoritenot only for its shade and beautiful fall color, but because it grows faster than

OCTOBER 1952 ISQ



TREES FOR HOMEOWNER TO AVOID include ordinary Honey Locust, whose spikelike thorns endanger children and pets. Same tree has now been bred without thorns or seed pods that must be raked up. Thornless type is hardy, disease-resistant, considered a promising new shade tree. It rates high on the "recommended" list.



RATE OF GROWTH AND EVENTUAL SIZE of Sugar Maple are shown in drawing. Rate is typical of many good shade trees. Sugar Maple's eventual height suits two-story houses better than modern one-story ranch types. Keep eventual size in mind when picking a tree to avoid overgrown look later on.

other oaks. It reaches 70 to 90 feet-like the maples, big for today's average home.

Southern tree men urge the merits of the Live Oak—the massive giant found along the South Atlantic coast. Another favorite, particularly in the Middle West, is the Pin Oak. This makes a fine shade tree.

Beware of the Elm

The oaks would have gotten more votes except for the threat of oak wilt in the north central states. For similar reasons many horticulturists steered clear of the most famous American shade tree, the elm. The Dutch Elm disease—a fungus infection carried by a beetle—has been spreading ever since it was brought to this country in veneer logs a quarter century ago. In some areas elms are also threatened by a destructive virus called phloem necrosis. But some experts recommend this famous tree anyway as "still the best of its kind for those willing to protect it."

Among evergreens, the pines lead in popularity. The White Pine—the tree on the pine-tree flag flown by Yankee minutemen—is recommended for windbreaks. It's the second largest pine, growing 80 to 90 feet high, but you can keep down its size by shearing it. In good soil, it grows as much as a foot a year for the first 20 years. But look out for White Pine blister rust, carried by currant bushes.

Evergreens Make Good Windbreaks

The Red or Norway Pine, often found with the White Pine in our native forests, is another tree urged for windbreaks. Evergreens get the nod for this job because winter foliage is needed to make a dense wall. The Norway Spruce and the so-called Red Cedar—really a juniper—that takes over abandoned New England meadows are also recommended. Although rather slow-growing, the Red Cedar with its fragrant wood and bark is suggested for privacy screens. But keep it away from apple orchards; it carries the cedar-apple rust.

And the apple is pretty important in the eye of the experts. Not only is it way ahead among suggested fruit trees, but it is a good tree for kids to climb. One expert urges getting little apple trees and grafting on several varieties yourself. He also suggests one- or two-year-olds, rather than the more expensive ones of bearing age. Many horticulturists, though, are cool toward the

[Continued on page 250]

Trolleys Power German Tugboats

ELECTRIC tugboats powered through trolley poles riding overhead wires are being tested on a German canal between Zehdenick and Berlin. Batteries, charged by the trolleys, take the tugs through locks and any other spots where the trolleys can't be used. The builders hope to install the system on the Mittellandkanal which crosses all of Germany.



Giant Generators Ride the Rails on Heavy-Duty Flatcar



An atlas of the rails, the 106,000-pound flatar shown at left can shoulder more than four tires its own weight. Sixteen wheels on four trucks beneath the flatcar bed won't buckle under a load of 493,000 pounds—more than 246 tons.

The car is used for shipping huge stators and generators and carries all but the very largest generators, completely assembled for use. It was built for Westinghouse by the Thrall Manufacturing Co. of Chicago Heights, Ill.

All-Purpose Garden Clipper Runs on Compressed Air

THIS English clipper is driven, cleaned and lubricated by compressed air. It is said to mow a 15-inch swath, trim 2,000 square feet of hedge in an hour and cut one-inch tree limbs. A notch at the tip lops off branches. The entire tool, with its 101/2ounce motor, weighs less than three pounds. R. M. Marples and Son, Parkstone. Dorset, make the clipper, called a Shearomatic.



They're sleek, slick, dependable, with twice the horses under the chrome that the old-timers had.

By E. F. Lindsley

Look What They've Done to



Then Old-time cyclists had to be a rugged, wrench-wise lot. Above, sports-writer Hamilton M. Laing rode this 1914 Harley, with acetylene light and exposed valve rods.

Motorcycles

MY FIRST motorcycle, a roaring, smelly, kidney-kicking mechanical bronc, was a 1921 Harley-Davidson. Don't guess my age from that. The bike was older than I was. But it taught me, as such seventh-hand

motorbikes taught thousands of American boys, what made gas engines go.

Sporting a 61-cubic-inch motor with naked push rods and rocker arms, this job was once advertised to have "all the speed



EDITOR'S NOTE:

Back in 1901 two Milwaukee schoolboys dreamed of putting an engine on a bicycle. With the help of Walter Davidson, a railroad machinist, Bill Harley and Arthur Davidson cast and machined the parts for a three-horsepower engine. Their motorized bike ran, others wanted machines like it and the boys soon found themselves in business.


From that start in a 10- by 15-foot shed workshop, the Harley-Davidson Motor Co. has expanded to three modern factory buildings and built more than 682,000 motorcycles to date.

To learn how a former rider would react to the newest machines, we asked E. F. Lindsley, who hadn't ridden a motorcycle in years, to try the new Harley-Davidson Model K. Here's what he found.



Now a 45-cubic-inch twin, has twice the power of old machine at left, plus a four-speed, foot-shifting transmission, hand-oper-

ated clutch, swinging-arm rear suspension, hydraulic shocks and complete battery-generator electric system. You don't have to be a bronco buster-mechanic to ride nowadays.

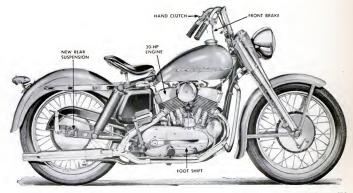

anvone could desire." So it had; your yen for scat was tempered by the spine-jolting ride it delivered. What finish was left on it had once been (the catalogue said) an attractive olive drab.

Without getting out of my four-door sedan, I could tell that today's motorcycles are chrome-and-color beauties. But I had to get one between my knees to find that the real difference just starts there.

The one I tried out was the new Model K Harley-Davidson. This 45-cubic-inch twin is not only miles ahead of that ancient 21-J but far out in front of earlier postwar.

models.

The factory rolled out a machine for me and I eased into the saddle. They've done marvelous things to that upholstery you steer with (as any rider knows, it's done by the seat of the pants). Foam rubber, two sprung seat posts, and anatomy-wise contouring do the trick.

Where's the Shift?

Looking for something familiar to show I was no beginner, I latched onto a lever grip on each handle bar. "Front and rear brakes, eh?" I said.

Sammy Greco, the Harley man who was checking me out, chuckled at that. "Left one is the clutch. It gives you a faster shift

than the old foot type."

My left foot groped speculatively where the clutch used to be. Then it settled down on a comfortable footrest just above a husky pedal. This was the rear brake. The righthand grip was the front brake.

Facts on Model K 45 Twin

Engine: two-cylinder, air-cooled, fourcycle V type; piston displacement, 45 cu. in.; compression ratio, 6.5 to 1; bore 2%", stroke 3 13/16"; 30 hp. at 5,200 r.p.m.; torque 32 lb. ft. at 4,000 r.p.m. Weight: 446 lb. (no load); per hp.,

14.9 lb.

Transmission: four-speed constant-

mesh; sliding-dog clutches.

Gear ratio: 4.77 to 1 (in high gear).

Clu:ch: multiple dry-disk type.

Drive: motor to transmission, 3"-pitch triple chain; transmission to rear wheel, -pitch single row chain

Rear suspension: swing arms pivoted on preloaded Timken bearings.

Fro it fork: load transmitted by long helical springs, hydraulically damped.
Top speed: 85 m.p.h.
Tire size: 3.25 by 19.

174 POPULAR SCIENCE

"What am I supposed to shift with, my teeth?"

Patiently they told me. "Biggest change in years. You shift with your right toe." I looked down and found a pedal I hadn't shoved vet.

"Hook your toe under the pedal and pull up." I flipped my toe and felt the constantmesh gears do their stuff smoothly.

"You've got four speeds," Greco explained. "The lower gears give better acceleration. Top gear is a honey-a sort of over-

drive for cruising."

30 Horses Have Zip

I knew the model K nudged the scales at nearly 450 pounds, so Greco's last words raised my eyebrows. "An overdrive ratio with a 45-cubic-inch engine?"

"Try it," said Chris Spexarth, Harley's assistant chief engineer. "I think you'll find

30 horsepower plenty hot."

"You mean 30 horses stripped down, without accessories, on the test stand?"

"No, sir." he snapped. "We mean 30 horsepower with full accessories, at a 6.5to-1 compression ratio, on regular gas.

Later I saw the test curves. Horsepower peaked at 30 at 5,200 r.p.m. My old 21-J hit 16 hp. at a screaming 3,250 r.p.m. and

fell off after that.

Closing the choke a bit, I retarded the spark (left handle-bar grip), opened the throttle slightly (right handle bar) and turned on the ignition. Then I booted the kick starter, and the engine boomed into a smooth rumble on the first try.


Left hand on clutch, flip into low with right foot, and let in the clutch. Smoothly the K took off. Grip the clutch, flip up right toe into the next gear, and ease in the clutch. The foot shift was fine.

Takes Bumps with No Bounce

I was musing on the nice handling and extra zip in third gear when I found myself almost on a big hummock, where concrete had buckled from the heat. There was no chance to swerve. Instinctively I rose off the seat to soften the jolt.

It came as a ripple. No jolt, no slamming wallop from the rear wheels. This was new, too-automobile comfort with motorcycling zest.

With traffic thin, the four-lane highway west of Milwaukee invited speed. Acceleration was excellent as I opened up, but top speed seemed a bit low and the engine was

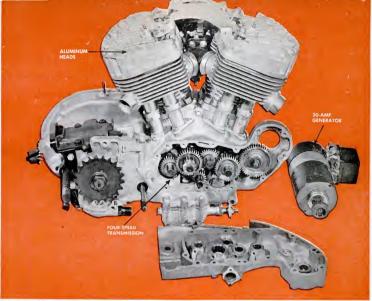

NEW ENGINE develops 30 hp. Open crankcase above shows integral constant-mesh four-

speed transmission. Cylinder walls are oiled by .040-inch jet. Generator gives 20 amps.


winding up hard. Then I remembered that fourth gear.

The shift was a revelation. Opening up, I hit top speed (85 m.p.h.) easily, then settled back to the 65-mile speed limit.

A short stretch of gravel roughened by storms again demonstrated the effectiveness of the new rear suspension. Two swinging arms, pivoted on roller bearings, have a full five inches of travel, with coil springs and hydraulic shocks to soak up the bumps. I found no sloppiness or fishtailing.

Back at the plant, chief engineer Bill Harley showed me through the modern testing department that puts machines and accessories through their paces before the riders do. His point—and he convinced me—was that you don't have to be a mechanic to ride a motorcycle these days.

Looking the new machines over, I still find a soft spot for the old 21-J. It was one of a long line of honorable ancestors, and it has some kids it can be proud of. END



REAR SUSPENSION, a rigid fork on old machines and a sliding mount with 1½-inch travel on later models, now consists of two roller-bearing pivoted arms.

OCTOBER 1952 175

PS.

Last minute news & notes...

U.S. AIRCRAFT CARRIERS will make oxygen for their high-flying pilots. Special plants for extracting liquid oxygen from the air are being installed on vessels of the Midway, Essex and Forrestal classes.

<u>PERMANENT MAGNETS</u> of a new kind, among the most powerful ever made, have been produced without using any critically scarce nickel or cobalt. Naval Ordnance Laboratory scientists make the material, called Bismanol, by treating powdered bismuth and manganese at high temperatures.

A STLF-LIGHTING CIGARETTE, talked about for years, may at last reach the market. A company in California plans a million-dollar plant to make cigarettes that would be lighted by rubbing their emulsion-coated tips along the side of the package.

<u>URANUM</u> will be produced as a byproduct by six of South Africa's famous gold mines beginning this fall. Treatment of waste "slime" from gold production will yield uranium oxide, atomic raw material.

ANTIBIOTICS are usually thought of as lifesaving medicines--but last year \$17,500,000 worth went into hog and poultry feed, too. For reasons still not completely understood, the germ killers make livestock grow faster and fatter.

SUBMARINES of France's new Narval class, advance tips say, will be faster underwater than afloat--and are expected to be able to dive far below the traditional depth limit of about 250 feet.

MOLTEN SULFUR will be the unusual cargo of a newly launched barge, which will carry it from a mine near Liberty, Tex., to Houston for making sulfuric acid. Shipping the sulfur in the molten state will save later

reheating. The barge's 167-foot insulated tank will keep 1,000 tons of the chemical at 300°.

GERM WARFARE is being waged against that scourge of Australian farmersthe rabbit. A virus called myxomatosis, intentionally spread in test areas, killed tens of millions of the pests in 15 months. The disease does not affect other animals.

WANTED: "Middle-aged" water--at least five years old, no more than 20--by Prof. W. F. Libby, University of Chicago, who seeks at least 30 gallons to test its content of radioactive tritium. He obtained some, but not enough, from an undertaker's fire extinguisher and a housewife's water jug. He hopes to find larger amounts in old hot-water heating systems, the kind that keep circulating the same water over and over again.

<u>BRIGHT SCARLET LIFE RAFTS</u> are likely to become the latest U.S. Navy style. Tests show that they can be spotted more easily by rescuers than the present chrome-yellow ones.

HOME RADIO SETS now can be massproduced mechanically from start to finish. Formerly electrical connections had to be hand-soldered. Now even this has been eliminated, Motorola Inc. announces, by its adoption of completely "plated" circuits.

LIQUID METAL, which acts as a heattransfer medium in modern atomicreactor designs, may serve the same purpose in future steam power plants, too. Molten sodium, a metal of low melting point, carries heat for superheating steam in a power-plant design proposed by two engineers of the Knolls Atomic Power Laboratory, R. H. Shannon and J. D. Selby.

THE NATION'S FIRST high-power, ultra-high-frequency TV station, now under construction by GE, will be delivered for erection at Reading, Pa., this December. The 261-kilowatt station, WHUM-TV, will cover most of eastern Pennsylvania and parts of Delaware, New Jersey and Maryland.

The Editors



5 Ways to House Your TV Set

BUILT INTO WALL, TV set takes up no space in room, is hidden when not in use. Wall also houses radio, phonograph and speaker, stores records and books.

More people spend more time looking at your television set than at any other piece of furniture. You can improve its looks.

By Robert Gorman and Joseph Aronson

YOU parked that shiny new 20-incher in a place where it's in your way. Now you're wandering around the living room trying to find a suitable place to put it.

Or maybe you haven't bought one yet, and you're trying to decide what type to get. A console would look nice but cost a lot. Maybe you already have the radio-phonograph part anyway.


A table model would be ideal-but where to put it? It has to go where it can be seen by a number of people, and it ought to be 25" to 30" from the floor for proper viewing. That usually means putting it on top of

something you already have. It would be bulky, it probably wouldn't match anything in the room, and it would steal valuable table space.

Actually, table sets are not only considerably cheaper than consoles, but they are vastly more flexible. The average modern set is roughly a cube measuring 20" each way. That means you can squeeze it into some mighty small spaces. With a little ingenuity and work, you can put it on its own harmonizing table, fit it into a bookshelf, hide it in a wall, even cart it from room to room on a wheeled tea table.

1. Tables. A small table built to match or complement the receiver will make it look at home against a wall, in a corner or


OCTOBER 1952 177

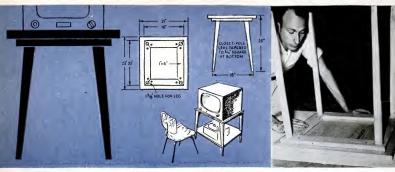

TABLES. Take your pick of the simple one above or the more versatile one on the facing page. Top for table above can be 34" plwood, or pine boards edge-shied together. Mitered frame, glued and

screwed to underside, strengthens top and provides holes for closet-pole legs. Table is designed for 20" set; for smaller models, lengthen legs to raise set to proper height. Alternate version (above center) adds shelf.





PORTABLE TV. A wheeled cart will roll out your set when you want it, then store it neatly out of the way when you don't. This one is made of birch plywood with solid-birch legs to match birch TV cabi-

even in the middle of the floor to divide off two parts of a large room. The photos and sketches on this and the next page show basic tables that can be built to meet a variety of needs.


The first is little more than four legs and a top. The second adds a small drawer to keep TV schedules handy and has a swivel base so that the set can be viewed from any part of the room. On either one, make the top 2" larger than the set, including any

net. For a painted cart, use less expensive fir plywood. Legs are glued and screwed to two cross pieces to which top is then glued and screwed. Shelft, notched to take legs, is doweled and glued in. Casters are 3" in diameter.


picture-tube overhang in back of the set.

2. Portable TV. If you don't want to give up wall space for your set, you still have lots of choices. A wheeled cart will serve up television as easily as tea—and give you both wherever you want them.

It is an ideal answer to the very common complaint that the best place to keep a set is not the best place to view it. Maybe you have an alcove in a hall that's going to waste. The tea wagon will fill the space

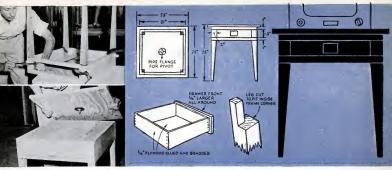

TURNTABLE BASE and storage drawer make this table do several jobs. Top is 34" plywood glied and screwed to 34"-pine side frame. Notched legs are glued into frame, using C clamps and V blocks to hold them securely during drying (upper left). Rotating base pivots on short length of pipe screwed into pipe flange and inserted in hole in table top. Table shown here and one on facing page were designed by John Rogers of Dallas.

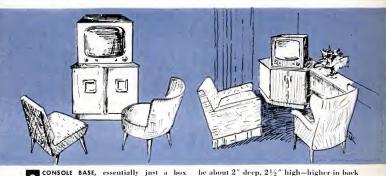

CONSOLE BASE, essentially just a box made of ¾" plywood, is easy to build, provides a lot of storage space below set. For best appearance, miter corners to conceal plywood edges. Toe recess should

25" to 30" high, depending upon size of set. attractively during nonviewing hours, and comes and you don't want to be disturbed. when you want to watch a program all you If you use an outdoor antenna on your

You can angle it toward your favorite chair and shift it around as others join the audience. You can roll it into the dining room so that you can watch it while you're eating, take it outdoors with you on hot summer evenings, and if you have a onefloor house, even move it into the kids' room so that they can have it when company

have to do is wheel it into the room.

designed to fit in a corner. Bases should be

if you want cabinet to clear baseboard and sit flush against wall. At right is similar cabinet

portable receiver, tap the lead-in at several points and install twin-lead connectors so that you can plug in the antenna when you plug in the set.

3. Console base. Made of " plywood, this is actually a simpler construction job than the tables. It blends well with the more massive modern furniture and has the advantage of making use of the space below

OCTOBER 1952 179





TV set into existing room arrangements without stealing much space. Here center section of old bookcase (right) was built out with plywood at the original

height to take the set. Shelves and doors were then added to house radio and phonograph inside. Bookshelves blend well with set, add horizontal lines to reduce massive appearance. For another version, see below.

the set. You can house a radio and phonograph in the lower portion or just use it for extra storage.

If your furniture layout leaves no room along a straight wall, either a table or console base can be adapted for use in a corner.

A screen slanted across a corner usually faces the longest dimension of the room so that it can be seen by the most people in the greatest comfort. Angling any piece of furniture, however, is likely to make it somewhat conspicuous. Where possible, a corner table or console base should continue the lines of other furniture in the room. The sketch on the preceding page shows how a console base is tied in with a bookcase so that both seem to form a single unit

A triangular cabinet wide enough to take the full depth of most sets would measure about 60" on each side. An installation as big as this would overpower most averagesize rooms, beside wasting wall space. Lopping off the points of the triangle at the sides, as shown in the sketch, not only cuts much of the bulk but also provides flat sides against which you can place bookshelves, storage cabinets or other furniture.

4. Expanding a bookshelf. If you have bookshelves along a wall, you can borrow a little of their space without altering the original plan—and without banishing your books to the cellar.


The low bookcase shown was originally divided into three sections by vertical partitions. The center section, just the right width for the TV set, was built out to double depth with plywood panels glued and screwed to the existing uprights, forming a support for the set.

The full, floor-to-ceiling bookcase gave up parts of four shelves to create a shallow

PULL-OUT CABINET fits in shallow alcove made by removing four shelves from center of tall bookcase. Cabinet, made of ¾" plywood with space inside for radio and phonograph, has non-castering wheels that let it roll straight



in and out without turning. Wheel mounts are screwed to underside of raised bottom, and sides are carried down almost to floor to hide them. Turntable on top permits set to be angled when cabinet is extended.







STORAGE WALL, built to fill part of wide, unused archway, houses complete home entertainment center, also serves as room partition. Since wall bears no load, construction can be simple bookcase type.

Shelves holding heavy radio and TV units should be dadoed into uprights or supported on husky cleats, but others can just be nailed in or held by adjustable peg-type shelf hooks. Door at rear (left) gives access to units.

alcove for a wheeled table that rolls easily out for viewing, then back in for storage.

5. Storage wall. If you feel that your TV screen stares out at you like the single eye of a Cyclops, you may want to hide that eye when you're not looking at it. Building a simple bookcase-type storage wall to house the set will not only get it out of the room but will add valuable space for a radio and phonograph, record albums, books and other articles. Adding doors to the sections holding the electronic units will permit them to be hidden when not in use.

One trick for building in a full-height bookease or storage wall is to make it slightly short of the ceiling, so that it can be moved easily into place, then wedge in blocks to fill the gap. Snugged in this way. the wall need not be attached to the floor or ceiling and can be taken down anytime without leaving permanent marks. Strips of molding nailed around the upper edges will conceal the gap.

Model trains get the highball next month. See the tips on how you can dress them up and improve their operation.

ELECTRIC FOOD MIXER

If it does not run, the circuit is open. First check the wall outlet itself to make sure the house circuit is not at fault. The open could be in the cord or plug, in the speed-governor switch, or in the motor itself. A broken lead or loose connections could cause the trouble. In the motor, the field or armature could be open or the brushes stuck or worn.

If it does not run but hums, the beater gears may be jammed. Dry or worn bearings may freeze the shafts so the beaters cannot turn. If gears or gear pins break, the motor may run but not turn beaters.

If it is noisy, it may just need lubrication. Worn bearings or gears will also eause noise. If the speed governor is off balance, it will vibrate,

If it icrks and vibrates on a low-speed setting, the speed governor may be defective. The governor condenser or the resistor may be open.

If it has no power, it may require lubri-cation. Worn bearings or gears may produce enough friction to use up most of the motor power. Dirty governor contacts or a dirty motor armature commutator will prevent sufficient current from flowing.

If it runs at high speed only, the chances are the governor contacts are welded, the governor condenser is shorted, or the governor is not operating.

If it will not shut off, the switch is defeetive or the linkage to the switch is out of adjustment. (From Electrical Appliance Servicing, by William H. Crouse.)

FOR YOUR POPULAR SCIENCE MONTHLY INFORMATION FILE

Do You Play with Fire?



Do you stuff oily rags in a drawer? Putting a cloth soaked in linseed oil inside a closed compartment is a sure invitation to spontaneous combustion. Keep a closed metal container in your shop, perhaps a small garbage can, for disposal of all oily rags. Some workshoppers store machine-wiping rags in a coffee can.

> Do you weld near combustibles? The flying sparks can cause sawdust and chips to smolder, perhaps to burst into flame hours later.



Do you leave litter on floor? Waste and wood chips left underfoot, to be swept up some day when you have more time, may bring a day when you'll have no shop—or home.


Do you smoke while spraying paint? One gent we know once turned the spray upon a burning cigarette to see what would happen. Nothing did—but his luck won't continue.

Is your wiring makeshift? Shop wiring should be heavy duty, at least equal to what comes with your motors. Stick to prescribed fusing. Never over-fuse to handle starting loads.



Are your solvents left uncovered? All paint thinners are volatile and an explosion hazard. Keep them tightly capped and store them in a spot away from extreme heat. This applies also to blowtorches. Gasoline should go outside.

Kite Launches Glider in Flight



JETO-KITE, the invention of a Canadian woman, adds a new note to the old sport of kite flying.

The kite is launched with a sleek balsa glider cocked on its back under rubberband tension (top). When the kite is flown out to maximum altitude, a small release kite is sent up along the string Ben Franklin style. This kite climbs the string with sufficient momentum to trip the trigger on the carrier kite, sending the glider off into a steep loop followed by a long glide back to earth.


Mrs. G. D. McKay of Montreal has applied for a patent on the kite and plans soon to put it on the market.

Caster Positions Calking Gun

This simple attachment is a rolling rest that always keeps a calking gun at the

correct angle. Shape a wooden block to flit the gun barrel and drill it to take the shank of a caster. Fasten the block to the "gun with some wire. — Ken Murray, Colon, Mich.



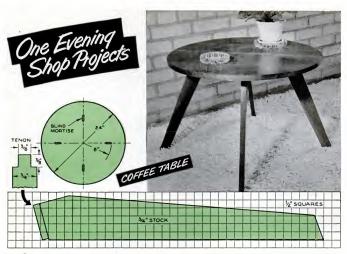

For the living room. Simple lines make a low table that harmonizes with almost any type of furniture. I built this one of walnut, but other woods such as birch, maple or pine would be equally satisfactory. For the top, edge-glue ¾" stock to make a piece a little more than 24" square. Then bandsaw a 24"


disk. Blind mortises for the leg tenons can be made by drilling %" holes and then chiseling away the rest. Glue the tenons in and strengthen the legs with angle brackets. Finish the table to match the other furniture in the room.— M. S. Schroeder, Mundelein, Ill.



For the dining room. A plain kitchen clock becomes an attractive wall decoration when it is housed in a plant holder like this. Most of the dimensions must be laid out to suit the clock you use.

Begin by cutting the upper and lower shelves. Join them with partitions of %" stock to form the box that holds the clock. Then add the smaller shelf on top of the upper shelf. Brad and glue blocks to the lower shelf to support the glasses or pots that hold the plants.

Face the assembly with ½" half-round molding, nailed in place, and serew two angle brackets under the top shelf to hold the unit to the wall. The planter can be painted or enameled to match the trim in the room.—John C. Voelker, Baltimore.

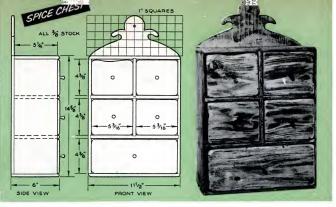


For any wall. My most expensive item for this reproduction of an early American spice chest was the knotty pine. Two 10' boards—one %" by 5%" and the other %" by 11%"—cost \$3. Finishing materials and nails came to less than \$2, bringing the total cost of the chest to less than \$5.


Cut out the parts and nail and glue them together. A coping saw will handle the curves at the top. Aging the chest to give it that 150-year-old look is next. Peck it with an ice pick and round the corners with a file and sandpaper. Then scrub it here

and there with a wire brush, being sure to brush with the grain.

Staining comes next. Mix a little Van Dyke oil color with about two ounces of turpentine and a little linseed oil. More turpentine will make the stain soak in faster; more oil will slow the process. Try it on a scrap until you are satisfied and apply the stain with a cloth or brush.

When dry, sand all parts lightly with fine sandpaper. Then brush on two coats of dull varnish with a light sanding between coats.—Carlton Strickland, Roanoke, Va.

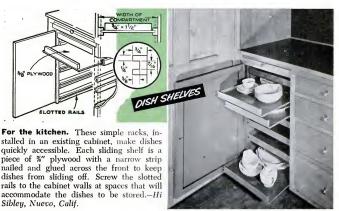

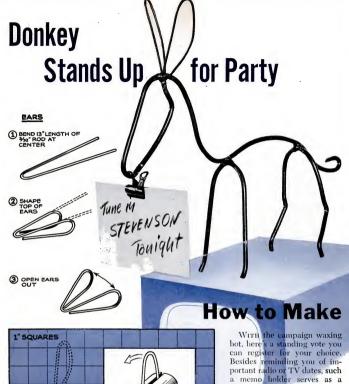


hot, here's a standing vote you can register for your choice. Besides reminding you of important radio or TV dates, such a memo holder serves as a center for family notes.

If welded, brazed or silver-soldered, the pieces will stand handling well. Any gas torch or blowtorch will do for silver-soldering the parts, If only

soft-soldered, the pieces will serve as ornaments but will

not bear much handling.

Lay out a full-size pattern as a bending guide. Shape the backbone and legs from 3/16" steel rod, such as curtain rod. For a bending jig, drive two short ½" pins into a metal block, spacing the holes to leave 3/16" between the pins.

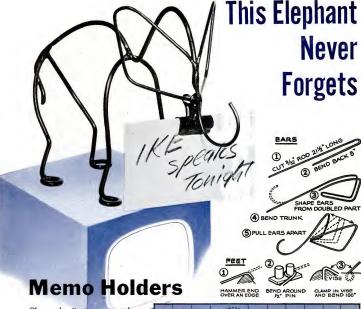


Clamp the jig in a vise when bending stock in it.

One piece of rod forms each pair of legs. Bend it at the center first. Then clamp the two legs in a vise to make all the other bends in both legs at once. Make ears of lighter rod to avoid overbalancing.

To hold the parts for welding or soldering, insert the donkey's feet in holes in a piece of wood. Clamp the elephant's to a flat surface. Clamp the backbone to one pair of legs while joining to the other.

Spring-type paper clips are only soft-soldered on (so as not to take the temper out of the spring), the finger grips being bent to provide free action.





CHECK MOUNTING BRACKETS and replace if loose or corroded. If mast is more than 10' high, brace it with guy wires. Aim wired arm at transmitter. Then, with someone at the set to advise you, rotate it slightly to chase ghosts and bring in full signal. If there are several possible locations on roof, try all.



CLEAN UP PARTS with emery cloth and steel wool. Take antenna down rather than try to reach up to it. Elements must be thoroughly brightened at joining ends. Other parts of rods can be cleaned for appearance.



BRIGHTEN INSIDE SURFACES of bracket so that it will make good electrical contact with the rods. Clean the insulating block with carbon tetrachloride. (Don't use sandpaper on the block; it will leave scratches that soon will accumulate dirt.) Disassemble the bracket completely before beginning job of cleaning.

TV Reception Slipping? It May Be Your Antenna

One rusty terminal screw can sabotage a chassisful of new tubes.

By John P. Kenneally

Rocket ships from "out there," Wrestlers flying through air, Gave proof through the night, That our antenna was still there.

YES! It's still there, but months of weathering may have reduced its efficiency slowly and imperceptibly, eating away at your picture quality and bringing you snow in September.

It's time now, before winter moves in, to get up on the roof and check the other half of your TV set. The antenna has an important job to do; it must reach up and catch the TV signal from out of the air and feed it to the lead-in wire for delivery to the set. To do this, it must be in top condition both mechanically and electrically.

The best and safest idea is to loosen the mounting brackets and take the whole works, mast and all, down to the ground where it can be worked on more easily.



SOLDER CONNECTIONS with resin-core solder to prevent loosening and insure good electrical contact. Antenna is only as strong as its weakest point, so don't overlook anything. New lead-in wire will help if old is weathered.



REASSEMBLE ANTENNA and replace all rusty screws, especially the terminal screws, with brass or cadmium-plated ones. Use clamptype stand-off insulators to support the leadin wire along the mast. Place the first insulator close to the terminals to prevent the wire from whipping in the wind.



SHELLAC ALL JOINTS and connections after tightening them securely. Flow shellac between bracket parts and coat wing nuts to retard corrosion. Note very short length of unsupported wire between first stand-off insulator and terminals; this is important as wires will break if constantly flexed by wind.

Pen Creases Cardboard



WHEN working with cardboard, a ballpoint pen is a good tool to scribe creases for folds. The point won't scuff or cut the cardboard. If you don't want the lines inked in, insert an empty cartridge in the pen.—Andrew Brennan, Philadelphia.

Stair Tread Pads Vise

A RECTANGULAR section cut from an old rubber stair tread makes a neat, no-slip, no-gouge pad for a small vise. A wide slot cut in the center of the pad will let it slip over the vise-tightening screw.—R. F. Donavan, Guttenberg, N. J.



Bumper Jack Supports Hitch



CARL BIERT of Latham, Mo., bolted a bumper jack to the hitch of his combine. This makes it easy to align the hitch with the tractor. It also supports the hitch when the combine is not being used.—
L. II. Houck, Jefferson City, Mo.

OCTOBER 1952 |89



How I Gave My Car

That Continental Look

Here's how to build a carrier that puts the spare tire out in back.

By Roland Loewen

M OUNTING the spare tire behind the deck gives any car something of the racy swagger of the famous Lincoln Continental. It also leaves more room in the luggage compartment.

This is a popular customizing stunt nowadays, and several companies make a business of supplying necessary parts. But you may prefer to start from scratch, as I did, and save vourself money.


I added a Continental spare-tire carrier to a DeSoto convertible. The principles, if


1 BUMPER WAS MOVED BACK 6" by sawing out center section of old bracket and bolting on new parts made of ½" by 2" iron. Ends of old bracket were left bolted to car frame. Parts were assembled with ½" bolts, and other ½" holes were defilled for bumper bolts.


not the dimensions, could be applied to any other car. I moved the bumper back 6" and added a new gravel pan to fill the increased space. A hinged bracket allows the tire to swing down for access to the luggage compartment. The bracket runs through a slot cut in the extra hub cap I bought, and the cap is bolted permanently to the bracket. Loosening one nut frees the wheel and tire. Instead of buying a metal tire cover, I chose one made of convertible-top fabric.


A machine shop did the bending and welding. An auto-top shop made the tire cover. Even so, my expenses ran less than \$30.

2 NEW GRAVEL SHIELD to fit wider space between the car body and bumper was cut from 18-gauge sheet metal. Old shield was used to make a cardboard pattern first. After shield had been bent down to form tire well, another piece was welded to the front edge.










3 HINGED BRACKET made of ½("b) piece of key stock welded to bottom plate keeps assembly square with humper bracket. Size of carrier bracket was found by settling wheel in gravelshield well. Sized disk bolted to front face keeps wheel in position, hig holt welded through disk center keeps spare secure when nut is drawn up against clamp. Latter was cut from piece of channel. Pilot pin just below hug bolt keeps clamp vertical. Spring pulls latch against stop pin, and a lock prevents theft.

4 SLOT WAS CUT IN HUB CAP to slip the carrier through. Slot was made by drilling \(\frac{1}{2} \) in the saw and file. A holt at hottom and holted radial supports at top fustee cap to carrier. The supports, heat to conform to the tire, are joined at top hy strip of sheet iron. License plate attached high on carrier hides slot in cap. Setserews in hottom end hear against humper brucket and keep the carrier and spare tire vertical.



5 NOTCHED LATCH ENGAGES CLIP bolted to deck lid to hold tire in running position. Deck fitting was removed and depressions filed out to take the drilled ends of brackets made from 1½" by 1" iron. Rubber stoppers at ends of anti-rattle bar hear against wheel. Gravel shield and all parts of carrier were painted to match the car. License plate should have a shielded white light directed on it to meet legal requirements of most states.





Homemade Meter Quickly Checks Car Battery B. E. L. Garrett



Modeled after a military tester, it measures voltage changes.

I HAVE a new way of checking my car battery. My homemade tester will doeverything a hydrometer will do-and more -without spilling a drop of acid. It measures



Mounted in car, homemade tester gives a quick check on battery condition. For this use, it is permanently connected to one "pilot" battery cell through a push-button switch.



Signal Corps tester is more complex than home-built one. It has scales for tropic, normal and arctic batteries, all of which have different specific gravities. It tests open-circuit, light-load, and cranking and charging voltages and battery freezing point.

hairline voltage changes instead of chemical variations in the electrolyte.

I built the tester, which is patterned after a Signal Corps design, for around \$3.50, using surplus parts. With it, I can:

 Check the charge in each cell more quickly and easily than with a hydrometer.

• See how the battery stands up when the starter sucks out juice in fast-draining gulps—and get a tip of future trouble.

My tester is a voltmeter, but it gets down to much finer readings than those you see in garages. Voltage may be a tip-off if you can read the difference between the 2.12 volts of a fully charged cell and the 2.00 (at no load) of a discharged one. On the ordinary low-range voltmeter this .12-volt range may move the needle only 1/16".

The Signal Corps meter overcomes this difficulty by using a "suppressed zero" and an "expanded scale." This means that the pointer doesn't move until the voltage climbs past 1.5 and that the useful part of the scale, between 2.00 and 2.12 volts, is stretched out to almost half the total length. My meter, too, is stretched out, and on the scale each tenth of a volt is divided into five readily visible parts.


Construction. I built my tester around a surplus item called an ANP-1 Indicator*. This originally was a radio-altimeter indicating device used in planes. You must adjust the hairspring arms to spread out the scale, wire a couple of resistors in the circuit to push the voltage range upward, and make a new scale and calibrate it.

If you can't borrow a good voltmeter to calibrate a new scale, you can get a good

^{*}I bought mine from Photocon Sales, 1060 N. Allen Ave., Pasadena 7, Calif.



1 Basis of tester is this surplus ANP-1 indicator, bought by mail for \$2.95. Basically it's a sensitive milliammeter.





3 Clip off all wires leading to the connector, after removing back cover. Take out one of the two switches that you'll find on back.



4 Unsolder the two leads from terminal strip to inside of case. Take out four flathead screws. Roundhead screws at rear release works.



5 Discard original dial and movable disk under it. Your new paper dial will be glued to the plain metal facing indicated here.



6 Scrape black paint off starshaped washer and off bottom bearing screws, using a sharp scriber. Then rotate upper hairspring arm fully counterclockwise, bottom one fully clockwise. This expands scale.



7 Insert tiny squares cut from new foam-rubber powder puff to cushion the two moving coil windings when they snap back to the low-scale position. This step is very important.



8 Connect parts as diagram shows and assemble on a panel. Calibrate a new scale as shown on next page after taping paper disk to meter face. (*Please turn page for finish of job.*)

idea of the open-circuit voltage points by checking several fully charged and discharged batteries with both a hydrometer and your tester. This will enable you to set enough points to complete the scale.


How it is used. The simplest test is to take readings across each of the three cells separately when there is no load on the battery. Experts do not agree on the value of this test, but I find it gives a quick report on how nearly charged the battery is (see voltage figures on next page). Never connect the meter across the whole battery; is volts will damage it.

Another procedure, the load test, is the best way of finding if a battery still has moxie. Warning of future failure shows up sooner on a load test than on an open-circuit one.

Simply take quick readings across each cell while the starter motor is turning the warm engine over with the ignition off. But make this test only if the battery specific gravity is 1.250 or higher. Don't run the starter more than 15 seconds at a time or you may damage it. The table on the next page shows you how to evaluate the voltage drop.



9 Best way to calibrate scale is to borrow a long-scale voltmeter, a potentiometer (about 0-1,000 ohms) and an adjustable rheostat (about 0-30 ohms). Hook these, the 25and 130-ohm series resistors and two dry cells to your meter as at right. Set slider of 25-ohm resistor to mid-position. Adjust potentiometer to bring pointer to about two o'elock on blank seale (left) with belock on bank scale (left) with exactly 2.00 volts going into meter. Mark the 2.00-volt point on dial. Then, to calibrate scale points above and below, adjust both potentiom-eter and rheostat. Mark points, remove dial and finish with India ink. Now assemble all parts on panel. As final step, again connect tester into calibrating circuit at right and adjust 25-ohm resistor to bring needle to 2.00-volt point after previously setting calibrating meter to 2.00-volts. Then clamp resistor slide permanently at this point.






Finished dial has two color lu scales, each divided into three parts. Color scale (left) beyond 2.00 volt mark shows poor, fair and good results for open-circuit tests. Color seale at left side of dial shows the same for cranking-load test.

Mounted in a case, the meter can be used this way to make open-circuit check of individual cells. For a cranking test, have helper step on the starter with ignition off.



| CAR BATTERY TESTS | | | | | | | | | | | | | | | | | | |
|--------------------|---|------------|-------|-------|-------|-------|-----------------------|-----------|-----------|------------|-----------------------------|----------------------------|-------|-------|-------|-------|--------|-------|
| Circuit | Battery Condition | Source: Si | | Fair | | Poor | Itage | Good | Fair | Poor | Points | Battery Will Freeze at: | 10°F. | 00. | -20° | -40° | °09- | -75° |
| Hydrometer or Open | Voltage (no load) | 2.12 | 2.10 | 2.05 | 2.03 | 2.00 | Cranking-Load Voltage | 1.66-1.48 | 1.48-1.32 | Below 1.32 | Electrolyte Freezing Points | Or Cell Voltage Is: | 1.89 | 2.03 | 2.05 | 2.08 | 2.10 | 2.11 |
| Hydrom | Specific Gravity (at 70° F.) | 1.280 | 1.260 | 1.210 | 1.180 | 1.150 | Crank | | | | Electrol | If Specific Gravity Is: | 1.141 | 1.182 | 1.214 | 1.232 | ,1.246 | 1.260 |
| | FOR YOUR POPULAR SCIENCE MONTHLY INFORMATION FILE | | | | | | | | | | | | | | | | | |

How to Travel Like a Gypsy

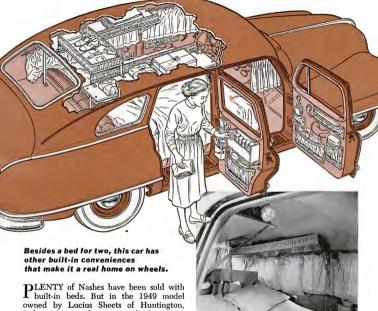

PLENTY of Nashes have been sold with built-in beds. But in the 1949 model owned by Lucius Sheets of Huntington, Ind., a place to sleep is just the beginning of home conveniences. He can live in his. On a gypsy tour, gas, oil and food are his only expenses.

The right rear door is the meal center. Containers for coffee, tea, salt, pepper, sugar and flour fit into a narrow plywood box mounted just below the window. Silverware goes into a small box below. Such items as paper towels, napkins, dish towels and a tablecloth are carried in the two pockets. Perishable food is packed into an insulated picnic box.

A piece of plywood, stored under the seat, hooks to two brackets under the food shelf and serves as a table. Mr. and Mrs. Sheets find standing to eat a restful change from sitting while riding.

ALL SET FOR THE NIGHT. Curtains are drawn for privacy, and light overhead gives illumination for reading in bed. Pajamas and such are tucked into pockets at head of bed.

Pockets on other doors hold miscellaneous items—stationery, pen and pencils, business papers, maps, magazines, screens for the car windows. Sliding curtains hang on \mathbb{K}" rods, giving night privacy.

The Sheets need no suitcases, for three shelves near the roof of the car offer space for clothing and toilet articles. The side shelves are 12" wide and 9' long. Elastic fabric keeps items on the shelves, which are supported by metal brackets.

END

Gus Gets the Pitch

"Hurry, hurry, hurry!" spieled the carnival pitchmen, but the Model Garageman kept stalling as mysteriously as their new car.

By Martin Bunn

A HORN honked impatiently outside the Model Garage.

"I'll get it," Gus called back to Stan Hicks, his helper. "You'd better stick with that valve job for Mr. Landsdowne."

Two cars were parked out on the concrete by the gasoline pumps. A frayed knotted tow rope linked them. Gus recognized the tow car as the battered coupe belonging to old Jim Barstow who ran a sizable farm about 10 miles out of town. The car being towed looked as if it had just left the showroom.

"Newfangled Buggy" Breaks Down

"Got customers for ya," greeted Barstow as he unhooked a piece of baling wire and pushed open his door. "Broke down on the road out by my back 10. Happened to be cultivatin' and offered to tow 'em in."

"Thanks, Jim."

"Yep, that's the trouble with these newfangled buggies," Barstow rambled on. "Too many gadgets to get out of kilter. Well, I'll be seein' va."

He tossed the tow rope into his car and clattered off down the road.

"Quite a character," said Gus with a chuckle to the two riders in the new car. "Now, how did your car happen to stall?"

"Just stalled, that's all," said the big man behind the wheel, in a voice like a saw sharpening a file.

"Yeah," echoed a small man sitting beside him, in equally rasping tones. "We were



"I'll just road-test it,"

breezin' along in fine style when all of a sudden no motor. It was like Chick, here, had turned off the ignition. I says to Chick—"

"Can the spiel, Sparks. We got no time for chatter. Let's get the car fixed and hit the road." He turned to Gus. "We're pitchmen, mister—you know, spielers—for the big carnival that's opening in the city and we gotta be there tonight to help stake out our act. Think you can help us in a hurry?"

"Try to," said Gus.

The big man eased his bulk out of the



said Gus, as he backed the car quickly out of the shop.

car and Gus slid in under the wheel. There was plenty of gas. The mileage showed less than 1,200—the car still had that new smell about it. But nothing would coax even a cough out of the engine.

Pitchman Tells Gus How to Fix It

"Let's push her into the shop," Gus said after a few tries, "where I can put some test instruments on her."

"Now, wait a minute," the man called Chick said. "This should be an easy thing to fix. I know a little about cars myself. It's

plain enough that the engine just ain't getting any gas. Trouble's obviously somewhere in the carburctor, the fuel pump or the feed line. You ought to be able to find it there quick enough. We ain't got time for a fancy tune-up, so just check the fuel system and get us moving as quick as you can, hulh?"

"You may be right," returned Gus evenly. "But I have to look a car over before I can spot the trouble."

"Okay, okay, let's get her inside."

The three men, with Gus reaching in

OCTOBER 1952 197



through the driver's window to steer, soon had the car parked beside Gus's bench.

"Ever have any trouble before?" asked

"Nope," answered Chick curtly.

"Been in a repair shop for a check-up?" "Nope."

As Gus rolled his test panel over, the pitchman moved away and began to pace the garage nervously. His little sidekick paced right along with him. They seemed to be discussing something important in confidential tones. Gus began checking the ignition system—he felt sure the trouble was there somewhere.

After a few minutes, the little guy, Sparks, called out: "Making any progress, Pop?" He looked at a potato-size gold watch anchored to his vest by a heavy gold chain.

Gus ignored the little spieler and kept about his work of checking every wire and connection. On the surface everything seemed perfect, yet the ignition system was completely dead. The test rig bore him out.

There was only one thing to do, check each unit separately, so Gus started out with the battery leads.

Gus's Behavior Mystifies Stan

"Got an oversize battery in here, haven't you?" he asked, tapping the case with the tip of his screwdriver.

"Yeah, yeah," Chick said shortly. "Do a lot of cold-weather driving. . . . But never mind that. Haven't you located the trouble vet?"

Gus was checking the distributor now and he had an odd gleam in his eye. "Listen, mister," he said finally, "give me a little time, will you? This engine is new to me-I've never worked on a model like it before."

Over in the corner of the garage where he was working on the Landsdowne car, Stan glanced up in surprise. What did Gus mean by saying he wasn't familiar with that car? Doc Hanson had one just like it and they'd had it in the shop for a tune-up only last week. Gus's voice sounded funny, tookind of Milguetoasty, as if he were extra anxious to please the big loud-talking pitch-

But it seemed to suit Chick. For the first time he sounded almost genial when he said, "Well, all right, old-timer, but shake it up, will you? We're busy men and time's a-wastin'.'

Road Test Rouses Carny Men's Wrath

Ten minutes later, after several trips to the stock room, Gus snapped the distributor cap into place and slid into the driver's seat. The engine started up smoothly.

'I'll just road-test it," he called out to the pitchmen and backed the car quickly out of the shop. Both men started to protest that they couldn't spare the time, but Gus was already headed down the road.

When Gus got back to the garage, he was greeted by two red-faced, fuming men, who, judging from the look on Stan Hicks' face, had been venting their anger on him.

"What's the idea?" Chick shouted, "You knew what a hurry we're in!"

"No idea. Just routine in this shop. We don't like customers to get a few miles down the road and find that what we thought we'd fixed isn't right after all. Matter of fact, she needs one more minor adjustment." Gus popped open the hood again. "Stan, come over here a minute, I've got a job for you." Gus whispered briefly. Stan nodded and left the garage.

After a few minutes Gus closed the hood again. "There she is, boys, as good as new.

That'll be \$12.50.'

"Well, it's about time," snapped Chick. The little fellow was already in the car when the big guv slid in and started backing out. Suddenly he stopped. "Hey," he yelled, "get that grease monkey of yours to back that tow truck out of the driveway. How in blazes do you expect me to back out?"


Stan climbed up into the driver's seat and

[Continued on page 246]


Hints from the Model Garage



Chucked in an electric drill, the gritty core of a pencil-type typewriter eraser makes it easy to touch up tiny rust spots on a car body without scratching the adjoining paint. The eraser will quickly remove the rust and clean the metal for painting.



A large baking pan kept in the trunk of your car is a neat container in which to place wet and muddy tire chains if you have to remove them along the road. Your wife may have an old battered pan that she would be willing to discard.




When draining coolant in cold weather, be sure a good stream runs freely from the block or you may have a costly freeze-up. If the water just dribbles out, remove the cock and use the blast from an air hose to loosen the sediment that can block drainage.




To pour antifreeze into the radiator from a large can, stand at the side of the car with the can extending into the engine compartment so that any dribbles get on the engine and not the body. The fluid won't hurt engine parts, but damages paint.


MORE Hints from the Model Garage







Oil consumption can be cut in a Crosley engine that has a cast-iron cylinder block by installing intake-valve seals just developed by the company. By removing the parts indicated, you can slip the neoprene sealing ring and steel retaining cup down against the guide. A screwdriver through the spark-plug hole will hold the valve up.



In repairing horn wiring, you can avoid the annoyance of frequent test blasts if you disconnect the wire leading to the horns and connect a test lamp to it and the battery. Use long leads to place the test lamp where it can be seen easily.



Drain holes in the base of a whip antenna sometimes get plugged with dirt, letting water accumulate in the tube. Poking a stiff wire through the holes will release the water and prevent possible interference with the operation of the radio.

Tests by experts show what special tires can do on snow and ice.

WINTER tires are a good buy if you don't expect too much of them. But they never will enable you to drive on snow and ice as freely as on a dry road.

When highways are slippery, tires have a tough time giving traction on hills, gripping the road when you apply the brakes and resisting corner skids.

Several years ago the National Safety Council set out to find how representative winter treads compare with conventional tires in these three jobs. Mounting winter tires on the rear wheels of the test cars, the drivers tried them out on all winter highway conditions you might encounter—glare ice, rough ice, loosely packed snow and hard-packed snow. After the tests, the Council announced that:

- Progress has been made toward producing safer winter tires.
- Several specialized tires show definite improvements for specific conditions, but the over-all improvement is not enough to warrant less care on slippery surfaces.
- Several show some improvement under specific conditions, but they are 30 better under other conditions—and in some cases even worse—than conventional-tread natural-rubber tires.
- Natural-rubber tires are generally better than cold-synthetic ones.
- For the greatest safety and best traction under severe snow and ice conditions you still should use chains.


Types of winter tires. For its tests, the National Safety Council classified winter tires into three groups—winterized tires.



DIRECTION OF ROTATION

is important with some mud-snow tires. If tread includes arrowshaped knobs or similar pattern, mount tire so that points of arrows touch pavement first when wheel turns forward. This will throw mud and snow out of tread instead of letting it accumulate to destroy tire's traction.





TACK MACHINE winterizes conventional tires by making thousands of tiny holes in tread rubber. Sharp edges of these holes increase traction but tires will wear out faster. Tires also are sometimes winterized by grooving and slitting tread rubber to divide it into squares.

mud-snow tires and winterized mud-snow tires.

Winterized tires are essentially conventional ribbed tires with salt, sawdust or other fine particles embedded in the tread or having fine cuts or lacerations in the tread. Mud-snow tires have a special tread design—deep treads, studs or knobs. The third type is a combination of the other two—mud-snow tires that have been given a winterizing treatment.

Which is best? For the individual, there is no easy answer to this question. A tire's performance cannot be judged by its tread pattern or appearance. Within each of the three types, the Safety Council found varying performances.

But on the basis of test-result averages, a set of winterized mud-snow tires would be your best bet for all-around use, with mud-snow tires next, and the winterized type last. On glare ice, rough ice, and loosely packed snow winterized mud-snow tires showed an average improvement of about 25 percent over conventional tires. On hard-packed snow they proved to be 17 percent better in stopping ability and 19 percent better in traction.

Winterized mud-snow tires lagged a bit behind straight winterized tires, however, in stopping ability on glare ice. Of the winterized tires, those with lacerated treads came out better on glare ice and loosely packed snow than those with embedded materials. But winterized tires had less traction ability on hard snow than even conventional tires.

Mud-snow tires, as their name suggests, are of greatest value in loose snow, mud and, to a lesser extent, on packed snow. In general, tires of this group give you no benefits on glare ice.

Synthetics excel on corners. As the base line for its comparisons, the Council used conventional natural-rubber tires.

These were compared, too, with coldsynthetic tires. On glare ice and loose snow, natural rubber was 10 percent better in stopping performance and from 16 to 50 percent superior in traction. In cornering ability on glare ice, however, cold synthetic was seven percent better.

Chains are best. Even the best winter tires do not begin to give you the safety and traction of a good pair of chains. In comparison with conventional tires, the Safety Council found that reinforced chains improved stopping ability an average of 46 percent while traction went up a whopping 473 percent. So carry chains for severe conditions, even if you have winter tires.

Tire chains can be divided into three types—regular, reinforced and emergency. Regular chains have cross chains of a twisted-link construction familiar for half a century. In the reinforced type, the central half-dozen or so links of the cross chains are twisted more or have projecting teeth welded on. Emergency chains are cross links that wrap around the tires as a means of getting out of a difficult spot, like a mud hole.

Reinforced chains are rated highest because the design gives more traction, the added material lengthens the life expectancy of the chains, and the welded pieces, usually placed crosswise on the links, reduce skidding.

How fast to drive? As a guide for motorists, the National Safety Council has converted its test results into equivalent speeds. Using chains, you would have to hold your speed under 25 m.p.h. on glare ice and 35 on packed snow to have the same stopping ability you would at 50 m.p.h. on dry concrete with conventional tires.

With tires, conventional or any of the winter types, you would have to drop down to 15 m.p.h. or less on glare ice and down to 27 or 30 on packed snow. Even so, you probably would still be traveling too fast for safety.

No rule can be made that will tell how fast it's safe to drive under all conditions. That's something only you can judge.

How to Drive on Snow and Ice

When your tires have trouble keeping their grip, these rules will help carry you safely to your destination.

Save This Issue for the Winter Ahead

Get the feel of the road when you first start out. Driving slowly on a stretch of traffic-free road or street where you won't hit other cars, apply the brakes quickly enough to cause the wheels to skid. This will give you a feeling of just how slippery the surface is. But don't depend too much on this. The nature of the road surface may change unexpectedly. Watch especially for patches of glare ice ahead.

Never change speed or direction suddenly. Take it easy. If you hit the gas hard or let the clutch in with a jerk, your tires will spin because they'll lose what frictional grip they had. If you lock the wheels in trying to stop, you'll slide. If you take a turn too fast, centrifugal force may throw you into a skid. On ice, the best traction will be obtained if you keep the wheels from slipping. Tests have shown that spinning the tires reduces traction as much as 50 percent.



Pump brakes rapidly when you stop. It takes practice to do this effectively. Try it out on a dry road. Experienced drivers can do it with the rapidity of a machine gun. Leaving the

drivers can do it with the rapidity of a machine gun. Leaving the clutch engaged, step on the brake, release it quickly and completely, and repeat the cycle until the car is so nearly stopped that you can keep the brake on and release clutch without causing a skid. Brakes must be in good condition so that they engage and release rapidly. In cars with conventional gearshift, there is a hazard in this method, however, Quick brake application may lock wheels momentarily. Since clutch is engaged, engine may stall, causing a bad skid. Skillful easing of the clutch may prevent stalling. This, too, deserves some practice on dry roads.


Adjust speed to road and weather conditions. On glare ice, with the best type of winter tires, it will take you around eight times as far to stop as on dry concrete. Even with chains the stopping distance is 35 times as far. On packed snow, tires will carry you three times as far as on dry concrete before you stop, chains twice as far.

Watch the thermometer. Around 32°-the freezing temperatureglare ice is twice as slipperv as it is at zero. This is because from about 25° up, the heat of tire friction spreads a thin film of water on the ice. In a series of tests, the National Safety Council found that stopping distances at 20 m.p.h. on glare ice may range from about 110 feet at zero to nearly 250 at temperatures near freezing. Council's tests of winter tires on glare ice described on the previous two pages were all made at a temperature of 20° to assure uniform slipperiness.



If you get stuck, you'll find it handy to have a short-handled shovel and a bag of sand, gravel or salt in the trunk. Don't wear out tires spinning them uselessly on a slippery surface. You can soon grind away a lot of rubber.

Bad driving conditions don't last forever. So, if at all possible, leave your car in the garage or travel another way.

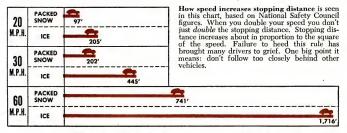

Save This Issue for the Winter Ahead

It's Easy to Put on Chains

When this job confronts you, knowing the right way will save you time and effort. Here are approved procedures.





1 If you can get your hands over top of tire, spread out chains on ground beside wheels, like this, removing tangles and putting fasteners at rear. Put outside of chain up.

2 Then put your hands under middle of the chain, lift it up and drape over tire, like this. Adjust so first cross chain touches road in front of tire. Drape opposite chain same way.



3 Drive vehicle forward until fasteners are about axle high or slightly under fender line. Then hold up both ends of chain to find proper links for hookup. Usually some end links must be dropped for proper hookup. Keep bottom cross chains straight across the tire.



4 Hook inside fastener into selected side chain link first. Then attach outside fastener, pulling chain as tight as possible by hand. Forcing a chain with tools or deflating and then inflating tires may damage tires. Chain should be free to work around tire.



1 Using a chain applier is best way if it's difficult to reach top of tire. Stretch out chains behind wheels, again with outside up and the fasteners to the rear. **2** Hang ends of chains on appliers and snap on the tires. Apply both chains at equal height and gather them close to tires as shown so they won't snag when car moves.

3 Roll car forward until fasteners are slightly under fender line (fender is removed here for clarity). Then remove applier, check for correct links and fasten chain tightly.

Foresight Assures Good Vision for the Winter

Save Ahead

When you drive under hazardous conditions you have to see danger before you can avoid it. These tips can help.



Carry windshield scraper in glove compartment to remove ice. Plastic scraper does good job without scratching glass. Garages and gas sta-

tions offer these as advertising giveaways. While parked, protect windshield with a cover, two squares of cardboard if nothing else.



Keep glass free of fog. When it tends to build up on inner surface of windshield, drive with vent pane open. Be sure the defroster is fully efficient. A sponge taped to back of one of your driving gloves will enable you to wipe windshield easily and quickly. But try to avoid driving with just a front peephole. Danger can come from the sides and rear, too.



Windshield wipers must exert more push to clear away snow. Weak wipers that serve satisfactorily during rain may stop completely when snow comes. So be sure that they are getting full vacuum, that the hose is good, that the mechanism is clean and oiled, that the blades make correct contact. Clean oil and scum from blades occasionally with a piece of cloth or paper.



Keep the headlights clean by washing away road spatter. And if ice builds up on windshield remember it may be blocking the light lenses, too. Don't let snow cover rear lamps.



If swirling snow or driving rain reduces visibility almost to zero, get off the highway. Chances are conditions will improve shortly. You are not in that much of a hurry.

OCTOBER 1952 705



There's plenty of space in most basements. Here's how to turn it into rooms that add to the pleasure and value of your home.

How to Make a Basement More Useful



END STUDS go up first. When they are placed under a steel beam make them a tight fit. Use level to plumb studs both ways.

PLATE should be a snug fit between the two end studs. Cut it long enough to be tapped into position and nail it to end studs.

SOLE also should be snug fit. Anchor it to concrete floor with cut steel nails. Then put up studs between the two end studs.

By Bernard Gladstone

O NE day I walked down into our basement and stumbled over an old suitcase. The barked shin wasn't pleasant, but it did start me looking at and thinking about the cellar.

Here was almost half of the cubic space of our home. Mostly it was being used—if you can call it that—as a general catch-all for junk, like the suitcase I had just kicked aside. Along one wall I had my workbench and power saw. In a corner was the heating unit. On the other side of the basement was the laundry. The area in between was either littered with odds and ends or wasn't used at all.

That did it. I gave the suitcase another kick for good measure, climbed back up the stairs and started planning.

The result of the planning and a couple of months' spare-time work was a real basement. Now, instead of a smörgasbord of junk, I've got the following: a big playroom, a combination laundry-darkroom, a combination utility-storage room, a shop, a big walk-in closet for storing off-season clothing, and another closet for the kids' toys. The playroom serves a double purpose—it gets the kids out from under foot on rainv days, and in the evenings it's a fine



spot to entertain friends. It is warm in the winter and cool in the summer.

Assessing your basement. Before you pick up a tool, stop and consider your basement. You'll find there are lots of points to think about.

• Is it big enough? This means both vertically and horizontally. If the cellar is little crypt to be crept into, you might as well forget it. But if it has adequate head-

room throughout most or all of it, you have a good start—especially if it's a full basement.

Is your basement damp? Naturally, if you find a spring under the basement floor, it can cost you plenty to seal off the water. (This happened to a friend of mine. He broke open the concrete floor where the water was seeping through, put in a sump pump and piped it outside to a ditch. He says the contractor promised him a full



TENPENNY NAILS driven in plate and bent over flange will hold plate to I beam. If beam is wood, nail through plate and into beam.



BOLTS through plate are another method of holding it to I beam. Use large washers under nut so they overlap flange.



PLATES that parallel but fall between joists can be secured by nailing them to short pieces that have been spiked between joists.



HORIZONTAL BLOCKING, also called firestopping and cats, is staggered so they can be end-nailed through the studs.



OBSTRUCTIONS should be utilized. Framing around projecting pipe will become corner table with removable top to get at waste plug.



BUILT-IN BENCHES flank corner table. Screws and angle bracket tie framework together. Cut steel nails anchor bottom pieces to floor.

basement and he would have it if it weren't for the pump.)

But if you have only some dampness—maybe a little seepage here and there—you probably can stop it by patching cracks with waterproof cement and giving the walls two coats of a waterproofing compound.

- What about pipes? Are they high enough or off to one side along a wall so they can be concealed, as mine were? Or do they have to be moved up between and through joists?
- Where are the basement windows? Outside light doesn't make any difference in a

darkroom, but windows are certainly nice in a shop or laundry. So consider window locations when you make your plans.

• Is your basement warm enough? Many of them are, the heating plant radiating enough heat to keep the area comfortable. Then, too, the walls and ceiling you'll put in will help hold basement heat. I didn't think my basement would be warm enough, so I stuck a couple of radiators in the playroom. As it has turned out, I've seldom used them.

Drawing plans. Lay out a simple floor plan, indicating walls, columns, laundry



SPOTLIGHTS, sometimes called "high hats," are best located between joists. Simple framing of scrap lumber will hold them in place.



FRAME around openings for fuse boxes, radiators, windows and doorways. Aluminum foil behind radiators will throw heat out into room.



SHEETS of plasterboard can be nailed overhead by one man with the help of a T made of twoby-threes to hold up one end of sheet.



TAPE AND CEMENT cover plasterboard joints. Cement is spread along joint and tape pressed over it. More cement covers the tape.

equipment and the heating plant. Figure out how many rooms you want and how big they will be. Indicate where you want doors, partitions, closets and electrical outlets. Play around with different ideas by inking in the basement outline and sketching in the various possibilities on tracing paper.

Framing and walls. Two-by-threes are plenty big enough for studs, soles and plates. After all, the walls you will put up are not bearing walls—only partitions. How far you space the studs depends on what you use for walls. However, most standard wall

coverings like plywood, plasterboard and hardboard come in 48" widths. This means that studs spaced on 16" centers—the usual spacing—will handle any of the standard boards.

I used Plankweld¹ for most of my walls. This comes in 16"-wide edge-grooved panels that lock together. The panels are made of various woods and are finished at the factory. You just put them up and have a finished wall—no painting or staining.

Wiring. In most towns it is acceptable for a homeowner to do his own wiring-

1. Made by United States Plywood Corp.

if he uses methods and materials that have been approved by local codes. Some communities also require a permit for electrical work and an inspection after it is finished.

Whether you have the work done or do it yourself, see that there are plenty of outlets (PSM, May '52, p. 210). And run separate circuits to shop motors, the washing machine and drier. Wiring, of course, must be done after the studding is up but before the walls and ceiling are installed.

As soon as I had my combination utilitystorage room walled, the first thing I did was to stow away the old suitcase. It didn't do much good, though. One of the kids dragged the suitcase back out and, of course, I fell over it again.

Finishing touches—trim, closets, built-in furniture, hiding pipes and columns—will be detailed next month.



PLYWOOD panels were unpacked and spread out leaning against walls. Then they were shifted for the most pleasing grain effect.



STARTING in a corner, edge of first Plankweld panel is face-nailed to a stud. I used ¾" No. 18 wire brads. Heads are slightly countersunk.



edge and nailed to the next stud. Clips should be spaced about 19" or 20" apart.

GROOVED EDGES of two panels overlap and lock together. The clips, hidden by panels, lock the grooves together tightly.







Hoe Extends Paintbrush



Stillwater, Okla.

For the occasional paint job that is too high to reach from the floor, clamp the brush handle to a hoe or long-handled other tool. This may save setting up a ladder for only a small area.—Hugh Lineback.

Suction Removes Wallpaper



Stubborn patches of wallpaper can be loosened with a plumber's suction cup. Just pump the cup repeatedly over the wet paper, as at left above. Another use is to help bond small plaster repairs (right). Fill the hole with patching plaster, force the cup over it, and then prv up one edge to kill the vacuum. Air pressure will force the patching material into all pores and crevices. -Kenneth Murray, Colon, Mich.

Toy Chest Closes Safely



No more pinched fingers or painful bumps when the lid of this tov chest is closed. The safety gimmick is a plungertype screen-door closer with the heavy spring removed. The light inner spring was left in place and nicely handles the weight of the lid. The closer is adjusted to lower the top slowly, eliminating slamming.-John G. Voelker, Towson, Md.



Month of October balmy days and autumn foliage, this is also the time to prepare in earnest for winter.

- Replace the screens with storm sash. and watch out for a stiff back in the bargain. Examine the weatherstripping, first checking the article on p. 230.
- Climb up on your roof for a thorough inspection. Look for loose shingles and nail down any you may find. Check trees for possible hazards over walks, driveway and utility lines. Ice storms or high winds can cause branches to snap, break-

ing light and phone lines. or even injuring someone. Clean leaves and twigs out of gutters, downspouts and drains. Examine the connections where gutters, leaders, downspouts and ground

drains meet. Make sure they are tight. Paint galvanized sheet metal and canvas roofing. See that exterior drains, area drains and catch basins are clear of debris.

 Repair worn electric cords. Tighten or replace electric plugs on appliances. Replace darkened lamb bulbs. Clean and oil electric fans before you put them away for the winter.



How to Prevent Plumbing Freeze-Ups

By E. F. Lindsley



DIGGING UP FROZEN LINES is no outdoor sport. Only insurance against it is to lay pipes well below frost line. If it happens, electric thawing may save you lots of work. But it should be done by experts.

Keep Jack Frost out of your plumbing and your pocketbook by looking around now to forestall cold-weather trouble.

I T SHOULDN'T happen to your worst enemy. So let's invent a fictitious joker we'll call Emil J. Coleslaw. Emil and his wife decide on a midwinter vacation. Lightheartedly they turn off the gas, shut down the furnace, leave a note for the milkman and go off. The weather goes from mild to bitter and back again. They return to find:

• They need a new furnace. The boiler froze and burst.

 So did a pipe in the basement, which is knee deep in water.

 One toilet bowl has come to the parting of the ways, in three parts.

 The cracked flush tank is leaking water onto plaster in the room below.

 A puddle under the automatic washer can be traced to its pump, which will never be the same again and must be replaced.
The electric well pump isn't working.

Although you won't have all the bad luck Emil did, even one chunk of it could be tough. The best job of pipe thawing is still the poorest kind of fun. So let's see what you can do to forestall those frozen-pipe blues.

Where is your lead-in? The lead to the house should be below the frost line, which varies from 1' in Florida to 9' in North Dakota. If somebody skimped on the pick-and-shovel detail, there isn't much you can do immediately except draw a map that will help you dig when there is snow on the ground, and pile insulating material along the route when the cold snaps are due.

Most freeze-ups occur when the bottom



SURPRISE LEAKS like these may be yours if you forget to shut off sill cocks for the winter. The first thaw tells the sad news. Valves seldom can be repaired, must be replaced. Hose can be ruined this way, too; drain and store it.

COLD-COUNTRY PRACTICE is to bring in a well lead through 4" casing welded into well casing. This conducts warm air from indoors to the pipe. A screen over casing keeps out mice.



drops out of the thermometer and a high wind is blowing. Make a note of all spots where pipes are exposed. You may find some under crawl spaces, close to door or window openings, running through outside walls or between the house and garage.

In a brief cold snap, it may be practical to set up a small electric heater, an infrared bulb, or even an ordinary lamp bulb rigged to reflect heat on the pipe. But remember that any heat may create a fire hazard.

Keep them warm. You can pack exposed pipes with rock wool, cover them with asbestos paper or cement, or warm them with heat from the house. A good dodge for pipes in outside walls is to run in hot air from a cellar duct, using a 3" conductor pipe up between the studs. So long as the furnace is going, the pipes will be safe.

Storm sash and weatherstripping can protect pipes running along a window opening. And don't shut off the heat in an unoccupied room if water pipes run through its

outside wall.

In a pinch, there is the old dodge of letting the water run. A trickle should be enough. But don't do this if you have an electric pump, or you may find yourself with a burned-out motor.

Sometimes an outdoor line can be fitted with a shutoff valve and vent at the inside end. Then the outlet end in the garage or barn can be left open and the water drained, provided the pipe was laid with some down pitch, as it should have been.

Pipe through a barnyard can be kept open by stacking active manure along it. Leaves and compost-heap material will also serve. Even dry straw, shavings, wood chips, crumbled cork or vermiculite will help when the weather is not extreme, especially if the snowfall is early. Snow piled over insulating material adds considerable warmth-keeping ability of its own.

Going away? First of all, make sure you have a tight shutoff valve in the main supply line. A leaky one may slowly feed water to the flush tanks, water heater or automatic washer you left drained. If pipe drains are left open, you may come home to a flooded basement.

Draining water left in plumbing is as important as shutting off the supply. Pictures on the following pages show how to empty pipes and protect tanks and traps.

Thaving a freeze-up. Once old man winter has taken a bite on one of your pipes, the problem is to thaw it out. Where

TIPS ON THAWING



HOT WATER poured on rags wrapped around the freeze-up is a safe, timehonored method. A pail below catches runoff. Photo or infrared lamps might turn the trick here, too.

BLOWIORCH works fast, but be sure to locate freeze-up and work from faucet end back toward supply. Heating back of a blockage creates a sealed "boiler" not healthy to stand next to. Fire is a real hazard when torch is used. Sheet metal held as shown will protect wood and other combustible surfaces.





FROZEN PIPE IN AN OUTSIDE WALL is hard to reach. Flame can't be used because of fire hazard, but hot air can. Hook vacuum-cleaner hose to blower side and insert end into a pipe pushed up between studs. Apply a blowtorch to the pipe, which heats the air.

the block is can often be determined by feeling with your hands for the coldest spot. If you see a crack there, be prepared to stop the flood after thawing. Should there be no shutoff valve in the line, you'll have to close the main valve as soon as the pipe is thawed.

Small cracks can be wrapped with rubber tape and further sealed with roofing compound. Rubber hose, split and wired tightly around the break, may hold for a time. But if the break is serious, better not thaw it until you're prepared to install new pipe or cap off the run. If a valve is damared, count on installing a new one.

What kind of heat? If the area around the pipe is still cold, first warm it up by whatever means you have. Even a portable oil stove will help make thawing easier and keep the pipe from freezing again.

Leave the water supply turned on while thawing, as the pressure will help unblock the pipe. A pail should be on hand to catch dribbles from a cracked pipe. Also open the faucet to show when water runs again.

Anything from a blowtorch to a hot-water bottle can melt ice, but the danger of fire should be kept in mind-there's no percentage in thawing a pipe by burning down the house. 'Always apply heat from the outlet end of the freeze, never behind it. Otherwise you'll expand water behind the block and may burst the pipe.

Can I thaw pipes underground? This can be tough. If hot water or steam can be

-WHEN YOU'RE GOING AWAY



SHUT OFF MAIN VALVE FIRST. This installation is poor because lead-in and valve shown will remain full of water and may freeze. Valve with drain is better, shutoff being made at street valve. Be sure house valve is fully closed; corrosion may cause faulty seating, but tapping stem will usually make it seal.



EMPIY TANK by flushing toilet after house water supply is shut off and pipe drains in cellar are open. Then remove water from bowl with a siphon or rags and pour in antifreeze as a seal against sewer gases. Open lavatory faucets to admit air and let water in pipes out through pipe drains.



ALL PIPES should have drains at low points so that they can be emptied. This one is part of the shutoff valve. Drains may be hidden by ducts or partitions. Be sure to find them all. Use a wire to clean out rust or scale that may keep some of the water from draining,

FREZEPROOF all traps under sinks and basins by opening plug to drain them. Be sure to add kerosene or other attifreeze to seal the traps against sewer gases. A one-to-three solution of alcohol, or low-grade lubricating or vegetable oil, may be used as antifreeze.



forced into the pipe, and the freeze-up is not too far away or extensive, it may thaw. The best bet is electric thawing. This calls for a heavy-duty are welder (don't plan on doing anything ingenious with your house current). It also calls for expert know-how.

If the main line is frozen hard, you will probably do well to call the water company or a welder who can come around with a 300-ampere portable generator. He can shoot high amperage through the pipe, which will heat it up all along because of its resistance to the current. And he'll be wise to the pitfalls of the procedure, which include the risk of setting up a parallel circuit in a gas pipe or of melting a lead pipe fitting.



IN MILD CLIMATES surface lines can be protected with insulating material and a water-shedding housing, here made of boards nailed into a trough form. Mica or vermiculite is cheap and, unlike straw, won't harbor vermin or lead them into the house. If snow falls, heap it up over the housing for extra insulation.



LOVE THAT AUTOMATIC WASHER? Then don't overlook water that may be left in the pump. If it freezes, the pump might be ruined. The easiest way to drain this one was to loosen its lower hose coupling as shown.



A WELL PUMP left full of water may freeze up and require costly repairs. Look for a drain valve or plug. Also open coupling at well to let water above soil drain back into well. Foot valve may hold some water in line.

DRAINING PLUMBING

Water left in pipes, traps, toilet bowls and flush tanks, washing machines or drains may freeze when a house is left unheated during cold weather. Even if an automatic heating system is left on, power or fuel failure may shut it down. It is

safest to shut off the water supply and drain all pipes and receptacles. Check action of shutoff valve to make certain it cuts the supply off positively, and does not allow water to seep back and refill the lines you have drained.

Check List

Shut off main supply valve at street or in cellar

Open all faucets Open pipe drains

Disconnect pipes without drains

Empty toilet flush tanks Remove water from toilet traps; add kero-

sene or other antifreeze

Drain sink and lavatory traps; add antifreeze

Drain steam boiler or hot-water heating system

Turn off gas or electric water heater

Drain water heater Drain water softener

Drain furnace humidifier

Drain water-fed home appliances such as washers and dishwashers

Drain supply pump and tank; shut off power to well pump

FOR YOUR POPULAR SCIENCE MONTHLY INFORMATION FILE

Craftsmen in Uniform



Bus into Auto-Home

The handsome motorized house at right started life as a 1941 Ford bus. Capt. Thomas A. Chrones, Air Force, stripped

the bus, cut it apart (above) and inserted a new center section, increasing the over-all length to 35°. He installed a complete bathroom and kitchen and laid a rubber-tile floor. The interior is lined with soun-glass



insulation, plywood-covered. The engine is a 112-hp. Mercury, His only power tools an 8" table saw and an electric drill, Captain Chrones spent 1,600 hours and \$3,100 on the job. He's at Lowry Base, Colo.



Plane Turret into Power Saw. A ball turret from the scrap heap of

an aircraft-salvage company supplied most of the parts for the 10" power saw at left. James Jurel, Chief Aviation Machinist's Mate, USN, got the idea from a new tool that he saw in PSM. The upright is extra-heavy pipe; the blade guard was the top of an oilcan. The saw will rip, cut off, shape, plow, rabbet, dado, disk-sand, wire-brush and grind. It has a 21" movement. Jurel spent \$7.50 on parts, other than motor, mandrel and blade.

Pictures in Leather. When M/Sgt. Ben P. Moody creates a picture he uses leather. The panel set into the top of the coffee table below was carved, then worked from

behind to raise the relief to 1". It is covered with glass. Sergeant Moody, in Germany with the Army Medical Corps, has twice won world-wide Army crafts contests.







et steam engine at left develops almost one horsepower when run at 1,500 r.p.m. with 100-lb. steam pressure. It stands just 7%" from base to top of cylinder cap, has a 1%" bore and a 1" stroke. The cylinder is cast iron; the standard, brass; the crankshaft, steel. Herest Grathwohl, Ma-

chinery Repairman Third Class, USN, machined parts from solid stock. Steam at 125-lb. pressure comes from a coal-fired 21tube copper boiler, also built by Grathwohl, who is serving aboard the USS Arcadia. The whole job, including a water pump, valves and accessories, took him a year's spare time.



Living-Room Photo Lab. Shown opened out ready for use, the portable darkroom setup above folds compactly into the central base unit when not needed. It was built by H. D. Stewart, Chief Parachute Rigger, Naval Air Station, Lakehurst, N. J.

King Midget Winner to Be Announced

Which of the many items that have appeared in this department since last spring do you consider the finest example of craftwork by a man in uniform? That's the question the judges are pondering


now. Next month their decision will be announced—and a King Midget automobile will be shipped immediately to the lucky fellow. The manufacturer will send it anywhere in the continental U.S.




One Man's Navy. When Lt. R. T. Higgins, USN, is not afloat for the Navy he can go to sea in his own craft—the 16' V-bottom inboard runabout above. It's framed with white oak, the planking is Douglas Fir, topsides and cockpit are mahogany. When stationed at Guantanamo, Cuba, Lieutenant Higgins spent 15 months of off-duty hours —plus three weeks' leave—on the project. A four-cylinder, 47-horse-power converted Hercules IXB-5 drives her at an estimated 25 knots.




Boy-Powered Crane. A young operator can climb into the cab of this "Kiddie Crane" and run it himself. Foot pedals rotate the carriage, raise the boom and maneuver the hook, separately or together. Lt. Comdr. J. V. Bartlett, of the Navy's Civil Engineer Corps, built the crane. He lives in Falls Church, Va.

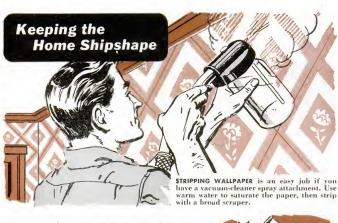





NO BASEMENT LAUNDRY TUB? A worn-out washer with works removed and hole plugged will do the same jobs. Install wall faucets for filling the tub; it will roll to the basement drain for emptying.





FOR CLEANING MIRRORS, a small screwdriver folded inside a chamois reaches into corners better than blunt fingers and cleans up to gluss edge without touching a delicate frame.





CHAMOIS SKINS for window and car washing can be cut from old jackets of thin suede. Clean the leather in heavy suds, then soak to remove any unfixed dye.



THIS FISHERMAN'S RACK is simple to make. It's just a strip of wood with headless clothespins inserted.

A TABLE TROUGH cut down from an old end table will keep the family reading tidily at hand. Or it will hold a generous supply of popcorn or fruit for between-meal snacks.


CHEAP STENCILS for spray painting jobs can be made from lace paper doilies. Cut apart and taped to the surface to be painted, they form borders or

How Karsh Pictures

Celebrities

Focusing on the famous took this Ottawa photographer to the top of the heap himself.

By Devon Francis



"Here I am, 8:07 in the morning," Lord Tedder, then Marshal of the Royal Air Force, grumbled to Karsh when he arrived for a sitting in London. "I'm late and I hate your guts."

Karsh has been similarly castigated, sometimes without overtones of affection, by John L. Lewis, Lord Beaverbrook and a fair percentage of the hundreds of other famous men he has etched on film in the last decade. He doesn't mind. In fact, he encourages it.

They All Pay Homage

And by some perverse alchemy the most difficult of his subjects wind up paying homage to him. It was Beaverbrook, by turns angry and arrogant at his sitting, who gave Karsh the ultimate accolade when he saw the results:

"Karsh, you have immortalized me."

Karsh has a gift for waspish riposte. Artur Rubinstein, the pianist, arriving in Ottawa at 1:30 in the morning, telephoned Karsh at home to say that his plane had been late.

"How long will this sitting take?" asked he impatiently.

"Until we are both exhausted!" snapped Karsh. It was a subdued Rubinstein who showed up: the studio a few hours later.

1...at's only one side of the man Karsh. By nature he is gentle. He abhors conflict. He is courteous to a fault. No man ever followed him through a doorway. His occasional barbed tongue is a product of his interminable worry over his work.

He is never satisfied. Before a major sitting he is likely to walk the floor all night. That, oddly, he finds is good—he is at his best when he is tired and taut.

The man who took the world-famous picture of Winston Churchill without his cigar is an artist, but he is more. He is an actor, psychologist and superb technician as well. Tailoring his mood to that of his subject, he can wheedle, glower in anger, coax, threaten or dissolve in speechless indignation, all in a matter of minutes. None of this is synthetic. It is a part of him.

How He Prepares for a Sitting

If there is any one secret to Karsh's success, it is his meticulous study of his subject before he loads his camera. He reads up voraciously on his man, sometimes for weeks, beforehand. When the time comes for the sitting, Karsh knows not only whether his subject reacts to a discussion of rural electrification or Renoir, but how, and what he eats for breakfast. More, he knows what expression will kindle the personality.

The faces of people seated before the



Pose of Churchill in belligerent mood in dark days of 1941 first put Karsh in the limelight.

OCTOBER 1952 22



HER MAJESTY Queen Elizabeth II, photographed by Karsh at Clarence House just before her North American tour—while she was still Her Royal Highness the Princess Elizabeth.



HUMPHREY BOGART. Instead of a villain of the films, Karsh found a gracious and suave host. "I found nothing of the rugged low-brow of his movie roles," said Karsh. "So I tried to portray him with the modulations of tone which bring out his interesting features,"

Karsh camera are brought alive by pointed questions from the man behind it. Photographing Jean Sibelius, the great Finnish composer, Karsh brought the magnificent face into relief by telling him how his fellow Finns obtained a rebirth of spirit in troubled hours by listening to his epic work Finlandia.

The resulting picture was good, but something was lacking. Karsh had not characterized his man. He was in agony. What was, wrong? Then, like a flash, he had it. Seeking words to express himself, Sibelius kept closing his eyes. Karsh caught him that way. Some critics consider it his finest picture.

How He Became a Photographer

The Karsh story is pure Horatio Alger— Immigrant Boy Makes Good. Born 44 years ago in Turkish Armenia at a time when massacres of Christians were politically fashionable, Karsh at 15 emigrated to Canada to live with an uncle named Nakash in Sherbrooke, Que. He wanted to be a doctor. The uncle was a photographer. Karsh began dabbling.

When he won \$50 in an amateur photo contest in Toronto, he was lost to medicine forever. Later he studied with the late John H. Garo in Boston. Aside from being a fine photographer, Garo was a man with a heart.

"I learned the humanities from him," remarks Karsh. "I also got a tremendous technical discipline—I learned light control."


Karsh established a little studio in the Dominion capital in 1933. He borrowed \$150 to buy his equipment. Business was slow. He had to ask his secretary for \$17 toward the first month's rent. Things rocked along indifferently for him until 1939 when he married a French girl named Solange Gauthier.

Churchill Portrait Made Him Famous

Madame Karsh had a shrewd business head. She also had charm and a flair for the dramatic. Business began picking up. Karsh began meeting the right people. Both the Karshes had been interested in the Ottawa Little Theater, where Karsh had been studying stage lighting from a camera standpoint, and it was there that he became acquainted with Lord Duncannon, son of the then governor general, Lord Bessborough.

Presently he had his first major assignment—photographing the governor general and his lady. Other big jobs followed. In 1941 he made the famous Churchill study,



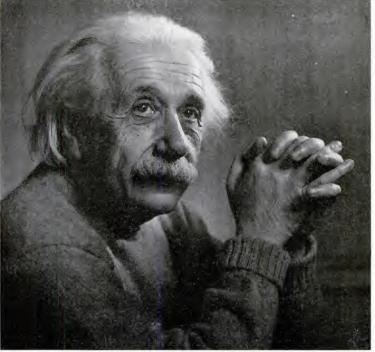

ALBERT EINSTEIN. Hands frequently are prominent in Karsh photos and that is how he chose

to portray the great mathematician in this eloquent portrait made at Princeton.

and almost overnight Karsh found himself not Yousuf Karsh, the Ottawa photographer; but Karsh of Ottawa, internationally known photographic portraitist.

Planning Is Torture

Yet planning a portrait is torture for him. He is haunted by the thought that he won't get what he wants. He is so profoundly affected in the midst of a big job that he has, on occasion, lost his voice. That happened when he photographed Pope Pius XII. His excitement reached such a pitch that he almost fainted.

Yet he can go home in the afternoon, an-

nounce that he is going to take a 45-minute nap, and sleep like a baby.

The Karsh home on the Rindeau river a few miles from Ottawa, with immense expanses of glass in the walls, is a show place. It is balm for his soul, from its big stands of white birches, Lombardy poplars, Norway weeping spruces and one European larch to the door on his two-car garage which opens automatically by radio signal when he flips a switch in his car.

None of his pictures adorns his walls. He says that nature provides better pictures through his windows than those he can make.

Karsh is on the road most of the time

OCTOBER 1952 773

taking pictures, and with him is Madame Karsh who doubles in brass as wife and business manager. When they return to the sanctuary of their home, called "Little Wings," he gets up at 4:30 in the morning just to roam over his five acres and listen to the birds and look at his trees.

He Also Makes Speeches

Despite only four months of formal Canadian schooling, Karsh has a command of the English language that would shame a native. His sentences have a poetic quality. In a recent speech—he is in great demand as a speaker—he said, "I had not the good fortune to be a son of this land."

To a class in press photography at Ohio's Kent State University last year he said:

"The portrait should tell not just that X has a heavy jaw and Y drooping eyelids; it should convey the message that here we have a man of will power, iron determination, singleness of purpose; that here is a thoughtful, perhaps calculating, perhaps careful man who weighs and ponders before he makes up his mind...

"There is infinite subtlety, limitless range in the shades of complex meanings lights and shade can produce. They are the portratist's tools . . . "

JEAN SIBELIUS, famous Finnish composer, has a habit of closing his eyes as he seeks words to express himself. Karsh selected this moment as most characteristic of the man. And of his own work: "My great hope is that these portraits will be considered as contemporary historical documents."

A linguist, Karsh is equally fluent in French and Arabic. But because he learned his English by ear, his spelling of it is phonetic and consequently abominable. His French and English come out with a Near East accent.

Karsh is as impeccable in his appearance as in his grammar. His attrie is simple but flawless. It clothes a dignity that produces anything but incongruity with his less-than-average height. Only his intimates feel secure in calling him by his first name.


Karsh of Ottawa is also Karsh of New York and London. He keeps identical equipment in the other two cities. When he takes a trip into the hinterlands, his gear folds neatly into half a dozen boxes weighing exactly 250 pounds.

He always travels by air. Arrived, he orders a suite with two bathrooms. One becomes a darkroom. He can't wait to get home to see how his pictures turn out.

The Karsh studio in Ottawa is in the Hardy Arcade at 130 Sparks St. At the Arcade entrance is a simple business announcement: "Karsh." A current portrait flanks it. The two-story building is a walk-

FRANK LLOYD WRIGHT. "Your wonderful portrait makes me the American Voltaire," the famous architect told Karsh. Smoking is one way Karsh gets his subjects to relax.







INGRID BERGMAN was completely "unmade up" when the Ottawa photographer visited her home for this informal picture.

up. In the second-floor directory, sand-wiched in among-such firms as Moto-Mix Concrete, Ltd., and the Bruce Coal Co., is the studio room number.

His reception room, with a red rug, is unpretentious. Somewhat small, it has panels of 15 representative Karsh portraits on three of its four walls.

Two tiny cubicles house Mrs. Joyce Large, his executive secretary, and Lois Muir, her assistant.

Occasionally, natives of Ottawa, affording no honor to one of their own, wander in to ask Karsh to develop snapshot film.

A stairway at the fourth wall leads to the studio proper. Except for screens, a table, a chair and two view cameras, the studio is bare. The larger of his two cameras is ivory-colored. He dislikes black cameras. He feels that they depress his subjects. For the same reason, his focusing cloth is crimson, lined with gold. His second camera is silvered.

How He Takes a Portrait

At work, Karsh sits his subject, arranges his lights and carries on a disarming patter of conversation. Dredging up astonishingly intimate bits of information about his subject that may have occurred as the merest fragment of an earlier conversation is part of his act.

"You like Drambuie," he says. "It has a piquaney." Then: "You hold your hands like this. It's part of you. Will you do that now?" Or, "You tilt your head when you listen. Try it." Or, "I want that animation in your face that you showed yesterday when we were discussing your faith."

It's things like that that bring the exclamation, "This picture is a wonderful likeness." It has to be. It's natural.

Now he loads his camera. Ostensibly he relaxes so his subject will relax.

"Did you know," he says,

"that you really have to be a Presbyterian to be a successful publisher?

Beaverbrook and Henry Luce and DeWitt Wallace are Presbyterians—"

Click! As his subject responds with a face lighted by an interest in what he says, he takes the picture.

Insists on His Own Way

Most always, he seats his subject uncomfortably.

"A person who is comfortable is not interesting," he says.

He is chary of taking too many pictures. "If you can't get a personality in the first 12 shots, the spontaneity is lost."

He is gently insistent on having his own way. A famous, aging actor asked him not to

[Continued on page 256]
OCTOBER 1952 225



Grease Threads to Stop Rust



KEEP the threads on adjustable basement posts well covered with cup grease. The grease will prevent rust and permit easier adjustment of the posts when needed.—H. Leeper, Canton, Ohio.

R.P.M. Counter Keeps Score

A TACHOMETER of the type used with a watch will also serve as a counter, to tally the number of persons or cars, say, that pass a given point. Bend one end of a narrow strip of metal into a loop that will be a push fit on the shaft of the counter (below). To use, flip the strip around once for each unit.—Ken Murray, Colon, Mich.



ALL 's CUTDOOR DLYWOOD DLYWOOD OF SECRET SIDES

A'COME TO PROCEED
Meter Is Neater in a Box

THE electric meter and its fuse box, crawling up the side of a house, are not exactly scenic assets, but they can be nicely concealed with an enclosure like this. You may have to alter the dimensions to suit the size of your meter and fuse box.—Hi Sibley, Nuevo, Calif.

Level Adapted to Suit Pitch



If you have a job that calls for a particular slope, you will save time by adapting a level for the slope. Taper one edge of a block to match the pitch. Then screw the level to the other edge of the block (above). Among the uses I've found for this dodge are laying drain tile, installing pipes, repairing a roof and building concrete forms.—Darrell Huff, Sonoma, Calif.

Bolt or Screw Serves as File

LACKING a round file for working on wood, plastic or soft metal, you often can substitute a bolt or large wood screw. To make it easy on your fingers, turn the first

few threads of the bolt or screw into a wooden handle.



PERSISTENT IN PERFECTION



Persistent in perfection, refrigeration equipment manufacturers like Carrier, Frick, Norge, York, Refrigeration Corporation of America have revolutionized the processing and preservation of food.

Your goal is a perfect job. Only the best of materials, the most careful workmanship, and the finest of tools are good enough for you. And you are quick to recognize the work of other <u>real</u> mechanics who, like yourself, are persistent in perfection.

Perfection is the standard to which Bonney wrenches are made. Mechanics call them America's finest—unmatched for lightness, strength, balance, and precision.

Bonney wrenches are the pride of the men who make them . . . the pride of the men who use them.

BONNEY FORGE & TOOL WORKS

Попроми Вописијисије



Today's most spectacular Home-Buy! This 3-Bedroom Ranch-Type House can be Yours for as Low as

\$8,995 to \$9,995*

IDERENDING ON LOCAL COST VARIATIONS

This new 3-bedroom National Home...the Saratoga Design, is the most outstanding home buy in America today. For beauty... livability...economy...durability and dollar-for-dollar value, no other home offers you so much for so little!

Look! Compare! Buy and Save!

*This home is built complete, ready for occupancy, on an insulated concrete floor. Cost of lot is not included. Wood floors with or without basement may be had at slight additional cost. National Homes are available in many different designs in 2-, 3-, and 4-bedroom sizes and may be had with porches, breezeways and garages.

Send 25c to Department PS1, National Homes Corporation, Lafayette, Indiana, for a copy of Your National Home Magazine, for complete information.



"National Homes prefabricated panels and structural parts are commended by Parents' Magazine as advertised therein."

©1952 N.H.C. TOOL HOLDER. Holes in one cup at right hold hand-grinder accessories. Cup inside another keeps jigsaw blades. Inner cup holds chuck wrench.



TOOL COOLER. For grinding without burning tool edges, make a hardboard or plywood holder with a hole for a water cup, and slot other end for a bolt.




GLUE GUN. Snip off tip of conical cup and use it as glue gun by rolling lip around pencil. Conical cup with tip cut off also makes funnel.



CATCHALLS. When doing overhead work, cups will catch drill chips and paint drips. Lid for glue cup can be made from disk of Mason-jar lid.

FLOCK GUN. Blow into the inlet to expel flock from upper tube. Rolled and glued paper makes the tubes. You have to hold the lid down when you blow.



There's a Place for

Paper Cups in Your Shop

Low-cost cups are naturals for dozens
of time- and work-saving shop jobs.

PUT paper cups to work in your shop. They are disposable and cheap. Unlike cans, they don't rust and unlike bottles, there is no cleaning bother.

They can be held to many surfaces by thumbtacks or they can be dropped into holes cut in thin wood or cardboard so you can carry them as kits. Besides holding small odds and ends, you can use the unwaxed type for mixing paints and the waxed ones for mixing glue.—Kenneth Murray, Colon, Mich.







SPUN GLASS (above) and wool felt are installed like calking-forced into openings around windows with edge of putty knife.



HAIR FELT is tacked to window frame so it presses against sash snugly but loosely enough to permit sash to be raised and lowered.



ZINC-AND-FELT type has felt backed by notched zinc strip. It can be bent to fit in corners. The zinc strip has holes for brads.

Now's the Time to Weatherstrip

Cut your fuel bill this winter by stopping heat leaks with weatherstripping. You can apply most types yourself.

CUPPOSE a wall of your home had a hole In it big enough to put your head through. You'd certainly waste no time in repairing it. Yet unless your home is weatherstripped, you already have the equivalent of such a heat leak.

Add up all the crack areas around windows and doors and that's about what they'll equal. A crack little more than 1/32" wide all around one large window is equivalent in area to a hole as big as your fist. And many loose-fitting windows and doors have

cracks wider than 1/32".

Storm windows are, of course, important -a must in many parts of the country. However, every window and door in your house should also be sealed with weatherstripping. A good weatherstrip job can reduce your heat loss by as much as 20 percent-even without storm windows.

There are many types of weatherstripping available at hardware stores or lumbervards. They can be separated into three basic groups, according to the service which they are designed to give. First, there are those intended for use only one year. Next there are semipermanent types, which last for some years under normal conditions. The third group, more costly to install, includes weatherstripping that is permanent. Temporary types. These include the

familiar hair-felt weatherstrip, one of the cheapest kinds. The felt should not be used on a window that will be raised frequently.

This material can also be used around entrances, though it does not stand up well on a frequently used door. It is installed in the same way as around a window. Just nail it to the door-stop molding so the door closes snugly against it.

Other types in this group include wool felt and spun glass. They are forced into cracks or seams like calking. Wool felt comes in rolls like hair felt, but generally is used to calk around loose-fitting windows which will not be opened until spring.

Spun glass-called Frost King Fiberglas' —is used to fill cracks in the same way. It is rot-proof and fireproof, and it expands after installation to form a tight seal. Use a dull putty knife, a wide-bladed screwdriver, or even the back of a table knife to tuck the spun glass in place. Both spun glass and wool felt are also used to keep loose-fitting windows and doors from rattling. Both of these are only temporary

1. Thermwell Products Co., 1261 Broadway, NYC.



DOOR BOTTOM is a rigid strip of brass and felt or zinc and felt that is screwed or nailed to bottom of door on the side toward which it opens.



WOOD-FELT type is bradded around windows and doors like molding. Corners should be mitered. This type can be painted to match trim.



SPONGE-RUBBER GASKET, like that around refrigerator doors, is tacked on cellar doors and windows and on garage door as shown above.

and must be removed the next time that the window or door is to be opened.

Semipermanent types. Zinc-stiffened felt comes in rolls with its own tacks and is suitable for almost all weatherstripping jobs. To install this around a door, tack it to the door-stop molding so that the felt presses snugly against the closed door. For a good fit, install this weatherstrip with the door closed. It is also best to install it all in one piece.

Start at the bottom of one side, work to the top, then across and down the other side. Drive the tacks into the holes in the zinc, making sure to put one into each hole.

A special type is made for the bottom of the door. Called door bottom, it is a wider, rigid strip, and comes in lengths of 32". 36" and 42". A bottom should generally be installed on the side of the door toward which it opens. Measure and snip the bottom to the length needed, less about ½". The felt should just touch the saddle when the door is closed.

Zinc-felt strip is fitted around a window



SELF-ADHERING WOOL FELT is particularly suitable for metal casement windows. It comes in a roll and is simply pressed on window jamb.



STEEL SPRINGS force the felt strip of Flexseal into contact with door or sash. Felt has been pulled out of channel to show springs.

in the same manner as hair felt. First tack it to the frame around the inside so that it bears against the sash, yet permits easy sliding. For the top sash it is generally better to tack it around the exterior of the window frame. If the weatherstrip were tacked around the inside of the top sash there would not be clearance between the two sash when the lower one was raised.

After tacking the weatherstrip in place around both the upper and lower sash, seal the crack between the top of the lower sash and the bottom of the upper sash when the window is closed. First tack a piece to the top of the bottom rail on the upper sash. The felt edge should be just about even with the inside edge of the upper sash. Then nail another piece to the top of the rail of the lower sash. The felt edge should touch the edge of the first piece when the window is closed.

In addition to zinc and felt there is also a rigid wood-and-felt stripping. It comes in 7' lengths and in various widths, from ½" to 1½" wide. The narrow ones are for windows, and the wider ones for doors and door bottoms. Since it can be painted, wood-and-felt stripping is less conspicuous than the zinc type. It costs a bit more than metal and is a little more work to install.

Another semipermanent weatherstrip is the sponge-rubber gasket. This is a welting of plastic-covered sponge-rubber with about \(\mathcal{K}'' \) of plastic on one side to give you a tacking surface.

This weatherstrip was developed for sealing car and refrigerator doors and was found to be so efficient and durable that it has gradually crept into use in homes. It is especially useful around cellar windows where grit and sand soon make the usual felt weatherstrip ineffective.

Another new weatherstrip, for metal casement windows, is a very thin, self-adhering, wool felt called Feltseal^a, that comes in 50° and 100′ rolls. It has a pressure sensitive adhesive on the back, and all you do is press it firmly right on the jamb, so that the edge of the window will close against it. Be sure that the metal is clean and dry. Start at the top and work your way down the side of the frame. When you reach the bottom use a razor blade or sharp knife to cut it off square. Then continue around the other sides,

Another new stripping—Flexseal³—is de-2. Thermwell Products Co., 1261 Broadway, NYC. 3. U.S. Weatherstrip, Inc., 24 W. Broadway, Salt Lake City 1.



SPRING BRONZE, a friction weatherstrip that doesn't show when both sash are closed, is installed in four steps: 1, in the channels in which the lower and upper sash ride (strips should be ½" longer than the sash is high);

2, on bottom edge of lower sash; 3, on top of upper sash; and 4, on inside edge of the lower rail of the upper sash. In first three steps, edge of spring bronze that has nail holes is faced toward inside of house.

signed to be nailed around windows and doors and consists of a strip of felt that rides on steel springs in an aluminum channel. The springs, pushing between the back of the channel and the felt, keep the felt strip in contact with the door or window.

Permanent types. Grooved weatherstrip is either a metal strip or track on the window casing which slides in a groove in the sash. In the case of a door it consists of two interlocking metal strips—one in the door casing, and one rabbeted into the door. With this goes a special metal weatherstrip saddle which locks with a strip on the bottom of the door.

These interlocking or sliding metal weatherstrips are efficient and permanent, but they are no job for the amateur to tackle, requiring special tools for a smooth installation.

Spring bronze is almost as good as the grooved type and can be installed by almost anyone. It is a permanent type of installation like the interlocking kind and requires nothing more than a pair of snips, a ruler and a hammer. It is available in 100' rolls, and also in sets of precut lengths.

Start by cutting pieces for the sides of the sash. Slip the strips into the exposed window channel, leaving 1/16" between the bottom end of the strip and the window sill. Then start nailing at the top with the rustproof nails provided, driving them into the holes in the strip. Position the strips in the channels so that the unnailed edge almost, but not quite, touches the divider between the window channels when the strip is pressed flat.

Drive nails into every other hole first, pressing the strip flat as you go. Then double back and drive nails into the remaining holes. This system prevents any buckling or warping of the bronze.

The piece for the inside edge of the lower rail of the upper sash should be ½" shorter than the width of the window. Fasten this with the nailed edge toward the top. Now close both halves of the window. This piece should just rub against the outside face of the lower half when the window is completely closed. If it doesn't, spring the grooved edge out slightly.

The installation of spring bronze around a door is equally simple. First cut side









DOORS can be fitted with spring bronze. Strips are nailed to jamb on sides and at top of door with springy edge toward door-stop molding.

STRIKE PLATE calls for careful fitting. Cut piece of spring bronze to fit between edge of strike plate and door-stop molding.

TIGHT-FITTING spring bronze can be loosened by tapping block held against it. If stripping is too tight, door or window is hard to open.

LOOSE-FITTING spring bronze can be made to fit by springing up unnailed edge with knife. Loose stripping lets air leak in and wastes heat.

pieces ½" shorter than the height of the door. Nail these in place against the door jamb. Put the nailed edge toward the direction in which the door opens, with the grooved edge near the door-stop molding. Work from the top down, and follow the same system of nailing as you did on the windows. Position the bronze strip so that when the

strip is pressed flat, as it would be when the door is closed, the unnailed edge will be as close as possible to the door stop without actually touching it. After fitting both of the sides, put a piece across the top of the door jamb. For the bottom of the door, use a zinc-and-felt door bottom.—Bernard Gladstone.





1. Liquid Sets Level Fast. Foundation building and other construction work is simplified with this level. It consists of a 50' transparent plastic tube that is filled with a red liquid. Above, the tool is shown being used to level a parking lot. Clamps that come with the level are fixed to uprights (inset). The liquid at both ends of the tube then gives a perfectly level line. By measuring from the ground to the liquid level in the glass, the degree of slope can be determined very quickly.



2. Junior Snake Cleans Drains. A brush on the end of a 42" flexible shaft clears clogged drains when you crank the wheel. As the drain begins to open, the shaft is pushed in farther. Pulling the shaft back and forth while cranking insures a thorough cleaning. The maker says it will open drains that are clogged by paper, hair, matches, hairpins and other small articles.



3. Window Has No Sash or Putty. Only one piece of hardware is used with this window—a pull latch that locks the window closed or partly open. The unit consists of precut redwood pieces that are nailed between studs to form a frame. Then the panes, which slide in grooves in the frame, are inserted. The unit comes, without glass, in 23 sizes.





4. Adhesive and Tape Join Carpeting. Flat, almost invisible seams are now possible when this fabric-and-paper tape and a rubber-base adhesive are used to join carpeting. Tacking and sewing are eliminated. Needle-like metal grips in the tape help hold the two pieces of carpeting together. First step (left above) is to lay tape

and apply adhesive. Then the first piece of carpet is pressed on tape and adhesive applied to edge of carpet to seal in the pile. Final step (right above) is to press the second piece of carpet down on tape and against the edge of first piece. The carpet can be walked on within an hour. Tape and adhesive are to be available soon.

5. Cans Clean Paint Rollers. Paint rollers are easy to clean with either of these two cans. Spin Clean (at left and center in photos at right) uses the old Yo-Yo principle. The roller is slipped on the spindle and put in the can. Then the cord is wound around the shaft. After each pull, the cord rewinds on the shaft.

After excess paint is spun off the roller, the paint is poured out of the can and solvent poured in the can. The roller is replaced and spun in the solvent until it is clean enough to be stored.

With Roller Cleaner (far right), the roller is placed in the can of solvent, the lid replaced, and the can shaken vigorously






for 30 seconds. After cleaning a roller, the solvent is allowed to stand until the paint settles to the bottom. The solvent then is poured off and the paint sediment cleaned from the bottom of the can. The solvent can be used again. If the roller with its axle won't fit in the can, the axle can be removed from the roller.



6. Two-Part Bit Drills Arcs. This bit is said to drill wood of any grain structure and at any angle without splitting it. Even arcs of a circle can be cut without tearing the wood. The ring and the cutter it encloses are both detachable so that they can be sharpened separately on a grinding wheel. A cone-shaped wheel is used to sharpen the ring and a standard wheel for the cutter.


 Levelall Co., El Webster St., Rockland, Mass.; 2. Home Necessities, Inc., 1129 S. Queen Anne Pl., Los Angeles 19; 3. Ernest Pierson Co., Eureka, Call.; 4. United States Rubber Co., 234 Fourth Ave., NYC; 5. Spin Clean Products Co., 379 N. 39th St., Mikusukee 8, and Wilson-Importal Co., 115 Chestrust St., Newark, N. 1; 6. PTI, Inc., 401 Broadsey, NYC.

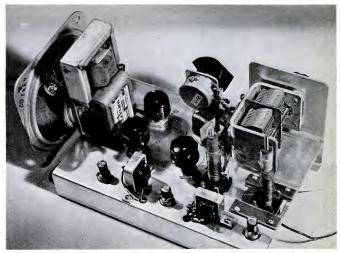

PREVIEW OF SETS TO COME, this tubeless receiver gives good headphone reception with three transistors and even works a speaker on local stations. Comparison of matchbook with transistors (in foreground, right) shows size. Sockets are behind.



Now You Can Build a Transistor Radio




DRILL HOLES for the sockets, insert them from beneath, and bend tabs over on top to hold them. Base lug is aligned with a looped clip that grips the transistor. Scratch the letters B, C and E on bottom of socket as wiring aid. Miracle crystals that need no A battery and last for years do the work of vacuum tubes in this experimental receiver.

By Howard G. McEntee

ANY experimenter's blood must tingle to the challenge of transistors—those tiny germanium gimmicks that make like vacuum tubes. They have so many advantages that they are sure to replace tubes in hundreds of applications (see page 134). Pint-size television sets and wrist-watch radios are likely to come when transistors take over.

But you needn't wait. You can buy at

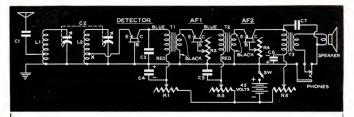

LIST OF PARTS

C1: .001-mfd. mica C2: two-gang tuning, 365 mmf.

per section C3: .01-mfd. mica C4, C6: 5-mfd., 100-volt midget electrolytic

C5, C7: .1-mfd. midget paper R1: 250,000-ohm potentiometer R2, R4: 500-ohm variable resistor

R3, R5: 10,000-ohm variable re-

rs, AS: 10,000-om variable re-sistor
L1, L2: Antenna colls (Miller A-121-A)
T1. T2: Midget plate-to-line transformers (UTC SO-3)
T3: Output transformer (Thordar-son 24554)

3" midget PM speaker (optional)

Transistors (Western Electric A-1698) 3 req. Transistor sockets (Cinch 54AZ17431) 3 req.

losed-circuit phone jack

SPST toggle switch Chassis, 1" by 4" by 6" (IC. Chassis, 1" by 4 29085) B Battery, 45 volts

least one type of transistor right now and build a radio that will work a speaker on strong stations. In the process you'll learn a lot about the latest thing in electronics.

Where to get them. Still costly compared to vacuum tubes, the cheapest transistors available will cost you about \$6.50 each from the Western Electric Co. at Allentown. Pa. These are point-contact transistors, not the latest junction type, and are made for computer and telephone circuits.

DISCARD COIL CASES and mount one coil adjustably on the chassis. The spacing shown gave best results; closer coupling produced double-hump tuning. As tuning condenser had no trimmers, the two circuits were aligned by moving coil slugs as shown, the screws in them being insulated with tape. Once aligned, slugs were held in sleeves with cellulose tape.

But they'll work a radio and will last for vears if not abused.


Still in the development stage, transistors have a higher noise level than tubes, draw more plate current (although no filament juice), and are far from uniform. Some work better as detectors, others as amplifiers. You take pot luck when you buy, but that's the price of experimenting-and part of the fun.

What's performance like? Although it won't replace your living-room superhet, this three-transistor set is fine for listening after others are asleep, or for keeping Junior occupied-and quiet-when he wakes up ahead of the rest of the family.

Headphone volume is all you could want, and reception is dependable. Speaker volume is modest, suitable only for quiet locations. Because of the high noise level (heard as a hiss), the set must have a strong signal. It requires a good antenna and ground.

Building the rig. An ordinary aluminum chassis is the backbone of the set. The tuning condenser and R1 (which serves as a volume control) are mounted on a plate attached to the front of the chassis.

Sockets for transistors are made by the Cinch Mfg. Corp., Chicago 24, Ill. If you don't want to wait for them, you can mount one end of an ordinary automobile-fuse clip to hold each transistor and bend tiny clips of spring brass to grip the prongs. Don't solder leads directly to the prongs. The heat will ruin the crystal.



UNDER-CHASSIS VIEW shows sliding mount for first coil (L1) and the four adjustable resistors. Once set, these will require no further adjustment unless transistors are changed.

Mount the interstage transformers at right angles as usual. Those shown are midget plate-to-line units, mounted with aluminum strips. But ordinary 3-to-1 audio transformers will do as well. If you care to dispense with the speaker, you can save the price of the output transformer, too. Use high-impedance magnetic earphones for best reception.

Two tuning coils give excellent selectivity. If you are in a fringe area, you may not need that much, and can use a single coil, hooking the antenna to the tap marked X in the drawing.

Watch your polarity. That positive ground shown in the diagram is no mistake. Be sure you ground the plus side of the power supply. If you follow tube practice and ground the negative, you'll be out of business to the tune of three ruined transistors. For this reason a polarized battery plug is a good idea.

The interstage transformers are also hooked up backwards from what they would be in a tube circuit. The low-impedance winding goes to the emitter (which in this circuit acts like a grid) and the high-impedance side to the collector (or plate equivalent).

The electrolytic condensers C4 and C6 must as usual be installed with due respect to polarity. If they have metal cases, these will be negative, so insulate them from the positive chassis with a wrapping of cellulose tape.

Checking transistors. If you have a zero-to-10 milliammeter, connect it in series with the battery to try out the set. With

R2 and R4 at zero resistance, and R1, R3 and R5 about midway, put only the second AF transistor in. Turn R5 slowly toward zero until the meter reads two milliamps and leave it there.

Then insert the first AF transistor and finally the detector, adjusting R3 and R1 in turn to give a total of 4 and 6 ma. respec-

Lacking a milliammeter, you can listen with the earphones as you adjust the resistors. A loud click and a sharp reduction in hiss indicate the point at which plate current shoots up. Back off the resistors below this point, for no signal will pass above it.

With all transistors in, you should hear a loud hiss. Hold the antenna temporarily at X on coil L2 to tune in a station. Then transfer the antenna to C1 and move the core of L1 or L2, or adjust the trimmers if the tuning condenser has them, until the signal comes through at maximum strength.

Finally, adjust the five resistors to give maximum volume. Once set, the chassismounted ones won't have to be changed unless you shift transistors around.

Try them all ways. Be sure to try each transistor in each of the three positions. Some work much better as a detector than others. Some seem to oscillate strongly, and R1 may be turned to a point at which the collector current suddenly jumps. Just before this the signal gets much louder, as in regenerative circuits.

If you use a speaker, be sure to mount it on a baffle. A square foot of corrugated cardboard with a 3" hole in the center adds surprisingly to the volume.

Since even distant lightning may induce enough current in an aerial to burn out the transistors, it's a good idea to disconnect the set when you are not listening.



On his circular saw Dan McCrumb Meant to cut a cleat square and quite plumb. But guess what the hitch is That left him in stitches . . . He backed up the kerf with his thumb.



Foot Feeds Cutting Oil. A salvaged auto fuel pump and some angle brackets will feed cutting lubricant to your lathe or drill press. This foot-powered rig spouts juice only at the time you want it, leaving the work clear when you want to see what's going on.

Bolt the pump to two husky brackets on a wooden baseboard. Mount a third bracket at right angles so that the pedal lever can be pivoted on it and will press up the diaphragm linkage from bencath. (On the pump shown, the linkage is exposed by removing a cover plate.) Add a short spring to pull back the lever originally worked by the engine camshaft.

The intake hose is dropped in a can of cutting fluid set on the floor. For drilling, a cheap hollow-handled glue brush makes a good applicator. Just slip the delivery hose on the handle.—Floyd McGuckin, Ridge-tood, N.J.





Rods Mike Big Diameters. One telescoping gauge with a %" to 1%" range, plus homemade extension rods and a 2" micrometer, will give precision measurements to 6" and check taper and out-of-round in holes up to that size.

The set shown consists of seven rods ½" to 3½" long, in ½" steps. Cut them slightly over length from 3 16" drill rod, and turn a small radius on each end. Lap to length

SEGN 5/32 TO PIN NUT ON NOT THE BLAD PIN NUT ON NOT PER SECOND SO APPART

NULUBLA TOTHER END PIN NUT ON NOT PER SECOND SO APPART

NULUBLA TOTHER END SO APPART

NULUBLA TOTHER END SO APPART

NULUBLA TOTHER END SO APPART

with an oilstone, removing the rod from the lathe often to check length with a large micrometer or vernier calipers. If you start with the longest, any lapped undersize can be salvaged for the next smaller.

Thread the coupling body full length first. Drill and ream the two bores, turn the end tapers, and cut off. Cut four slots from each end within 1/16" of the center, offseting those at one end 45° from those at the other.


Drill the closers tapping size not quite through; then drill clearance size for the rod or gauge leg. Run a 5:16"-32 bottoming tap within 1/16" of the end. Knurl and taper if desired, and cut off.

The connector is simply reamed 3/16" and slotted for spring tension in the same way as the coupling. As the photo shows, the coupling connects one rod to the gauge, and the connector adds a second rod if necessary.

Hold the assembly as in the photo at left above when you take a reading.



Brush Blows Clean Files. Lead and other soft material hard to remove from file teeth will usually surrender if you use a wire brush like a hammer. Rest the file on a solid support. Swing the brush so that the wire bristles strike the file at an angle of about 45° and approximately in line with the cut of the teeth, A minute or so of this usually cures the most stubborn case of clogging.—Walter E. Burton, Akron.



Dual Saws Speed Slotting. This arbor holds two slotting saws at once and saves setup time. Just push it into the spindle and you can cut slots of two sizes. Two such arbors, with saws .020", .030", .040" and .050" thick permanently mounted on them, will do almost any slitting job that turns up. With a suitable collar, two precisely spaced cuts can be made at once.

Turn the shoulder a close fit for saws, and be sure all collar faces are square so that the saws run without wobble. Use the thinner saw on the outside.

Steady-Rest Lube System. Intent on a lathe job, you can easily forget to oil work in the steady rest—until it overheats and scores. To solve that, put a grease cup on the upper pad of each steady rest.

A hole is drilled in the pad to make a force fit for a short steel rod. The rod is tapped for a standard grease cup and drilled through. A second grease passage is drilled up from the work-bearing end of the pad. Cut at an angle, the rod is driven to this passage.

Grease melts and flows faster than oil if the work heats up, and so compensates for any oversight.—Clifford T. Bower, London.




Self-Renewing Scriber. A scriber you'll never find dull is easily turned from drill rod. Knurl the knob for easy handling; then face and recess. After hardening, lap the bottom on an oilstone or with compound.

The drawing shows how the scriber is used with gauge blocks to scribe dimension lines from one face of the work. Since the entire circumference scribes, a turn renews the edge.—A. R. Morgan, Naugatuck, Conn.



Pliers for Knurled Nuts. Sometimes a stubborn knurled part must be turned with pliers. Copper slip-on jaws are commonly used on pliers to prevent marring, but aluminum pliers are surer and make a nice addition to your tool rack.

Take apart a pair of ordinary pliers and fill the hole or slot in one leg with wood putty. Use this leg as a pattern to cast two of aluminum. Since the usual slip-joint slot would wear fast in such soft metal, drill two holes in one leg instead. For the wide-jaw setting, switch the pivot bolt.



X New Tools

Turret Head for Drill Press.
Drilling, reaming and tapping or sequence drilling can be done rapidly on a single drill press when this three-spindle turret head is used. It is indexed with a handle in front that can be turned without stopping the motor. An adjustable torque-control clutch on one spindle protects taps, and speed can be varied at each spindle to suit the tool being used. Capacity of all spindles is %".



2 Acetylene Torch Is Automatic. Squeezing the spring-loaded trigger of this torch opens the gas valve and also sparks a heavy-duty flint for ignition. Releasing the trigger shuts off the flame. For a continuous flame, the trigger can be locked open. The torch is said to be especially suited for on-and-off work such as in many plumbing, heating and refrigeration jobs, and for loosening nuts and bolts, removing paint or heating tile mastic.

3 Clamp Holds Miters for Joining. Miter and butt joints can be held securely for joining with this 7" by 7" corner clamp. It also will serve as a glue clamp for setting mortise and tenon joints. Made of steel, it takes stock up to 2½" wide. The sides, top and bottom are open for nailing.

4 Screwdriver Set. These six magnetized screwdrivers range in size from a %" by 2%" blade to a %" by 8" blade and carry an unconditional guarantee for replacement of any of them that are broken in use. The plastic handles are shatterproof. The set is priced at \$2.49.





242 POPULAR SCIENCE






5 Easy to Extract.
To remove one of these new staples, you bend it and it snaps at the nick in the center. The halves then come out easily. The

staples were designed especially for use on fabric, but can be used as conventional fasteners. The stapling gun swings open for use as a tacker.



6 Tool Sharpens and Sets. Planer and jointer knives, plane irons, circular-saw blades and wood chisels can be sharpened with the Sharp-Smith. It takes saw blades from 4" to 48" and planer and jointer knives up to 24" in length. It has positive setting action to grind each tooth or blade uniformly.



7 Saw Has Kickproof Clutch. The friction clutch in this saw lets the motor turn even though the blade binds in the cut. It comes in two models—with a 7½" blade and a 2½" depth of cut and an 8" blade, 2½" depth of cut. Both operate at 4,500 r.p.m. under load. Weights are 15 lb. and 17 lb. respectively.

8 Long-Distance Drill. Holes from %" to 1" can be bored through 27" of studding or joists or through 56" of solid wood with this boring set. Extensions of 6" or 12" lengths can be added without removing the bit from the work. The set includes four bits -%", %", %" and 1". The points of the bits have a front rake which, it is said, requires from half to a third less power. According to the maker, a %" drill will operate the tool. Because of the rake, the



Further information on these products can be obtained from: 1. Commander Mg. Co., 4225 W. Kiraic St., Chicago 24; 2. Felox. is Power Fool Co., 7595 Thomas Bird., Pittisongh 8; 3. Eagle Products, Ros 844, Meriden, Coma; 4. Every Products, Ros 841, Merrick, N.Y.; 5. Speed Products Co., 320 (Queens Bird., Long Island Clirt I, N.Y.; 6. Belsum Machinery Co., 315 Westport Rd., Kannas City; 2, Mor.; P. Porter-Cable Machine Co., Syracuse 8, N.Y.; 8. Time Sweer Tools, Inc., Mundelein, Ill.

Developing, Printing, Enlarging ... a fascinating hobby



So easy to begin, too-and inexpensive

DID YOU KNOW that Kodak offers a complete printing kit for only \$4.95 (see opposite page)—that for this small amount you can have the thrill of making prints from your own negatives? Taking the picture is really only half the fun. Developing and printing can double your enjoyment from photography. And for less than \$50 you can acquire a fine enlarger that will let you select the ideal portion of your picture ... eliminate unwanted areas ... make the final print even more than what you hoped for when you clicked your camera shutter.

On these pages you see just a few examples of a wide choice of equipment now on display at your Kodak dealer's. He will be glad to start you off right and help to keep you within your budget.



Complete enlarger — less than \$50. The Kodak Hobbyist Enlarger uses cold-light illumination—perfect protection for negatives. Only reflected light reaches negatives. Integrating-sphere lamphouse, together with specially created interior reflective coating, results in even light distribution. Newly designed negative carrier loads easily. Knobs are provided for locking both elevation and focus. Enlarges up to 7 times. Kodak Enlarging Ektanon Lens, 89mm., f/6.3, helps produce crisp, sharp enlargements. For negatives through 2½" x 3½", 544.



Fine, versatile enlarger—the Kodak "Flurolite"—\$99.50 (without lens). Advanced design . . . integrating-sphere light source for even illumination . . . easy-loading rotary negative carrier. Focusing and elevating knobs may be used at the same time. With accessories, the 2½" x 3¾" "Flurolite" quickly converts for copying and many other uses.



Eliminate unwanted areas in enlargements— Select ideal portions with the help of Kodak Masking Easel, 11 x 14. For use with any vertical enlarger. Can be adjusted for 4- to %-inch margins. \$9.60.



Everything you need for printing—Kodacraft Printing Kit contains rocker-type trays, printing frame, paper, graduate, Kodak Tri-Chem Pack, thermometer, stirring rod. \$4.95.



For developing and printing — Kodacraft Photo-Lab Outfit includes printing frame with masks for popular negative sizes, Kodacraft Roll-Film Tank, other essentials, \$8.75.



Includes metal printer — Kodacraft Advanced Photo-Lab offers complete developing and printing equipment. Everything can be packed in printer for handy storage. \$14.10.



Converts ordinary tray into effective washer— Kodak Automatic Tray Siphon. Washes prints and films automatically. Hypo-laden water is siphoned out as fresh water enters. \$4.50.



Kodacraft Roll-Film Tank (left) is easy to load, pour; holds 16 oz. of solution. After loading, it can be used in lighted room. Includes aprons for 620-120, 616-116, and 127 films. \$2.53. Kodacraft Miniature Roll-Film Tank (right) permits simultaneous development of two rolls of 35 mm. film or Bantam-size film (828). \$2.53.





A Safelight that adjusts quickly—Kodak Adjustable Safelight Lamp (left) has double-swiveled shank and bracket. \$7.40. The new Kodak 2-Way Safelamp (right) provides either direct or indirect illumination—or both. For light in two directions, simply take out removable metal panel in back and replace with a safelight filter. \$4.50.



Kodacraft Metal Printer, Model A-accepts negatives from 35mm. up to 4 x 6 inches. Metal construction with hinged platen. An easy-to-follow folder of instructions is supplied. \$6.95.



For timing contact and projection printing — Kodak Electric Time Control. The printer or enlarger plugs into the control. Automatic timing 1 to 57 seconds. Repeat timing possible. \$13.50.



Spring-wound Kodak Timer—covers all intervals up to 60 minutes, has both minute and split-second hands. Tilting base permits adjustment to any angle. \$7.20.

Your Kodak dealer will be glad to demonstrate this equipment for you. Make his store your headquarters for all your photo needs.

Prices subject to change without notice

EASTMAN KODAK COMPANY, ROCHESTER 4, N.Y.

Kodak

started the engine. As the tow truck eased back out of the way it revealed a state police car also parked crosswise of the en-

Sgt. Ierry Corcoran was standing in front of it with his right hand resting firmly on

the butt of his gun.

"Okay, you fellows," ordered Jerry, "might as well make it easy for all of us. Slide out of the car with your hands in back of your heads."

Gus Gives Stan the Inside Dope

At that moment, two more state cops appeared from behind the tow truck and had handcuffs on the startled pair before

they knew what was happening.

"Thanks a million, Gus," said Jerry, after he'd herded the handcuffed pair into their own car with a trooper at the wheel and another in the back seat. Then he climbed into the police car and started the engine.

"What gives with the carnival guvs?" asked Stan as he and Gus watched the twocar caravan pull away. "Fleece a local vokel

at the last stand?"

"Nothing as simple as that," said Gus. "That car of theirs has more built-in secret compartments than a Chinese puzzle chest." "Iewel smugglers?"

"Dope peddlers."

"Then they weren't really carnival men at all."

Pitchmen Put Up a Good Front

"Sure they were. They've been using that as a front to sell dope to local peddlers around the country. That car of theirs is a rolling narcotics warehouse."

"Gosh, how did you spot it?"

"Well, if the trouble hadn't been in the ignition I probably wouldn't have stumbled on it. In checking it over on the first goaround, it seemed as if everything was oversize-the battery, the oil cleaner, even the coil. Incidentally, the trouble was in the distributor."

"What was it?"

"You know that small carbon brush in the center terminal of the distributor cap that serves as the contact for the spring on top of the rotor?"

Stan nodded.

"Well, it had cracked and a piece of it had dropped down into the breaker-arm assembly. It was shorting out the breaker arm. and keeping the breaker points from closing.

What was suspicious about that?"

"Nothing. But after I dislodged the piece and began replacing the broken brush with a new one, the coil caught my eye. I noticed that it seemed higher than most. I twisted the top and it came off in my hands. The outer shell was a very neat dummy. Inside was a standard coil and wedged in around it were dozens of tiny white paper packets.'

'And that's when you decided to road-test

the car," put in Stan.

Gus Helps Smash a Syndicate

"Right. I wanted Jerry and the boys at the barracks to back me up. The paper packets contained dope, all right-uncut heroin' they said-and a concealed drawer at the back end of the battery case was filled with marijuana. What the narcotics boys'll find when they really go to work on it is anybody's guess."

'Nice haul for Jerry," said Stan.

"Oh, both the state and the federal boys knew that some syndicate was doing a fast job of distributing dope around the country, but they didn't know about this car. Now they think there might be more than one, part of a big network run by some mechanically minded guy who thought up this gimmick of stashing the dope away in car parts rather than under the seats and in built-in compartments cops are wise to."

Sometimes It Pays to Play Dumb

"But wouldn't any wise mechanic like you catch on?"

They probably have their own garage where they go for repairs, most likely the same place where the changes are made. Fortunately, the mechanic, whoever he is, cracked that distributor brush." Gus grinned. "And maybe you noticed I played kind of dumb."

You sure did. Maybe you ought to be in show business yourself."

Next month: Gus goes hunting for trouble.

Tipsy Tip

A guy went into a bar and ordered three buckets of beer for his horse, hitched outside. Bartender says, "All that beer for the horse? How about you?" "Not me," says the guy, "I'm driving." -Clues.



sure to be "the HIT of Your Kit"

The SARGENT PARALLEL-ACTION PLIER!

(The Mechanical Hand)

What a plier! Actually three tools in one . . . plier, wrench, and wire cutter.

You'll quickly discover this Sargent to be the most useful tool you've ever had for jobs around the house.

Look what it does:

1. Grips like a vise

... compound leverage multiplies power along entire length of the parallel jaws.



2. Cuts wire easily

. outside cutters cut wire even when it tightly hugs a flat surface.



in close quarters.

Go to your hardware dealer . . get your hands on one of these sturdy,

all-purpose tools. You'll never let it go . . . especially when you hear

For further details, write Dept. 26 K!

3. Holds nuts like a wrench

powerful parallel jaws and extra leverage prevent rounding corners.

4. Gets into tight spots Small nose permits probing

.. and gets you out of them.

Unkinks wire

.. open throat permits running the wire between jaws, from either end, to straighten or pull it.

its price. You'll be delighted with your low-cost investment in a highgrade plier. Available in 4½", 5½", 6½" and 8" lengths.

Sargent and Company, New York · NEW HAVEN, CONN. · Chicago


Builders Hardware and Fine Tools since 1864

OCTOBER 1952 247



Care and Feedina of Engines BY S. P. CORP

THE CASE OF THE SLOW WINDSHIELD WIPER Most cars have a windshield wiper booster pump mounted on the fuel pump. Any time your wiper operates at less than 80 strokes per minute, check this



affect engine operation. For example, an air leak in the vacuum line (see arrows) will cause a lean mixture at the end of the intake manifold, making the engine miss when idling.

neglected, will cause sluggishness in the valves of the end cylinder, eventually burn-

ing the valve seats.

Remove vacuum line at intake manifold. Plug the hole in the manifold and run the engine. If engine idles smoothly (when it missed before) the trouble is in booster pump or vacuum line. If there is any trace of oil in the line, your booster pump needs a new diaphragm—because a cracked or damaged diaphragm has been causing oil waste. The oil you see has been sucked up from the crankcase and delivered to the intake manifold, to be burned with fuel.

If your windshield wiper seems slow, at any engine speed, check the booster pump!

TEST SHOCK ABSORBERS

Shock absorber trouble can cause hard steering, pitching on turns, and hard riding. Check each corner by trying to bounce the car, holding the end of a bumper. If it bounces several times before coming to rest, the shock absorbers need attention. To remove, take off upper and lower holding nuts from rubber bushing on studs. Lock lower end of absorber in a vise, and pump up and down full length of travel. If it sticks at any point, or is hard to pull, it should be replaced. If there is no resistance, valves are leaky and it should be replaced. Normally, there should be more resistance in extending than in compressing.

NEW FREE BOOK ON CAR CARE

Send for your free copy of the new illustrated booklet, "MORE POWER, Less Oil, Less Gas" which tells you how to keep your car running better. It also tells you all about Sealed Power Kromex Ring Sets, engineered especially to fight heat, friction, abrasion, and corroneat, friction, abrasion, and corrosion in late-model cars and trucks. Sealed Power Corporation, Dept. H-10, Muskegon, Michigan.



Week-End Railroad [Continued from page 165]

were laid on ballast of cinders or crushed limestone. The road now has more than half a mile of main line with equal trackage in sidings, industrial spurs and yards.

Most of the rolling stock has been built from scratch. Even the trucks for the freight cars were built at the shop of a machinist member, from WF&P patterns and castings.

Crowds Forced Passenger Service

The small fry around St. Louis soon heard about the road. Nowadays 200 to 300 passengers are carried on a Sunday, Each one gets a printed ticket, properly punched by the conductor, and everybody obeys the rules. No tickets are sold, but a contribution box is handy for those who wish to pay. Rigid safety rules prevent accidents.

Bug-eyed youngsters bitten by railroad zeal beg to be taken on as crew members, and those who qualify are given the high privilege of working up to trainmen and conductors. The WF&P weeds out the true railroaders through the simple process of putting the beginners at track work.

Over the years the emigration of members has built up a class of alumni scattered about the country, so that the WF&P now has "general agents" stationed at San Luis Obispo, Calif., Amory, Miss., Evanston, Ill., Baton Rouge, La., Green Bay, Wis., and Mexico City. Some of the alumni commute to St. Louis several times a year to keep their hands in. Currently the most remote member is an airman in Korea.

The president, Joseph L. Christen, is an official of the Pullman Co. at Chicago. Others active in the management include two research chemists, a machinist, two engineers, an embroidery manufacturer, a travel agent and a college instructor.

The WF&P intends to go right on expanding and meeting all schedules every Sunday. All it asks of the public is that nobody refer to it as cute.

Milk Express

When the 4:15 local from Squeedunk suddenly stopped in the middle of its run, the conductor reassured the passengers: "Just a cow on the tracks.

A few miles farther on, the train squealed to a halt again. Explained the harassed conductor, "We caught up with that cow again,"





smoothing seams and ioints



refinishing furniture

removing old paint



KING-SIZE BOTTOM PLATE

KING-SIZE BOTTOM PLATE extends beyond body of tool for sonding in very close quarters.



MODERN SWITCH HANDLE is located close to housing for better control, less operator fotigue.



AUXILIARY KNOB HANDLE gives choice of three positions for ease in sanding close to obstructions.



UNIQUE PAPER HOLDER stays open when attaching or detaching paper, frees both honds for job.

NE VV
Black & Decker
Utility
No. 44 SANDER
only \$46.95



"Take it from a guy who cut his eyeteeth on tools, this new B&D Utility No. 44 Sander is a top buy! It's smooth-running, gives a finish like satin and it's priced below tools of comparable quality! Just attach a 3%" x 9" sheet of abrasive paper; plug it in any electric outlet (A.C. or D.C.); and you're ready for the finest finish sanding—no final hand sanding needed! When you want a real tool, not a mere toy," pick the brand the experts choose. BLACK & DECKER!"



- "Satin-Smooth" Finish, every time, in any direction, because tool produces small 3/16" orbit 4250 times per minute!
- Ten Times Faster than hand sanding on wood, metal, plastics, compositions!
- Light Weight, only 5% lbs., easy to use . . . helps even beginner do professional jobs!

Black & Decker_ UTILITY FLECTRIC TOOLS



WRITE FOR FREE BOOK! Packed with helpful, money-

Send to: Home Service Dept. H10S, The Black & Decker Mfg. Co., Towson 4, Md.

Name.

Address

City & State.



Starting a home workshop-for hobby-crafting, household fix-ups, or developing your skill as a professional mechanic? Here are three basic files you really need. Smart move for a good initial assortment of file types and cuts!

- 1. MILL FILE For smooth-finishing metal and tool sharpening. Popular lengths, 8" and 10",
- 2. SLIM TAPER Slender triangular file for saw sharpening and general filing in corners of 60° angle and wider. Popular lengths, 6" and 7".
- 3. FOUR-IN-HAND File-Rasp Four different cutting surfaces! One side flat, other side half round. Half of each side file cut, other half rasp cut. For flat or curved surfaces of wood, brass, lead, etc. Popular length, 8".

Don't consider anything less than Nicholson or Black Diamond brand-the world's finest file quality. At good hardware stores.

FREE 48-page illustrated book, "File Filosophy," on kinds, use and care of files. Write for it.



NICHOLSON FILE
18 Acers Street, Previdence 1, R. I.
(In Canada, Port Hope, Ont.)



NICHOLSON FILES FOR EVERY PURPOSE

How to Choose Your Trees [Continued from page 170]

whole idea of growing fruit trees at home. Among flowering trees, the experts' favorite is the Crab Apple, with nine varieties suggested. Says a middle-western horticulturist: "There is practically an unlimited selection of flowers, fruits and leaves."

Chief rival of the Crabs among flowering trees is dogwood, a popular favorite since George Washington's time. Some experts consider it the best native ornamental tree in the northern United States. Not only does dogwood have beautiful flowers. but also handsome summer leaves, berries and red foliage in the fall. "Fit for a palace or a rural setting" is the way one New England horticulturist describes it.

In the South the traditional evergreen Southern Magnolia is highly thought of not only for its flowers, but also for shade, screening, windbreak and its general appearance on the grounds. It's even recommended for planting along the seashore.

Pecans Lead the Nut Parade

Pecans lead all the nut trees by a big margin. The fastest growing of the hickories, the pecan not only has thin-shelled nuts, but makes a fine shade tree where it's hardy. Its only rival among the nut trees is the giant Black Walnut-the tree Grandma's commode was made out of-but the Black Walnut is pretty big to have near a house. And it has to be kept away from other trees since its roots give off a poisonous substance that kills many other kinds of plants if they get too close.

A favorite shade tree with nurserymenand one that looks like a comer-is the Sweet Gum. It has fine fall color. A comparatively new tree for home use is the Thornless Honey Locust, being actively pushed as a replacement for the disease-ridden elm. This tree not only stands up well under city conditions, but grass flourishes under it. The shade that it casts is just dense enough to keep the hot summer sun from burning the sod.

The experts scattered their shots widely in suggesting trees to avoid, but some names showed up repeatedly. Most of them are fast-growing trees that lack the strength of their slower fellows, and are weak-branched. or easily uprooted, or short-lived, or susceptible to blights and insects.

The poplars lead the unpopularity con-[Continued on page 252]

There is a difference in sealed-beam headlamps



...and $\underline{\text{this}}$ is it \longrightarrow

All-Glass sealed-beam headlamps do not grow dim



when you slow on your glasses, moisture condenses on the lens. When moist air gets inside some types of sealed-beam headlamps, the same thing happens. It condenses on lens and reflector. And as the water deteriorates the reflector, the lamp grows dimmer.

Moisture can't get into General Electric sealedbeam headlamps because they're All-Glass and all one big bulb. Tests show they average 99% as much light after years of use as when new. To drive and enjoy it knowing you can see safely—get General Electric All-Glass headlamps.

You can put your confidence in-



How to Choose Your Trees

[Continued from page 250]

test for these reasons, even though nurserymen sometimes recommend them for screens and windbreaks because of their quick growth-as much as 21 feet in two years.

But the poplars have some friends on the Great Plains, where they are among the few trees that will endure drought and wind. Another is the Box Elder, which is also avoided by horticulturists in other sections because of its weak structure and poor appearance. It also brings a host of brightly colored little bugs that swarm up the nearest house to lay their eggs inside.

Trees for the City

Some trees are useful only where conditions are so bad that other trees do not survive. The Catalpa will grow in the heart of cities, for example, but it's a weed tree elsewhere. So is the rugged Tree of Heaven, which spreads at the drop of a seed pod, but has vile-smelling flowers. The Ginkgo, most nearly disease-resistant of all our common trees, and able to endure city conditions, is unpopular with some because its fruit has an unpleasant smell when crushed.

The seashore, with sandy soil and flying spray, presents its own problems. Live Oaks are the favorite in the South. Willows and birches are often mentioned elsewhere. The common kinds of pine, like the Jack Pine, are also suitable for seashore planting.

The experts all emphasize that it's pretty hard to pick the best single tree for any use. Even when you narrow down to trees suited to your own property with its special climate and soil, you'll still have a choice to make-and your answer will depend on your personal likes and dislikes.

So use the chart as a general guide to start you finding the tree you want among the 3,000 available. But when you come to your final choices, consult people who are familiar with your neighborhood .-Hartley E. Howe.

Lucky Guy

Wife: "I've made my husband a millionaire." Friend: "What was he before you married him?" Wife: "A multimillionaire."

> At gas stations, garages, Kaiser-Frazer, Ford and other car

dealers or use this

coupon for introductory offer.

SAVE YOUR CAR—IT MAY HAVE TO LAST A LONG Mechanics agree that most enoil. Miracle Power contains colgine wear occurs because oil loidal synthetic graphite in susdrains into the crankcase during pension. This graphite clings to stops. This gives acids a chance metal . . . holds oil . . . lubricates parts even if oil is absent . . to attack unprotected metal and is the cause of DRY STARTprotects them against DRY PUTS THE "PURR.R.R. ING which wears out engines STARTING and acid etching. And you save gas and oil because . . . leads to costly repairs. IN ENGINE PERFORMANCE better lubricated parts waste To prevent "Engine Ulcers," use Miracle Power in gas and less power. Try Miracle Power next time you get gas. Miracle Power Division THE AP PARTS CORPORATION THE AP PARTS CORPORATION 860 AP Building, Toledo I, Ohio 860 AP BUILDING, Toledo I, Ohio ____ for which please send me postpaid: Enclosed find \$_ _trial cans of Miracle Power at 75c each (1 for gas, 1 for oil) ☐ Please send me free literature on making my car last longer.

City. ©AP Parts Corp. 1952

Name.

Address

YOU CAN WIN A "SUGGESTION BOX" BONUS

"Company pays \$1200 for cost-cutting idea!"
"Employee wins \$350 for suggestion!" Ever wonder how you can cash in on your company's suggestion system? Check these Bostitch case histories. There may be an idea here for you—and your company.

BUSINESS: Cabinetmaker

SUGGESTION: Fasten bottoms and sides of small chests with Bostitch foot-powered stapling machine and %" staples.

RESULTS: Five times faster than old method of nailing. Stapling more secure. Workers like it better.

BUSINESS: Gasoline Pump Manufacturer

SUGGESTION: Instead of solder, use %" staples to fasten No. 8 mesh on foot valve bottom of pump.

RESULTS: Production jumped from 20 an hour by soldering to 90 an hour with Bostitch. BUSINESS: Tile Contractor

SUGGESTION: Instead of nalling metal lath to wood studs and joists, use Bostitch hammers and tackers.

RESULTS: One man can now lath 4 bathrooms in 2½ hours compared to 5 hours the old way.

BUSINESS: Garage Door Manufacturer

SUGGESTION: Metal stitch aluminum panels together with Bostitch wire stitcher. Old method: drill and screw.

RESULTS: Plant turns out 500 doors a day as against 50 before. Stitcher and special table jigs for positioning panels save space, material.

BUSINESS: Vacuum Cleaner Manufacturer

SUGGESTION: To fasten metal discs inside fiber cylinders, use Bostitch metal stitcher instead of punching holes and riveting.

RESULTS: Manufacturer saved \$6250 the first year.

BUSINESS: Frozen Food Locker

SUGGESTION: Replace cellophane tape with Bostitch desktype stapler for fastening ends of frozen food packages.

RESULTS: Labor and material costs cut 50%. Bostitch method gives tight, permanent seal. Unlike tape, will not loosen at low temperatures.

TO HELP YOU find ways to apply Bostitch savings to your business, send for the 16-page illustrated booklet, "Time and Money-Saving Case Histories." It's free—and full of cost-cutting ideas!



| | a free copy of the Bostitch book of |
|---------|-------------------------------------|
| Name | |
| Address | |
| City | State |
| Company | Position |

POSTITCH 520 Machania Street Westerly P I

Starrett FRICTION THIMBLE* MICROMETERS



*An improved friction stop mechanism built right into the thimble permits easy, one-hand operation — insures uniform contact pressure for every measurement. You get the same sure accuracy every time ... plus 12 other big Starrett features including Satin Chrome Finish, Tapered Frame, Hardened Threads ground from the solid and stabilized and Hi-Micro Mirror-Lapped Finish on contact faces. See it at your Starrett Tool Distributor's.

SEND FOR IT — ONLY 10¢ Starrett "Tools and Rules" Book shows the right tools for any measuring job. 50 pages, 100 pictures, helpful reference tables, Address Dept. PS



THE L.S. STARRETT COMPANY ATHOL, MASS., U.S.A.



MECHANICS' HAND MEASURING TOOLS AND PRECISION INSTRUMENTS

DIAL INDICATORS • STEEL TAPES • PRECISION GROUND FLAT STOCK

HACKSAWS, BAND SAWS and BAND KNIVES

Crane That Saves \$2,000 a Minute

For a minute he looked right through me. "I've only seen it happen once," he said at last, "and that was a long time ago. We had a good crane engineer—all of them are. Generally they can sense the strain of a load, but that time there was no warning. The strands let go so fast he had only one chance. That was to flop on his face and wait for the cable to stop lashing around the cab. The wrecker was a shambles when the drum finally stopped spinning. But by some miracle he was never even touched.

"No, we don't worry too much about the cables. But there is always the chance of a load shifting, or coming free sooner than you expect. That's why we seldom depend on those ice-tong-like clamps you see hanging from the ends of the car. We may anchor them to the rails to lift the light stuff, but when we have a tough assignment, we count 100 percent on the outriggers.

Wrecking Crew Skilled Unit

By now I was beginning to suspect that the judgment of a wrecking boss was worth as much as the half-million dollars spent on the machine. Tracy modestly denied it, but paid high tribute to his crew.

"I've got 12 men," he said. "Crane operators, cutting-torch experts and skilled car repairmen. They can put a railroad back in business faster than all the financial wizards on Wall Street. Some of them don't look like much when you see them working around the rip track or the Diesel engine house, which is where they draw their regular pay. But when the car-shop whistle gives with its four long blasts-that's our signal to go into action-they come running like a bunch of minutemen. Or two-thousand-dollar minutemen, you might say. They never beef when you ask them to do the impossible. All they ask for, in return, is good food when they are out on the road, and decent bunks when they can grab a bit of shut-eye. And, when they're not on duty -well, I never knew a crane operator yet whose hobby, believe it or not, wasn't fishing!" END

Things Are Tough All Over

Mr. Gotrocks: "I feel like a million dollars today."

Mrs. Gotrocks: "Why so depressed, dear?"

THE MOST CHA

Versatile TOOL
ON YOUR BENCH!
CHANNELLOCK PLIERS

Made only by CHAMPION DEARMENT

In almost any job you can think of—Pliers are necessary—and Channellock pliers are the best you can buy. Whether you are working on your car, electrical repairs, plumbing work or just tightening nuts and bolts Channellock pliers do it better.

And remember, Only Champion DeArment makes Channellock-

More than 3/4 of a Century of experience in producing highest quality tools. Send for Catalog 14.—today.

CHAMPION DEARMENT TOOL CO.

Channellock pliers are listed in the Yellow Pages of most Telephone Directories



ONLY Champion DeArment makes

CHAN

NEL

LOCK

Annual Contraction



BETTER LIVING

. . . at new low cost!

Join thousands of happy, worry-free and rent-free New Moon owners. Move to top paying jobs, enjoy travel and vacation fun — a home completely furnished and ready to live-in, including kitchen, both and automatic heating system. Own a New Moon on our rent-like payment plan and enjoy all the comfort and advantages of genuine home ownership at once.

Free! Write today for literature describing the complete line of New Moon apartment homes.

REDMAN TRAILER CO.
38 BRIDGE ST., ALMA, MICH.

send for FREE CATALOG



America's Foremost money-making MECHANICS'

It's eary to own the ame "payod" to okn the and chorsed by America's top-dearning mechanics throughout the automotive, aviation to be a considered by the automotive, aviation tools help you handle every repair job laster, easier, better, And they LAST... payor for the automotive and over the automotive and over the automotive and the automotive and the samp time. Genuine Snap-on units—add others any time. Genuine Snap-on easy time, commended the samp time. Genuine Snap-on direct to users only, Mail coupon for free catalog.

Snap-on Tools

SNAP-ON TOOLS CORPORATION
8060-J 28th Ave., Kenosha, Wisconsin
Send me free catalog of Snap-on tools.

| Name | | |
|---------|------|-------|
| Address | | |
| City | Zone | State |

OCTOBER 1952 255

How Karsh Pictures Celebrities [Continued from page 225]

include his hands, gnarled by arthritis, in his portrait.

"But they are part of your character, part of your greatness," urged Karsh. "Generations of theatergoers have delighted in the expressiveness of those hands. Let me try."

With his lights, Karsh put the hands in shadow. Even the actor conceded that the picture was a triumph.

He works for 10 minutes at a stretch, then gives his subject a rest. A sitting may require an hour. It may take all day. He refuses to commit himself to more than two sittings a day, and he prefers to work before noon. A subject scheduled for an afternoon sitting may have had a cocktail at lunch.

"It shows in the eyes," says Karsh.

He Does His Own Developing

Karsh appointments are hard to come by and, once obtained, are seldom broken. Jeannette McDonald did fail to keep a Karsh date in Hollywood—and hurriedly dispatched flowers to Madame Karsh in expiation of her sin.

Off the studio is the darkroom. Karsh does

all his own developing. He develops by inspection—alternately dipping his film in the developer and holding it up to his safelight to mark his progress. He dislikes color film because developing it is purely mechanical.


When Karsh has done an outstanding picture, it becomes, in shop parlance, "The Churchill" or "The Sibelius" or "The Eisenhower." Such negatives are kept in a vault at a branch of the Bank of Nova Scotia.

In a little more than 10 years Karsh has photographed most of the famous men of the Western world. King George VI sat for him. So have Queen Elizabeth and her consort. All those pictures of the royal pair released for publication when they visited Canada and the United States last year as the Princess and the Duke of Edinburgh were by Karsh. Harry Truman, Bernard Baruch and even Vyacheslav Molotov have been Karsh subjects. Karsh has tried several times to make an appointment with Stalin.

"I once got as high as three commissars just under Stalin," he reports hopefully.

Karsh has even been reproduced on

[Continued on page 258]

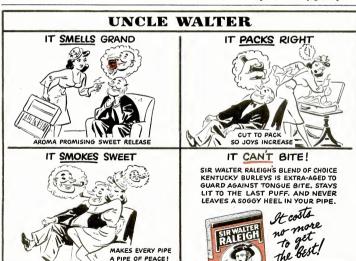



INSTANT PAINT BRUSH CLEANER

- · Quickly cleans fresh paint from a paint brush or roller.
- You can paint instantly with another color-or store brush dry-it will stav soft.
- Economical -- can be used again and again.
- Safe for all brushes and rollers.

Pint 59' Quart 98' G. N. COUGHLAN CO.

Wherever Paint is Sold

CHOOSE FROM PROFESSIONAL QUALITY

WESTERN AUTO

Electric

NO OTHER DOES





At Last — a rip, scrall, band, jig, crosscut, caping, and keyhole saw — all in one. Quick, easy, ideal for curves and fanciest shapes. Cuts inside holes without drilling starting hole. Users say there's nothing to equal it on wood, sheet metal, bone, plastics, hard rubber, cement sheets, pressed wood, etc. For factory, home workshop, carpenters, decorators, etc.

Sold & Serviced in Principal Cities Throughout U.S.A.

FREE Illustrated Literature. Write for Yours Today.

VICTOR J. KRIEG, Inc. Sole U.S. Representative

for Scintilla, Ltd. Switzerland 51 West 52nd St., New York 19, N. Y.

New Tools from Millers Falls

Most Versatile Power Tool You Can Buy

Sand, palish, drill, grind, wax, Sand, pallsh, drill, grind, wax, wire brush, mix paints — yau can da them all with this pawerful new 6-inch Millers Falls Na. 966. And it's the anly retary sander-polisher that can be equipped with an arbital attachment for fine finishing.



A Rugged Husky for Tough Cutting

Razor sharp — with large, palm - fitting handle that lets you really bear down, this new No. 333 Utility Knife belongs in every toal kit. Unexcelled for heavy cutting in wead, linaleum, leather, cardbaard, etc. Camplete with 3 blades.



Biggest Saw Value on the Market

Big enough to cut finished 2x4's at 45° mitre, yet weighing only 11 lbx, whis new 7-inch Millers Folls No. 700 pocks a full ½ h.p. wallap. It's sturdily built, campact, safe to use Easy to handle and cantal—with all the capacity you need for practically any sawing job.

See these great new Millers Falls tools at your hardware dealer's saan. They'll save you time and work on countless jobs — and they're priced to give you top value far your dallar in every way.

Millers Falls Company, Greenfield, Mass.

MILLERS FALLS 001

The Mark of Superiorit

OCTOBER 1952 757



A heater cannot warm your car comfortably when a dirty, damaged or over-age thermostat prevents the engine from warming up properly. A faulty thermostat can also cause the engine to over-heat and boil away anti-freeze, wasting gas and oil.

Remedy this wasteful condition by getting your service man to check the motor thermostat. And if a new one is needed —

Replace with
AutoStat
motor
thermostat
by Fulton Sylphon

For faster starts and faster warm-ups, more miles per gallon, more comfort per mile. Save oil and reduce maintenance costs. Types to fit every make and model.

In hame, industry, and transpartation EVERYTHING'S UNDER CONTROL



FULTON SYLPHON DIVISION KNOXVILLE, TENN. BRIDGEPORT THERMOSTAT DIVISION BRIDGEPORT, CONN.

How Karsh Pictures Celebrities [Continued from page 256]

stamps. It was a Mackenzie King Karsh that appeared on a Canadian stamp and a Harlan Stone Karsh on a U.S. stamp.

"I have an insatiable appetite for giants," he has said.

What distinguishes a Karsh from other photographs is something that perhaps Karsh himself could not explain adequately. Critics mention only bits and pieces of his art. One said Karsh has an instinct for composition, but that doesn't adequately describe Karsh.

The Equipment He Uses

He uses the customary equipment—spotlists and floodlights, one 4" by 5" and one 8" by 10" view camera with Ektar lenses of different focal lengths, plus two reflex cameras, one loaded with color and one with black-and-white. Occasionally he uses a 35millimeter camera when he wants to take pictures "discreetly." The reflex cameras are mostly for outdoor work such as the multiple portrait of a city—Vancouver, B. C.—on which he has recently worked.

For indoor portraits he uses a diaphragm opening of f/11 or f/16 and a shutter speed of about a tenth of a second. His film is

Super XX.


For portraits of the face, Karsh is addicted to dark monochrome backgrounds. Now and then he will use a prop. An upthrusting of pencils appears unobtrusively in the lower-right-hand corner of a portrait of Henry Luce. He photographed Admiral William Leahy against a map, Charles Evans Hughes against a leaded glass window and Madame Chiang Kai-shek against an ornate Chinese screen.

That's as much as anyone knows about the Karsh technique. Now and then a little light is thrown on the gentle mystery of his thinking. In a telephone conversation he will remark: "I need some radar atmosphere. This man is a modest person, and I need to show his real stature."

Industrial Pictures, Too

Lately Karsh has branched out into industrial photography. He doesn't want to be typed as a portraitist. But, inevitably, because he is fascinated by the human countenance, his pictures of factory interiors have workmen's faces in the foreground. They are fine faces, reflecting the dignity of human counterproperty.

[Continued on page 260]

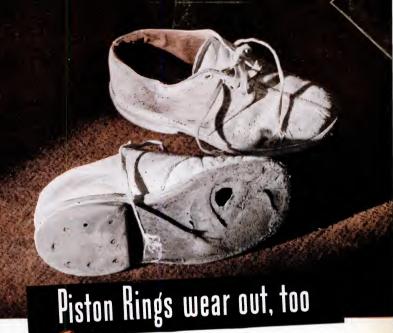

TOUGH .. but oh so gentle !

TOUGH on oil-pumping
GENTLE on cylinder walls

And there's just one thing to do about worn-out piston rings—replace them! Fortunately, piston rings warn you when they begin to wear. You start using too much oil. Your engine begins losing power. The more you delay the more you'll pay.

Naturally you want the rings that are tough on oilpumping, gentle on cylinder walls. You want the rings that will stretch out your engine's life. You want Hastings Piston Rings—the rings that are engineered exclusively for replacement service. They stop oil-pumping, check cylinder wear, restore engine performance—for a long, long time—and at surprisingly moderate cost. It's the best money you can spend on your car.

Play safe. Avoid a major overhaul later on. Go to your motor specialist and ask him for a piston ring check-up now.

HASTINGS MANUFACTURING CO., HASTINGS MICHIGAN; HASTINGS ITD, TORONTO

Makers of Piston Rings. Soark Pluss. Oil Fillers. Casile. Drout

HASTINGS

MOTOR-ENGINEERED PISTON RINGS

Featuring Chrome for Heavy-Duty Service
IN PACKAGED SETS FOR CARS, TRUCKS, BUSES AND TRACTORS



can be yours with this ⊢ LOW COST 250 amp. (full size)

Electric Drive

Complete Text and

Lessons Book, Cov-

ers all welding wark. 544 pages, over 600

illus.\$3.00

Lessons Book, Cam-

plete operator's

training course, 200

Practical Design.

Hundreds of welding

ideas in design form.

3 vals, 100 designs

Single vol....\$3.50

each.

\$1.00


pages, fully illus.

ARC WELDER HOBART ARC WELDERS

Be independent! Set up your own welding shop and start earning Welder, that is easy to use—a welder that will let you go out ofter the big pay jabs for formers, contractors, factaries, builders, etc.

are *Simplified*

Habort Welders are rugged, dependable, ecanamical — let you handle all types of work - ossure low cost, high quality welds. That's why they're used in America's leading production plants. Habart Welders give you 1000 cambinotions of welding heat-let you make fine welding adjustments right at your wark, without returning to machine. Auxiliary pawer autlet lets you aperate lights, tools, etc. Available in gas and electric models, portable and stationary. Check coupon for complete details.



Earn big maney daing all kinds of welding wark. Leorn quickly, easily, at law cast in modern non-prafit Habort Trade Schaal, Complete ar portiol caurses. Best equipment, thoraugh training, experienced instructors.

Check coupon and MAIL TODAY!

Set of 3.....\$10 HOBART BROTHERS CO., Box P-102, Troy, Ohio "One of the world's largest builders of arc welders"

| ☐ Electric Dri Welders Send baaks ch Practical Desig ☐ Val. | an: ☐ Vol. 1 ☐ Val. 3 ☐ Set of 3 Vols. | booklet 2 |
|---|---|-------------|
| Lessons Bo | ak Cash encl. C.O. | D. Welding" |
| ADDRESS | | |
| CITY | STATE | |

How Karsh Pictures Celebrities [Continued from page 258]

man labor. The pictures have a heroic. mural-like quality.

The Karshes are not wealthy. They chose not to be. Early in their marriage they sat down and posed themselves the question: Shall it be fame or fortune?

"By fame," Karsh explains, "we meant recognition for my work."

For several years, inflation notwithstanding, he has charged \$350 for a portrait sitting, plus \$25 for a master print. Subsequent prints cost \$10 and up, depending on the work involved. Trips out of town are on a basis of the fee plus expenses. New York is not considered out of town.

Karsh could ask far more money, and get it. He won't bother. He and his wife have enough money to do with. That's all they want. In return, they have an independence that a straitiacket schedule, keved to amassing money, could never give them.

He Just Says No

When Karsh wants to refuse a sitting, he simply says no. That's the end of it.

A lot of his earnings are dissipated in expenses. He dropped \$20,000 on one safari to Europe, undertaken without assignment for the sheer pleasure of finding some more important faces to photograph. His prodigality, as befits the man, is not all for his own fun. Given a substantial honorarium for his appearance at Kent State College, he turned it back to establish a photographic scholarship.

Karsh has no regrets for the way Madame Karsh and he decided to arrange their lives together.

'So long as a man lives," says Karsh of Ottawa, "he can alibi his mistakes. When he is dead, only his work speaks for him." END

OOH! What You Said . . .

They have been having tests of atom bombs and such things in the patient state of Nevada, and the following story has come out of the area which is used to taking a chance.

There was an Indian on one hill and an Indian on another hill and they were chatting to one another by means of smoke signals.

Pop went an atomic bomb, sending up its varicolored cloud blast into the bright desert sky.


"Gad," one of the Indians exclaimed, "I wish I'd said that."-Hy Sheridan in Flying.

YOU CAN'T DO A BAD PAINT JOB

with New Gold Bond Velvet!



GOLD BOND VELVET is the easiest-going wall paint you ever used! Ready-to-use. No primer needed. Dries in minutes to a velvet smooth surface that won't crack, chip or peel.



FLOWS ON! Just dip your roller or brush in odor-free Gold Bond Velvet and see how it goes on almost by itself! It eliminates what professional painters call "drag," which is so tiring.



WITH ORDINARY PAINT you have to guard against lap or brush marks, touchup spots. No worry with Gold Bond Velvet! This latex-base paint blends perfectly...you can't do a bad job!



COVERS WALLS AND WOODWORK, TOO! Use Gold Bond Velvet over paint, plaster, wallboard and even over most wallpaper... without an undercoater.



EASY TO CLEAN UP! Brush or roller cleans off with plain water. Spatter or splash marks clean up with a damp cloth. No turpentine needed.




SCRUBABLE! Durable Velvet can be scrubbed year after year without harm. Pencil, crayon, finger marks and food smears wipe right offl

Ask your local Gold Bond paint dealer or lumber and building material dealer to show you the 12 new Velvet colors. The orange and tan label is your assurance of another top quality National Gypsum Company product.



NATIONAL GYPSUM COMPANY . BUFFALO 2, NEW YORK

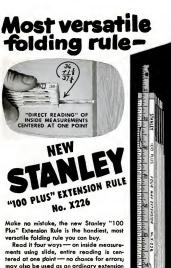

may also be used as an ordinary extension rule for inside measurements, and as a regular folding rule reading from either

Use it as a marking gauge for measure-ments in 2' and 4'

multiples.

CHECK THESE "100 PLUS" RULE FEATURES:

- Easy to read Big Black Numbers on White Sticks.
- Square ends butt flush with work.

 Opens to even inches at end
- of each stick.
- of each stick.

 Handy for end-to-end measurements opens in 6" multiples to full length, 72".

 8-inch Brass slide removable
- for use as depth gauge.

 New plastic finish wears four times longer.

 Extra Thick Rock Maple Sticks
- araduated all edges. Reg. U.S. Pat. Off. Hardware . Tools . Electric Tools . Steel Strapping . Steel TOY PATTERNS - 6 for 25c

For real rule value osk for the X226 at your hardware dealer's, \$2.65 each.

STANLEY TOOLS,

New Britain, Connecticut

THE TOOL BOX OF THE WORLD

1

| PI | Ideal g Two sets — | P2 | | | | |
|----|-----------------------|----------|------|--|--|--|
| | | PATTERNS | NOW! | | | |

(In Canada: Stanley Tool Co. of Canada, Ltd.,

| Troz didille y dis, noxidii rond, di | ococc, |
|--------------------------------------|-----------------------|
| Enclosed is | Send Patterns checked |
| Patterns P1 (25c) | Potterns P2 (25c) |
| Nome | |

Address

262 POPULAR SCIENCE

Will They Ever Climb Mt. Everest? [Continued from page 122]

built men. Lightweights. So frail do their bodies appear, that on some expeditions they have kidded each other about their lack of physique. But they are wiry, supple, able to balance themselves anywhere. Many are middle-aged: Shipton is 44. They acclimatize better than men of around 20.

Why do they climb? The most often quoted answer was from George Leigh-Mallory, an Englishman who was on the first three Everest expeditions, in 1921, 1922 and 1924. In 1924 he and Andrew (Sandy) Irvine set out to climb the last 2,000 feet to the summit. A man in their party watched, saw the two within 800 feet of the top, still climbing. Then a cap cloud hid the summit, like a curtain closing across the stage at the end of a play. Leigh-Mallory and Irvine never were seen again.

Why They Climb

Before this last attempt, Mallory had been asked, "Why do you want to climb Everest, anyway?" He answered slowly.

"Because it is there," he said.

Are there other reasons? Yes. For fame? No. Mountaineers do not become famous. Money? No fortune was ever made on a mountaintop, and the climbers lecture to pay expenses. The view? You may not get a view, because of snow blindness, or fog, or cloud, or because you are too exhausted to look. To build physique? Everest pulls you to pieces, and climbing her is neither sport nor exercise.

Shipton, like Mallory, answers the question-"Why?"-with the famous understatement of the English race. "We go to the mountains because we like it there.

All mountaineers agree, despite the fact survival looks impossible on the summit, that Everest one day will be climbed. Someone will lick all the problems-and conquer himself as he does. Maybe Lambert will do it this month, or Shipton next May. Whoever it is, he will have climbed the mile that marks the physical limits of the earth, the mile where nothing lives-no bug, no blade of grass. And, so far, no man.

Supersonic Sounds

A JET that flies at twice the swiftness of sound begins to approach the speed of rumor.-Buffalo Evening News.



GETAWAY TIMED BY ELECTRIC EYE. This Chrysler breaks light beams at start and finish of getaway test, while electronic machines measure time. Such quickly responsive engine power makes for sure, safe driving.

CHRYSLER CORPORATION'S

NEW DEEP-BREATHING ENGINES GIVE YOU MORE POWER FROM FUEL

Athletes take deeper breaths to get top performance. Chrysler Corporation's new car engines do the same thing. They breathe deeper to give you more power and brilliant response.

These compact, low-friction engines inhale and utilize air and fuel more efficiently because of dome-shaped combustion chambers...larger valves that open wider . . . straighter channels for the fuel mixture to flow through . . . spark plugs that fire directly above the pistons.

It is an exciting experience to drive the new Chrysler FirePower and DeSoto FireDome cars —or any car that Chrysler Corporation builds. All have high-compression power plants.

CHRYSLER CORPORATION engineers and builds plymouth, dodge, de soto, chrysler cars & dodge trucks

Chryster Marine & Industrial Engines • Oilite Powdered Metal Products • Mepar Parts & Accessories
Airtemp Heating, Air Conditioning, Refrigeration • Cycleweld Cement Products



HEART of new De Soto engine. Arrow No. 1 points to dome-shaped combustion chamber. This design permits bigger, high-lift valves (shown by No. 2). No. 3 is wide channel for fuel passage. Note absence of sharp bends that could slow down "breathing."



FROM PLANES INTO CARS. Once only some airplanes and expensive, "custom-built" car engines had dome-shaped combustion chambers. Then Chrysler engineers worked out methods that made it possible for the first time in quantity production.

"This modern furniture worth \$490 cost only \$187*



Everyone asks where we bought our beautiful new living room furniture. Buy it nothing! I built it in spare time, with my SKIL Home Shop Saw doing the work. And there's no trick to it if you just follow the simple directions-what to do, and how to do it—in SKIL Chart No. 110.

You'd be surprised how much fun it is, how easy it is to miter and rip up to 2-inch lumber with a SKIL Home Shop Saw. All adjustments are so simple and quick that even amateurs do professional-looking work! And there's no end of ways your SKIL Home Shop Saw will pay for itself in building an extra room, a garage, and doing odd jobs around the house. Why don't you begin with this swell modern furniture? Send coupon and 10¢ for plans!



SKIL Deluxe Home Shop Saw—Model 586—\$59.50, 6" sow, SKIL Saw table and accessaries easily convert this saw to tilting orbor bench saw, sander and

only by SKIL Corporation, 5033 Elston Avenue, Chicago 30, III.

| SKIL Corporation, 5033 Elston Ave., | |
|--|--|
| l enclase 10¢. Please ta build the abave mo | send SKIL-Chart No. 110 showing how adern furniture. |
| | |
| Name | |
| Name | |

Buick Sets New Style for 1953 [Continued from page 104]

bined the foreign sports-car look with the comfort they are used to in their own production models.

With this in mind, he sat down one day in the late spring of 1951 to do what most American automobile designers do when they buy a new model-figure out how it can be altered to look different from everybody else's. Ned had just acquired a Buick Roadmaster convertible. He picked up a pencil and began to sketch a Roadmaster that, with minor changes in contour, took on a continental appearance. The changes had to be minor because he was going to have to pay for them himself when he had them made in a body shop, and he wasn't feeling flush.

Makes Hit With Brass

The next day, Ivan L. Wiles, the Phi-Beta Kappa who is general manager of Buick, dropped in. He spotted the sketches and walked over to stare at them.

"Say," he exclaimed, "I want one of these cars!'

Nickles, a bit chagrined at having somebody else pick up and start carrying the ball he had in play, nevertheless was gratified at high-brass approval of his ideas. He was even more pleased when Wiles had a car built to the specifications of the sketches he had drawn.

This was the pilot-model Skylark that I drove.

Fewer Die Changes Necessary

Wiles decided to announce the Skylark to the press, and probably to produce it in very limited quantities as a premium car in 1953. Fewer die changes will be required than are usual in building a new model, because of the lucky circumstance that Ned Nickles tailored the design changes to fit his own pocketbook.

I am completely confident that the demand for this beautiful new car will far exceed expectations. I'm also sure that it will set off fireworks in every design studio in the industry.

Choose Your Weapons

"You could have knocked me over with a feather," said the pedestrian, getting up from in front of the truck, "and I wish you had."-Clues.

SET 30 selected H. S. Straight Shank Drills from 1/4" lengths up to \$2.98 FILE MIX draulic Hose!! 7 different pcs., High Speed 1/4" \$4.49 SET 12 different size 75 H. S. Straight 5hank Drills, 1/4" to 1/2", lengths up \$3.98 SET 14 different pcs. 22F as above, \$8.79 MILLS HIGH SPEED DRILLS 44" TO 17.2" WITH 14" HANNS! SET 6 different size H. 5. ST Prills, 16 to 17.22" shanks, Prot. 45 52.98 SET 10 of above \$4.95 SET 10 of above \$4.95 MCM of the size SET 4 right hand H. S., shank End Mills up to 3 a" dia. \$3.98 LARGE SAW BLAD These large semi-light rose large NEW VICKERS MP9, 6 H. P. Hydraulic Motor on the compact, page on the compact, page of the compact of the compac HIGH SPEED DRILLS 1/2" to 1-3/16" WITH 1/2" SHANKS! 5 Drills for less than the price of one ne SET S different size H. S. Drills \$7.95 SET 10 different size H. S. HIGH SPEED STRAIGHT SHANK SET 10 different size H. S. 33f Drills ½" to 1.3/16". \$14.50 These new and used H. S. precision Drills with ½" shanks can be used in a ½" electrill or a ½" capacity lathe or drill press. CHUCKING REAMERS CHUCKING REAMERS SET 20 Different Size Migh 16F Speed Straight Shank 16F Speed Straight Speed S HIGH SPEED MORSE TAPER SHANK DRILLS 15 Different Size High Speed Morse Taper Shank Drills up to 9/16" with No. 1 and 2 tapers, New and used, \$50 value, Priced at only.....\$6.49 See John See NEW MASTER HYDRAULIC CONTROL For controlling two single or double cylinders separately or simultaneously is close center type. 1500 PSI rating, only... HIGH SPEED HAND TAPS \$9.98 GEAR TYPE PUMP Rated at 3 GPM, 3750 RPM, 1500 PSI, ½" drive spline. Gov't cost over \$500. Yours sy.49 spline. Go P1 CENERATOR 200-amp. 24-volt, continuous duty, 25-volt, 25-vol SET 8 Different Size High Speed Morse 37F Taper Shank Drills from 1" to 2" with No. 3, 4, and 5 tapers. New and used. \$125 value. Priced \$29.95 SLITTING SAWS WITH MANDREL TAP HANDLE TAP HANDLE No. 6 (5/32" to 34 Cap. Only ... 52.75 Discounts or teamtity BARGAIN TOOL 8 SHOP MIXES—PPO 30 CRINDING WHEELS 14" arbor, 4" diameter max... 53.29 12 FILES up to 12" length, a buy 6 SILTING SAWS WITH MANDREL SET 8 DIFFERENT 34F Sheed SHIT14F Sawes 5 Seed 14F Sawes 5 Se 2 - 2 FILES up to 12 fending a but 2 - 2 - 2 FILES up to 12 fending a but 3 - 2 - 2 FILES up to 12 fending a but 3 - 2 - 2 FILES up to 12 fending a but 3 - 2 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 - 2 FILES up to 12 fending a but 3 fendi 1350 RPM fornze bust bearing. 5/16° shaft. Used, guzanteed serv-icedie, Wt. 4 52.49 Lee 1, 20-volt A.C., 62-volt. 3 amps. Just the think for your small 24-volt motors. \$1.95 NEW GEAR BOX TRAIN: 6 to 1 gear filex shaft flex shaft flex shaft flex shaft gears and 7 HIGH SPEED WOODRUFF KEY SEAT CUTTER BEARING MIX: About 40 needle, ball and roller bearings, new and used. Up to 21/2" dia. approx. 5 lbs. Outstanding buy at \$2.95 SET 5 different size cutters. Can be used as mounted milling that with by and a size of the size of th • RIVET MIX: 5 lbs, assorted rivets; cherry, explosive, etc. Hundreds of rivets \$2.29 NEW 360° SWIVEL TYPE TOOL HOLDER & BORING BAR Here is a tool that will do the work of a left, right and straight tool hotel to original to original course, and a straight tool hotel to original course, PPD to you. 1 700.4 takes a 37.48 rg, bit or 37.68 rg, 97.68 rg, 97.6 6/ MOUNTED STONES ratios possible. \$8.49 Many Wt. 10 SET Mixture of 27F 12 Mounted Stones with 1/4" AIR TANK-REGULATOR-MASK AIR TANK • A4 Tank, 8" x 8 104 cu. in, vol. 5 PSi ... \$1. • D2 Tank, 6 %: 24". 500 cu. vol. 500 PSf \$4. • Demand Type shanks. \$2.49 NEW BUFFING WHEELS Approx. \$/16" thickness, PDI dia...\$1.70 pcs. 8" dia...\$1.70 pcs. 8" dia...\$1.70 pcs. 9" dia...\$2.00 pcs. 10" dia...\$2.50 pcs. 12" dia...\$2.50 pcs qre quantity available t great savings. e Demand Type Regulator 500 PSI pressure gauge tanks Complete with 14" valve, Fits above regulator, Above equipment suitable compressors, respirators, di hose Outlet \$1.50 hose Outlet \$1.60 tanks,

Write For Free Catalog Describing Thousands of Bargain Cutting Tools.

T&T TOOL 221 W. SECOND TULSA, OKLA.

Money-Back Quarantee On RECEIPT of Merchandise, All mose, mixture of new and reconditioned unless specified new, All orders (Except those specified F.O.B. Tuiss) are shipped Post Pald, saving you up to 25%, on total delivered cost!





 Max. Depth of Cut
 2½"

 Table Ahead of Blade
 10½"

 Rip to Center of
 19" panel

 With one extension
 36½" panel
 Saving you time, money and improving work accuracy every time you rip

SPECIFICATIONS

or crosscut a board to size is just the beginning of this saw's usefulness. Cuts tapers

It handles easily and accurately such sawing operations as cutting angles, double angles, chamfers, bevels, tenons. And with low cost Atlas accessories it cuts all dadoes...handles a host of straight shaping and moulding operations.

Atlas is the saw for your shop. Its double-locking patented fence is the best you'll find on any saw. Blade tilts - your work stays flat - for safe accurate angle sawing. Has

sealed-for-life ball bearings. Precision-ground greviron table. Grill extensions, original with Atlas, for handling big stock. See these and many other features at your Atlas dealers, or send for catalog today.



NEW 20-PLAN BOOK ONLY 50¢

20 original, practical projects for your home and tions. Send check or cash (no stamps) \$.65 outside U.S.A.

ATLAS PRESS COMPANY 1025 N. PITCHER ST., KALAMAZOO, MICH.

'Space Men' Make College Men Think [Continued from page 127]

covering. . . The plant continually sends up new shoots which grow from the fibrous base and contribute to the density of the surface area. After a period of one year, the surface is so clotted with fiber that it becomes coarse and undesirable, and soon a mass dving takes place. The roots in an area of three or four square feet die simultaneously because of strangulation, leaving bare, unsightly spots upon the lawn, dotted with the large dead fibrous roots. . .

"The only solution is to pull out areas of the grass to allow for new growth. This must be done at randomly spaced intervals to insure a uniform root surface, and the amount pulled out must be very small. Because of the toughness of the roots in tension, pulling too large a clump will uprootoops, upstem-a large portion of the plant and the result is an open space to be planted again. The vertical force to be applied to the surface fiber to upstem it cannot exceed six pounds. . .

"When one heads home from work after a hard day at the office, he sees one Methanian after another plucking away at their lawns, most of them using their own wonderful cussing that they've developed. . ."

Students Build Models

With these stringent requirements, a student designed a fancy machine called the Cleen-Pull Lawn Conditioner that would pull up 40 tufts of root, put the tufts in a drawer, and smooth and ruffle the surface to make it more attractive. It is powered by a hydraulic system activated by a handpumped cylinder. Wherever possible, light metals are specified to make it light enough for the feeble Methanians to lift.

No report on sales is available.

Does this sort of thing actually help in creative thinking? Professor Arnold points out that the best students, as shown in their over-all college records, do the best with the Arcturus project. They are stimulated and interested by it, while less gifted students are often bewildered and tend to dismiss the whole idea as silly.

The Arcturus project is of course only a quarter of the whole seminar on project design. Another portion is devoted to the design of new tools and the improvement of existing ones. Students have designed such useful new machines as a sander that either

[Continued on page 268]



OCTOBER 1952 267









10" to 26" in depth-they can even take the place of a wall, save as much as 5 feet in total house length. Wide choice of woods-unfinished, or with prime coat, paint, stain or furniture finish. Inner walls and backs are insulating, sound-deadening, mildew-proof. Write for free fully illustrated literature. Dept., 64B-NOVA SALES CO., Trenton 3, N. J.

'Space Men' Make College Men Think [Continued from page 266]

oscillates or rotates, as desired, and a twospeed power hand drill.

This fall Arnold added a new workshop to his setup, so that his students can actually build their machines-or models or mockups-whether designed for 2951 or 1952.

Professor Arnold is convinced of the need for creative thinkers-and for what he calls product designers. Taking an existing product, the product designer first tries to make it more efficient and also more versatile. He simplifies the design so that it is cheaper to make. Finally he tries to improve its appearance and sales appeal. The same technique applies to new products.

Creativity, Professor Arnold believes, is not necessarily something you have to be born with. In fact his whole course is based on the idea that it can be taught. Partly, he believes, it's a matter of day-dreaming, or of speculative thinking. All too many scientists don't care to speculate; they leave that to the science-fiction writers.

Arcturus Designs Pay Off in Earth Money

Industry seems to agree with Arnold that it needs product designers. His students find a wide choice of jobs offered them on graduation; the demand is greater than the supply. One man last year got a \$7,800 job right after commencement-so Arcturus IV apparently pays off in good earth dollars.

Meanwhile the design of new products for the Methanian market goes ahead. Rapid transportation needs-automatic controls are called for because of the Methanians' slow reaction time-are still to be met. Something must be done about the burrowing animals that eat the Methanian crops. Methanian agriculture in general is still mostly hand work; all sorts of farm machinery are needed to raise the standard of living.

The industrial designers of Massachusetts Intergalactic Traders - MIT to you - have plenty to do. Whenever our space explorers really get going, they'll find the products ready for an export drive such as the Milky Way has never seen.

Watch Out

Brown: "How is the new stenographer you've got?"

Greene: "Fine, except she's a little clock-eved." -Baltimore & Ohio Magazine,

FOR EASIER SCRATCH-FREE SANDING USE DREMEL STRAIGHT-LINE ACTION SANDERS

FOR ALL HOUSEHOLD AND WORKSHOP SANDING

You'll find Dremel Electric Sanders indispensable around the house and workshop. Thousands of satisfaction of the sanding can produce professional-like, exacta-free surfaces. Both models sand with-the-grain, are durably built to give years of service. Avoid slow, tiresome hand sanding. See 'where to buy' instructions at the bottom of this page.

MODEL 2000

A high-speed, fast-cutting produc-tion sander for home and shop use. Its straight-line, with-the-grain action is ideal for redecorating jobs, furniture and cabinet making, boat building or re-finishing, etc. Recommended finishing, etc. Recommended by painters and carpenters for sanding woodwork, doors, stairways, dry waii Joints, etc. Weighing less than 5 lbs., it is perfect for difficult vertical and overlead sanding jobs. Has 21 sq. in, (3% x7") sanding pad sufface.

Price includes this sturdy Price includes this sturdy steel storage case (shown below) with handy carrying handle; 25 assorted abrasives; 1 \$24.50



MODEL "A"

The lighter capacity Model "A" Sander is an excel-"A" Sander is an excel-lent ali-purpose house-hold sander for home maintenance, furniture finishing, hobby projects, etc. Wonderfui wax polisher. Perfect for massage use. Weighs only 2½ lbs.; has 12 sq. ln. (2%" x 5%") sand-lng pad surface.

Price includes:

6 sandpapers. I sheepskin,

felt pad.

To produce flawless work of professional quality, all sanding must be done with the grain of the wood. Therefore when so-portant to remember that only Straight-line, with the grain action is suitable for finish sanding operations. For the flavest chalkes, insist on a Drement of the straight of the straight of the sand of the san

Note How Dremel With-The-Grain Action Eliminates Cross-Grain Scratches

FREE SANDING GUIDE

A handy "Haw-To-Do-It" booklet containing helpful hints on sanding and refinishing procedures is packed free with each Dreme! Sander, Extra copies available for \$25. BOTH MODELS FEATURE: Only 2 moving parts; easy one-hand operation; 10-second paper change; 14,000 strokes per minute; 110-120 V., 60 cycle, A.C.



















A "must" for sanding dry-wall joints. Fast-cuts refinishing time in holf.

Sonds right into tight corners.

Prepares furniture for repainting.

SHARPENS Electric



many

DREMEL MANUFACTURING CO.

FASTEST MOST POWERFUL TOOL FASTEST MOST POWERFUL TOOL IN ITS CLASS—APPROX. 27,000 R.P.M.
Most practical tool a man can own-more powerful than any similar tool you can buy. Works well in wood, plastics, and metal. For home maintenance jobs you'll wonder how you got along without it. For model making it's a must, and for general shop operations it saves time and money. Compare it, try it, buy it.

it saves time and money. Compare it, try it, buy it. You be the judge, tent Features: Olliess sealed bearing • Dynamically balanced armature • Shockproot, Bakeith chousing • Dust-filtered air cooling system • Sturdy 110-120 V., A.C.-D.C. motor • Wt, only 13 ... • A precision tool widely used in industry for

Dept. 122-K

vears RIT NO. 2, Includes Mod. MI. NO. 1, Includes Model

Multi-No. 2, Includes Mod. M. D. 1 Model of the Model of

SEE YOUR LOCAL DEALER. Dremei Tools are sold at better dealers everywhere. If your dealer can't sup-ply, order direct on a five day trial, money-back guarantee. Remit in full, and we will ship postpaid. Or, send only \$2.00 now, pay postman balance plus postage and C.O.D. fee. RACINE, WIS.

Pointers for Home Painters Floors:

Remove wax and polish by washing floor with turpentine. Wipe dry. Unless this is done, finish coats may not dry or stick properly.



Paint in areas about four feet square. Start in far corner and work toward door. For best results use wide nylon-bristled brush—one designed for the job.





On open-grained floors, brush wood filler into pores. Rub aeross grain with burlap to remove excess. Let dry. Sand lightly with grain. Clean with cloth moistened with turpentine.



To store brushes for long periods, clean thoroughly and wrap securely in manner shown here. Brushes stay in better condition when they're kept in good shape.


JOB AFTER JOB, you'll get best results with a well-tipped nylon paint brush. Durable Du Pont nylon bristles paint smoother... are clean and sanitary... never get brittle ... don't break off even under the roughest treatment. And nylon bristles last from 3 to 5 times longer than ordinary bristles. Leading manufacturers make nylon point brushes in all types and sizes. Look for the name NYLON on the handle. Be sure to pick the size brush designed for the job... and demand Du Pont nylon bristles.

150% Abbitversory



The best brushes have
DU PONT NYLON
BRISTLES

Lightning Goes Down and Around



A NEW high-voltage lightning arrester sends lightning down a "spiral staircase" to keep it from damaging equipment at power stations. Conductors angling between the three vertical columns carry the lightning groundward. The arrester was designed by A. M. Opsahl, Westinghouse engineer, shown above with a model. A full-size installation will stand 10 feet high, only half as tall as former high-voltage arresters, which required large structural-steel supports.

Motor Taps Sun for Power



This solar generator converts sunlight into enough electrical energy to spin a balsawood wheel on the shaft of a small motor. Light falling on photoelectric cells generates the current.

If sunlight is not available, heat from a burning candle or a 150-watt electric bulb can do the trick. The heat is converted into electrical energy by a bank of thermocouples. The "grownups' toy" was built by General Motors engineers to demonstrate solar power in their science shows.

NOW! YOU SAVE TO 50% on AUTO PARTS, ACCESSORIES

EVERYTHING you need for your car-50,000 items including thousands of HARD-TO-GET PARTS plus many unusual accessories offered for the FIRST TIME—all at wholesale prices!



Take advantage of this big opportunity to get everything you need for your car—even many hard-to-find parts and accessories you can't buy in stores! You can get them at wholesale prices—save up to 50%. You'll find these 50,000 thrilling bargains described and illustrated in a giant new wholesale catalogue, jam-packed with exciting values.

Biggest, Most Complete Line in All America for Cars, Trucks, Taxis ... from the oldest to latest models

In this amazing catalogue you'll find a big choice of automotive accessories and parts-everything you want. Also thrilling values in custom-styling accessories-high-speed parts and accessories to soup up stock engines for top speed, accelera-tion and economy. Catalogue also includes new style Hollywood accessories different from anything you've seen in stores. Other exciting buys at wholesale prices include:

- Auto radios
- Mufflers and pipes
- Custom-styling accessories
- Engines and parts
- High speed equipment
- Tires and tubes
- Tools
- Body parts Radiators
- Springs and shocks
- Ignition parts

New, used, rebuilt parts and accessories for all makes, years, models of all autos, trucks and taxis.

Exciting get-acquainted FREE GIFT OFFER

Amazing, valuable new scientific check chart that shows you with every catalogue. It explains how you can easily make your car safe. Offer limited, so rush coupon today.

| W. AUG | | |
|---------------|-------|--|
| J. C. Whitney | & Co. | |

jammed with 50,000 auto-motive items at wholesale prices. Value \$1.00. For lim-1917-PA Archer Ave., Chicago 16, III. ited time only, it can be yours for just 25c-which Please rush me your giant catalogue, \$1.00 value, that describes \$0,000 automotive fterns I can get at wholesale prices. I enclose 25e to cover part of cost—which I understand will be credited to me on my first \$5,00 order. Also send me FREE GIFT. yours for just 25c—which will be credited on your first \$5.00 order. It's like getting this valuable bargain packed catalogue FRI Send today for YOURS.

J. C. WHITNEY & CO. 1917-PA Archer Ave. . Chicago 16, III.

124 illustrated pages.



HANDLES LIKE PUTTY HARDENS INTO WOOD!

Fill Holes Around Pipes!

Handy Plastic Wood seals cavities to prevent dust, drafts, bugs, mice from coming through. Has dozens of uses all through the house.



RESET LOOSE SCREWS

Clean and fill old screw holes with Plastic Wood. Let dry and drive screws back into place. Plastic Wood holds firmly, lastingly. Won't crack or pull away. And it's so easy! Handles like putty... bardens into wood!

MEND BROKEN TOYS

Plastic Wood sticks firmly to most common surfaces...wood, metal, plastic, fabric, plaster and composition. Plastic Wood is a real toy saver!



Plastic Wood makes dozens of home repairs easy! Can be sawed, sanded, carved or drilled. Will not chip, crack or peel. You'll want Plastic Wood Solvent, too, for controlling the consistency of the Plastic Wood, and for clean-



Science Explains Why Minerals Glow When Heated

By LEARNING what makes some mineral crystals glow in the dark when heated, University of Wisconsin scientists have solved a long-standing mystery.

The strange phenomenon is known as thermo-luminescence. Unlike ordinary incandescence—the familiar glowing of any object when raised to red or white heat—thermo-luminescence takes place at a lower temperature and lasts only a moment or so. It is more common than is generally realized. Anyone may observe thermo-luminescence by grinding a small piece of limestone into powder, putting the powder in a frying pan, and heating the pan nearly red hot in the dark.

Radioactive Minerals Are Cause

What makes minerals thermo-luminescent, the scientists found, is radioactivity of uranium and thorium scattered throughout the earth's rocks. The radioactivity drives electrons into "traps" in the lattice-like structure of crystals. When the crystals are heated slightly, the electrons escape from the traps and emit light in the process. Because most minerals contain only an infinitesimal amount of uranium or thorium, centuries are required for the trapping of enough electrons to give a few seconds' glow.

No practical use of this phenomenon has been made up to now, but the Wisconsin group proposes one. During an atom-bomb blast, its report suggests, radioactivity would be so intense that crystals of lithium fluoride would trap sufficient electrons in a few seconds to glow when heated. If a person were wearing a "dog tag" of this material, the amount of radiation striking him would determine the intensity of the glow. The Wisconsin scientists have designed a thermoluminescent apparatus to heat the crystals and measure the amount of light emitted. Using such a device, authorities could quickly divide a population exposed to A-bomb radiation into groups requiring similar medical treatment.

Renewing Car Upholstery

MOHAIR upholstery in a car may eventually mat down. If so, place a damp cloth over the matted area and run a hot flatiron over the cloth. Then brush the nap upright.

How to clean CARBURETORS "on-the-engine"





is yours for the asking.





Get GUMOUT from your GUMOUTER favorite dealer today. Or use the coupon to order direct. A copy of the valuable Carburetor Handbook

A lot of time and money is wasted checking timing, adjusting spark plugs, replacing points—even making major replacements—in an effort to correct engine troubles curable only by carburetor cleaning.

Today, there is no excuse for neglecting this all-important job. With GUMOUT, you can clean the carburetor of all dirt, muck, moisture, gum, and varnish in less than twenty minutes. It's easy to do the job right on the engine.

Keep your engine tuned to perfection...get peak performance and save gasoline. Clean your carburetor at the first sign of engine trouble; with every tune-up; at least twice a year.

GUMOUT DIVISION, Pennsylvania Refining Co. 2686 Lisbon Road, Cleveland 4. Ohio

Please send: Pints of GUMOUT @ \$1,50 GUMOUTER @ 4.75

Carburetor Handbook free

Address City.

YOU CAN START A



FREE BOOK TELLS HOW You can start this REPEAT CASH business in your own home or ga-YOUR rage, while you are working at your regular job. Easy to operate, no experience needed. "Pays for itself from just 65 saw jobs."—Harvey Jensen.

For as little as \$15 down payment, you can get your BELSAW CIRCULAR SAW SHOP rushed to you.

You can make \$4 to \$5 an hour in your SPARE TIME sharpening and setting CIRCULAR SAWS for builders, lumber yards, factories... No Extra Equipment needed, no eanvassing. Send postcard today for your Free copy of "Life Time Security."

BELSAW MACHINERY CO 4405 Field Building Kansas City 11, Mo. like modern?

No special skill is needed to build modern furniture with Weldwood®

Plywood and Easi-Bild* patterns. Have fun, save money - build it yourself.

Use easy-to-work Weldwood Plywood in handsome cabinet wood that matches your present furniture. If you can nail, saw, and spread glue you can make this rich-looking coffee table, easily.

Send 35¢ in cash or money order for Pat. No. 309. Send 35¢ additional for catalog showing 180 Easi-Bild Patterns.

UNITED STATES PLYWOOD CORPORATION World's Largest Plywood Organization Pattern Dept., P. O. Box 215, Pleasantville, N. Y.

*Trade Mark, Easi-Bild Pattern Company

P-10-2



OWN YOUR BUSINESS

Start in Spare Time with a FOLEY SAW FILER

Here is a steady repeat CASH business you can start at hame in your basement or garcege, while you are working at your regular jab. Na experience is necessary to turn out perfect cutting saws—"the first saw I sharpened came out 100%. I think the Foley Saw Filer is a marvel of perfection," writes Clarence E. Parsons. Every saw you sharpen will bring you new custemers. You will find you can make up to \$3 ar \$4 an hour—\$20 to \$30 a week in your spare time as a starter. With a Foley Saw Filer you can file all hand saws, also band and cross-cut circular saws. It is easy to operate — simple adjustments — no eyestrain. Potented jainting principle evens up all irregular teeth and makes an ald saw cut just like new.

This Free Book

Shows How to Start

"MONEY MAKING FACTS"
shows you how to get plenty of saws to
file without canvassing, and how you
can develop into a general repair hop
that will be your own business. This is
a helpful, practical book that tells just
what to do—send for your free copy
today. No salesman will call.



Send for FREE BOOK

| FOLEY | MFG. | co., | 1019-2 | Foley | Bldg., |
|---------|---------|-------|---------|--------|--------|
| Minne | | | | | - |
| Send me | free bo | ok "M | ONEY MA | KING F | ACTS" |

| Name | | | | | | | | | | | | | | | | | |
|-----------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 4 d duona | | | | | | | | | | | | | | | | | |

STEEL AIR TANKS

Steel pressure tanks suitable for compressors, pneumatic units, gases, hydrauties, and liquids, Rated at 500 lbs. per square inch pressure. 14" standard pipe thread openings

On tank ends as shown.

Stainless Steel New 77/2 78/3 1/9 104 cu. in \$1.50
Carbon Steel New 14/2 78/3 1/9 104 cu. in \$1.50
Carbon Steel New 14/2 78 5 500 cu. in \$1.50
Carbon Steel New 14/2 78 5 500 cu. in \$1.50
Carbon Steel New 14/2 78 5 500 cu. in \$4.50
Carbon Steel New 14/2 78 5 500 cu. in \$4.50
Stainless Steel New 24/2 78 1 1000 cu. in \$4.50
Stainless Steel New 24/2 18 2100 cu. in \$1.50
Stainless Steel New 14/2 18 2100 cu. in \$1.50

U. A. S. Corp. Dept. PS10, 5637 W. 63rd Pl.



The Modern PLASTIC for lasting Home Repairs

PERMANENTLY mends cracks or holes in wood, tile, stone or boles in the stone of the

DONALD DURHAM CO. Box 804-V, Des Moines, Iowa

NEW MIDGET OILER!



DEAL for Inbrientite head to reach parts of most massileer, each parts of most massileer, delicate instruments, and small working parts of all types in working parts of all types in DILER," pen size, has a fine potentie needle, to use, simple the potentie needle, to use, simple the potentie needle, to use, almost of the potentie needle, to use, almost of the potential needle, and
GAUNT INDUSTRIES 827 Irving Park Blvd., Chicago, Ill

Make lasting Metal Repairs

FREE: "Soldering Simplified." 16 page illustrated booklet. Get your copy now.

Kester Solder Company 4254 Wrightwood Ave. Chicago 39, Illinois







Save Fuel Costs

Seal up every heat-wasting

crack, opened seam and other leak in your furnace, boiler, tank, radiators and piping tight -as professional repair men do-with Smooth-On No. 1 Iron Cement. Do it yourself-now-and cut this winter's fuel bills. You apply Smooth-On like putty, it hardens like metal, and stays tight, because it expands slightly as it sets. Buy Smooth-On No. 1 in 134-oz., 7-oz., 1-lb., or larger sizes at your hardware store. If they haven't it, write us.

FREE Repair Handbook

40 pages of ingenious, tested, short-cut repairs. Simple directions. 170 illustrations. Write today for YOUR free copy of the Smooth-On Handbook. SMOOTH-ON MFG. CO., DEPT. 58-K 570 Communipaw Ave., Jersey City 4, N. J.

Do it with THE IRON REPAIR CEMENT OF MANY USES





BURNING OIL PISTON SLAP

V POWER LOSS

MOTOR IN 10 MINUTES with a MOTOR RENEW

KIT

CLEANSE "MOTOR PURGE

In the FIRST step of the famous In the First step of the ramous Motor Renew treatment, the "Purge" formula cleans, quiets and frees rings, valves and pistons from efficiency and power robbing carbon, gums and varnish. Pour this miracle solvent into the cylinders, run your motor and watch the combustion residue billow out your exhaust pipe.


RENEW "COMPRESSION SEAL

RESTORE COMPRESSION... GET NEW FOWER,
with "COMPAND ECONOMIC CONTROL OF THE PROPERTY OF THE PR

FREE Auto Manual With Each Order! \$6.95 (Or send \$1 deposit, balance C.O.D.)

POSTPAID

CONSOLIDATED ENGINEERING. Dept. PSK-10 W. Washington Blvd. Culver City, Calif.

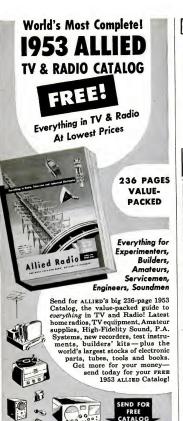

E D

ALLIED RADIO CORP., Dept. 7-KK-2 833 W. Jackson Blvd., Chicago 7, Illinois ☐ Rush FREE 1953 ALLIED 236-Page Catalog. Name_ Address_

STOPS LEAKS PERMANENTLY

bills - with book new awards, water and fuel concentration of the concen



ECONOMY VALVE SEAT CO.

1426 N. Keating Ave., Chicago, III.

WANT TO 1/2 MILLION VE GAS? NOW USE GANES TRY ONE FREE

GANE NEEDLE

IN YOUR CAR! TRY BEFORE YOU BUY!

MANY GAME NEEDLE USERS REPORT US

IT STATES TO THE STATES OF THE STATES

TO LOCATE THE WOOD STUDS IN YOUR WALL



When hanging mirrors, pictures, shelves. Also when repairing or altering. \$2.00 Ppd. Money-back guarantee. The Roll of the Ball Finds the Stud in the Woll You May Need One Tomorrow!

FORD PRODUCTS, Dept. R-1, Tuckghoe, N. Y.



IMPORTED ENGLISH **Sheffield Steel PLIERS**

DREHIGHO STEEL TLLEKS
The finest in toolis Maranticently mechanical
Surfaces highly poblished, Satisfaction absocoast, Check, M. O. or sent C. O. D., 1265, with
orders. We say all results the coast of the coast

-with side cutter, 6½ ln. (Not & 8 in....\$1.95

Shown) ...\$1.80 51/2 in. long. Nose 5/16 in. Special Discounts for wide closed \$1.85 RELIANCE MERCHANDIZING CO. 2211 Arch St. Philadelphia 3, 1

\$ SAVE \$ ORDER BY MAIL

From WHOUS UTOMOTIV WORLD'S LARGEST DISTRIBUTORS

CUSTOMIZE YOUR C. WITH A CONTINENTAL

SPECIAL! Ford-Chevy Economy Kit only Special Indiana, I piece conomy with three slays in trunk, latalitie seality by drilling the bloss, no alterations resulted, they cheme wheel did at no extra blook provided the state of the

self the anti-propose or or and the self-less an

OTHER KIT PRICES

Kaiser (1947-29) . \$138-450 Packard (1951-52) . \$159.50 Cadillase (1951-32) . \$159.50 Cadillase

CUT GAS COSTS UP TO 25%

FUEL PRESSURE REGULATOR!

STOP: Power Loss Fuel Waste

MANY USBEC CLAIM UP TO 25 of BETTER!

MANY USBEC CLAIM UP TO 25 of BETTER!

Many and the second of t

(Or send \$1.00, balance C.O.D.)



SAFETY BELTS

with

without Double Belt Kit

Records show that being thrown spains shield and being thrown out of the car in secidents are the thrown out of the car in secidents are the juries. In most cases, use of a safety seal belt would have prevented those deaths belt would have prevented those deaths lower through the safety of the care through the

Single Belt Assembly..... \$14.95 ppd.



STOP MOTOR

DUAL POINT BREAKER PLATE

Replace your present stork, single point! ignilion with a grees to 36 degrees dwell and also increases coil atturation to full capacity. This plate produces a hotter spark ... giving produces a potent spark ... giving produces a potent spark ... giving present spark ... giving present spark ... giving present spark ... giving present spark ... giving spark available with 50 presion ball bearings. Figs. '37 to dilac V8, also Packard '51 to '52 (with Delco Dist.) \$11.55 existed to the prospare of the present spark ... giving 11.55 existed to the present spark ... giving 11.55 existed ... giv Also non-ball bearing dual point conversion plates for \$6.95 49-52 Ford 6, '37-'52 Chevy, '49-'52 Ford V8 and Mercury, '50-'52 Lincoln: Specify, Postpaid

NEW OIL FILTER ELEMENT NEVER NEEDS REPLACING **GUARANTEED FOR 10 FULL YEARS**

Four Belt Kit (4 passengers).....\$24.95 ppd.

STOP WASTING MONEY!

Famous Filters filters 100% of your oil through bronze cone which never needs the pay for itself by saving the cost of stock oil filter cartridge replacements. Gives maximum motor protection by removing starts. No oil is lost or bypassed, regardless of temperature, and valuable protecties of temperature, and valuable protecting the pay of
(List make and model of present filter and car)

NEWHOUSE AUTOMOTIVE, Dept. AX-10, 5805 E. Beverly Blvd., Los Angeles 22, Calif.

Build YOUR OWN SMITH Compressor

Operates spray guns, rock drills, tampers, paving breakers, sandbiasting . . . Uses only 1 gailon of gas an hour!



Save Money—build your own Smith Air Compressor! Famous the world over! Capacity 60 cu. ft.: pressure up to 100 lbs. per sq. inch. Just order the Smith Compressor Head and Accessories with complete instructions for assembling. All you need is a Ford Motor and shop facilities. Head equipped with high speed compressor valves; automatic unloading and idling.

GORDON SMITH & COMPANY, Inc. 405 College Street • Bowling Green, Ky.

FASTER THAN \$100 ENGINEER INSTRUMENTS! er and imported. The most inexpositive rester oil giving perfect level with easy non-man ne-dition. Ideal for facility, fundation forms, silks, sors, road gradings, devinese, all general con-spects assembly necking \$100 in \$1 r or m n 1 s. page, accurate, forigree! Fest, weather-handy, noty! So feat here question promposes which perf-isted today, little with red Level-7/s liquid. 2

THE DELUXE LEVELALL is also offered with 75' of tubing — on extra supply of Level-File Haid — Bod a Handsoma Deluxe Corryling Coss. rying Cou DEALER INQUIRIES INVITED.

LEVELALL

PERFECTLY ACCURATE ONE-MAN LEVEL

Mall me Constall instrume You goon

ZONE STATE

Wellworth AIR COMPRESSOR

For Farm and Home Workshop

Compressor has 2" bore, 1%" stroke, 2.8 cfm up to 150 lb. pressure. Motor required: 1/4 h.p. at 100 lbs.; 1/2 h.p. at 125 lbs.; 1/4 h.p. at 150 lbs. or equivalent gas engine. V-belt cast iron pulley, intake muffler and cleaner, bronze bearings, splash lubrication. Wt. 16 lbs. Price of com-\$20.50 pressor, as described



MODEL W200 COMPRESSOR

up to 150 tb, pressure, Operates with \(\lambda_2\cdot \)2,2''x2''. 2.55 to 4.80 c.f.m. up to 150 tb, pressure, Operates with \(\lambda_2\cdot \)2,2''34 HP motor. Reg. price \$36.50. \$27.95 Special price....\$

Wt. 24 lbs.



"Wellworth" **BLOWER BARGAIN**

Quiet operating. Double wheel injet, double width Quiet operating. Double wheel linlet, double width blower. For heating, ventilating, cooling, air works. For heating, wentilating, cooling, air works. See the second of t

MODEL W7 COMPRESSOR



WISCONSIN GAS

CONTINENTAL GAS ENGINE Red Seal, 11/2 HP wilb 6 to 1 reduction green reduction gear.
Operates at 450
R.P.M For lawn
mowers, scoolers,
garden tractors,
pumps, compressors, etc. List
Price \$79.50.

ENGINE Big Saving Big Saving. 1952 model. A.K.N. 4 to 6 H.P. Wt. 75 lbs. \$89.50

hipping wt. 54 lbs. \$47.50 Automatic Compressor Units, Light Plants and Genera-

tors at BARGAIN PRICES. Write for descriptive folders. PRICES F.O.B. CHICAGO, MONEY BACK GUARANTEE, SEND CHECK OR MONEY ORDER TODAY, PROMPT SHIPMENT, WRITE FOR OUR FREE CATALOG,

WELLWORTH TRADING CO.

1832 S. Wabash Ave., Dept. B-1052, Chicago 16, III.

TILT/ARBOR

SAW BANDSAW BELT SANDER

Exclusive GIL-BILT Build-It-Yourself Features

No machining-build easily with hand tools only No biscorning result and the state of the state

GIL-BILT 10-INCH TILTING ARBOR SAW 27x28 in. tahie, 13½ tn. capacity tn front of blade io in blade cuts 3½ tn. deep, tilts full 45 degrees Floor model 34" bigh, table always

The flatter cetts were the new test and the flatter cetts with the lawage.

New Denarture hall bearing arbor, 3½ "precials and safet tirred down for 1½ hore blacks and the flatter cetts of the cetts of the flatter cetts

GIL-BILT 12-INCH BAND SAW

GIL-BILT 12-INCH BAND SAW

Clust be restore of 24 lend etter.

Itsudies atock up to 6 lend hitke

Lander sheet up to 6 lend hitke

Lander sheet lend of the line of the lend o

COMPLETE PORTABLE ELEC

HOBBY SHOP Has everything ONCE IN A We GUARANTEE this gold all metal carry-

Beautiful hammered an \$85.00 Value ing case, Famous
100-Pe. Zephyr ½" Drill with
ELECTRIC Hi-speed rotary files;
ONIL SET buff, polish kir, grinding wheel, drills, disc,
te, Tools for every etc. Tools for every

TOOL-MAKERS'-MACHINISTS omic, Aircraft & Jet Plants use for most precise work Compar to any selling 2 & 3 times our price

C.O.D. b.

wow!

LIFETIME

TRANSCONTINENTAL SALES CO., INC. Dept P\$10 947 S. Broadway, Los Angeles 15, Calif

750

PRECISION TOOLS HELIOS 6" Vernier CALIPER

Hardened tool steel; friction lock; inside, ments in 1000ths, 22,50 value. UNCONDITIONAL MONEY-BACK GUARANTEE

SAVE UP TO \$100.00

on your STORM WINDOWS Assemble Combination Redwood or Aluminum Storm Windows Yourself!

These patented storm windows regularly sell for \$22.75 assembled, Now only \$6.50 knocked-down and shipped

to you. With only screen eight and glass to hip leadby your total storm window cost is only about 84.50
by your total storm window cost is only about 84.50
easy washing. Screen replaces to or bottom sash
during warm months—self storing in upper portion
in winter. Frame stays in year 'round, No storage
wood. All standard window sizes. Write for desertpatype of the window sizes. Write for desertpatype of the window sizes with the window sizes. Write for desertpatype of the window sizes with the window sizes.

**Georgia of the window sizes with the wind

ONLY \$65.00

PREPAID

\$6.50* dows. Satisfaction guaranteed or money back, each "Redwood 24/24 Glass-others, slightly higher DEALERS: A few choice areas are still available each

BUCKEYE SCREEN & WEATHERSTRIP CO. 1378 S. 22nd Street, Columbus, Ohio



AMAZING, PERMANENT MAGNETS-WILL NOT WEAKENI NON-ELECTRIC ABALING, PERMAKENI MAGNETI—WILL NOT WEAKEN NOM-ELECTRIC Retrieve guar, accide, nodo and other steel letters from lade, river, taps, etc., from sweepings, Clear alieve of harmful tacks, nails. Many other uses, Pays of Itself quickly, QUAMASTED, Try any magnet not use the pays of the control of the pays of



WE SEND YOU A LATHE—NOT LITERATURE
To Prove by Trial the Bitgest Lathe Value Ever Offered
You're read shout their lates—see an strative ceil, pides, but you
re read shout their lates—see an strative ceil, pides, but you
illerature but we will send you a braid new, the waitly lathe, freight
and. We let you see our lates—feel in—actually maches with it while
turn it freight collect, And what a lathe it let Shortly hallt with bed
core file and is locked with 2 'I valid boilt. Latte may be operate
with a 1s, hab., 1726 r.p.m., motor, field locate, 200 with cutting range
ceich, 2 fremis ceivers. 2 male center, offrield not, arbor statement
and often. The lathe is precision and attently built to lander every metal
or wood jab within its dimension on, lifest for factories, holdy and
pide only \$65.00. 10 day free home trial-you must be satisfied or
interv while the bats. Send cheek or meany order for \$65.00 in
HAMILTON PRODUCTS, INC., 12416 Euclid Are., (Levelend 6, Ohie



OXFORD, MICHIGAN, USA. STOP THOSE DRAFTS!

Dept. G-102

STOP BEING ROBBED BY BIG FUEL BILLS. ASK YOUR HARDWARE MAN FOR KORD. IN A FEW MINUTES TIME YOU CAN SAVE MONEY BY GETTING EASY-TO-USE KORD



THE MODERN WEATHERSTRIPPING



Has hundreds of uses around the house, the workshop . . Caulk KORD is your boat. the new, lasting way to weatherproof or seal against cold air, moisture, insects and dust.

KORD IS MADE BY THE CREATORS OF THE FAMOUS STERLING ELASTIC GLAZING COM-POUND.

See your dealer or write for folder.

STERLING PAINT & VARNISH CO.

185 Commercial St.

Maiden, Mass.



NEW LOW PRICES

Offers greatest selection of fine domestic and imported woods-and hundreds of woodworkers items at bargain prices!

You'll save time and money with this big, new catalog. Contains everything wood craftsman needs. Shows 32 rare and fancy woods in color...43 veneer designs...275 in color...43 eneer designs...275 scroll patterns...multicolor inlays, overlays, bandings...all kinds of tools, machinery, cabinet hardware, ornaments, mouldings...and pages of voluable tips, ideas, information, instruction. Send for your copy NOW. Only 15c--refundable



JIG SAWS

144 PAGES QUICK DELIVERY

on maple, pop-lar, oak, ma-hogany, red cedar, cherry, walnut, and walnut, and many others— all properly seasoned and kiln dried.

on your first order. MAIL THIS COUPON -- TODAY!

CRAFTSMAN WOOD SERVICE 2729 S. Mory St., Dept. 810 Chicago 8, Illinois

Send me the big, new, money-soving Cotolog No. 19. Enclosed is 15c--refundable on my first order.

Nome. Address

> Zone__ State



WHAT A VALUE ADJUSTABLE No. 445 "ARCO-SAW" 0 to 45° ANGLE. RIP GAGE. (shown) Also has VISUAL GUIDE

1150 With ALL GAGES (not shown). out Blade. "ARCO-SAW" THE PLANT OF THE PARTY OF THE P

CUTS 11/4", me as above, less gages. 90-DAY or 2x4 by FACTORY 995 Has accurate GUARAN: turning over visual guide

READ WHAT ENTHUSIASTIC "ARCO-SAW" USERS SAY: Best of all my tools. H.D., Wanvetosa, Wisc.
...a wondarful time saver...very simple to operate.M.H., L.I.,N.Y.
...haven't used a handsav since I purchased the "ARCO-SAW".
D.S., West Roxbury, Mass.

If not available at your dealer, TRY "ARCO-TEE. If you are not completely satisfied, simply return "ARCO-SAW" for a full refund.

GET "ARCO-SAW" TODAY at your dealer or send us check or M.O. (Postpaid). C.O.D.'s postage extra. Write for DEALERS: Write for literature of other tools.

ARROW METAL PRODUCTS CO.

DEPT. PS-10, 140 WEST BROADWAY, N. Y. 13, N. Y.



Ideal for hobbyists, craftsmen, repair shops, garages, model mfgrs., experimental labs, etc. Handles metals up to 1/4" thickness depending upon hardness. Shipped complete with 1/8", 1/6" and 1/4" punches and riveting dies. Check or money order must accompany order. No C.O.D.'s. Money will be refunded if not fully satisfied.

ALBERT J. TATU CO. 85 Columbia Dr. Dept. G2 Williamsville 21, N. Y.

It's NEW, BIGGER, Better The DELTAGRAM.

. 6 GREAT ISSUES Only \$1.00 e

Priceless information at a wonderful bargain price—The New, Bigger, Better Deltagram!—With more than 100 shop-tested projects, complete plans, "how to do it" instructions—6 times yearly all for only \$1. Nothing like it at any price!

Subscribe now . . . write to DELTA POWER TOOL DIVISION Rockwell Manufacturing Company

504L N. Lexington Avenue Pittsburgh 8. Pennsylvania

NEW, IMPROVED CALCULATOR FOR WOODWORKERS only 25c Instantly gives information on lumber,

nails, concrete mixes, painting materials, etc. Convenient, simple to read. Just set dial for nail specifications, to convert linear to board feet, find bit sizes for screws, compare characteristics of woods. 6" diameter heavily varnished cardboard, 25c, no stamps, please to Greenlee Tool Co., 2130 Columbia Avenue, Rockford, Illinois.

SAVE MONEY-ON PAINTING

FREE BOOK TELLS how to get better paint results at no extra cost. Given free by America's leading aluminum producer so you can get full value and satisfaction from aluminum paint. Written by experts . . . packed with facts . . . write for "Paint it Bright." Aluminum Company of America, 1717K Gulf Bidg., Pittsburgh 19, Pa.



DRILL GRINDER

Sharpens round shank drills from 3/32* to ½ 'n diameter, up to 6' 'long. Grinds old drills like new in 4 different point angles, using hand or power grinding wheels. \$2.95 At Dealers or Postpaid

At Dealers or Postpaid

A.D.McBURNEY 317 E. 4th St., Dept. S-22

Los Angeles 13, California

BUILD ARCEWELDER FROM OLD WE SHOW YOU HOW Light or Heavy Work

Produces 75-200 amperes. Takes no previous experience or hard work to make one of these welders. Complete plans 35c, Send for your PLANS today and we'll include FREE our Big NEW Catalog list-ing hundreds of electrical bargains. LEJAY MFG., 1323 LEJAY BLDG., MINNEAPOLIS, MINN.





280 POPULAR SCIENCE

15 Combinations! Professional MICROSCOPE 52

Model #635

Ppd.

At last 1 he FIRST instrument with this range of performance ever offered under \$125. Every feature needed for advanced university, pre-med and medical school use. Triple revolving furret containing 10X, 20X and 40X cleanser, 6-aperture revolving first. Two-side plano and concave substage mirrors. Solid base, excellent precision construction. Complete with fitted hardwood case. With 15X eyepiece (giving 150X, 300X & 60X) less mechanical stage.

SET OF EXTRA EYEPIECES \$9.95 Ppd.

For above model #635 microscope. 4X, 5X, 8X, 12X interchangeable eyepleces in hardwood case, giving a total in all of 15 different powers from 40X to 600X. Complete set of 4 in case.

MODEL #400 MECHANICAL STAGE \$14.95 Ppd.

Shown on model #835 microscope. Made only for this instrument. This is an optional accessory which also an optional accessory which also acceptably right, left, up or down without touching side. This call-brated stage cannot be duplicated for less than 345. (If microscope is ordered without mechanical stage we will if it your instrument with fine spring steel, clip-type silde holders.) Shipped in fitted hardwood case.

100 200 300 POWER

Triple Turret MICROSCOPE \$14.95 Ppd.

Laboratory Model — The Instrument that amazed biology Instructors. Excellent optical qualities, adjustment, solid construction. A justment, solid construction. Ilfetime bargain for students, schools, labs, amateur reschools, labs, amateur researchers. Anyone can now own one! (Performance cannot be duplicated for \$75.)
Uses: animal, plant and mineral research. Study plant cells, microscopic animal life crystal structure. See the complex anatomy of tiny insects, larvae, eggs. An absolute necessity in hundreds of fascinating fields. Shipped in hardwood cabinet.



NAVY TYPE MARK XX

20 POWER TELESCOPE

\$9.95 Ppd.

\$30 value. Fine optically ground achromatic lenses, fully coated, Same power as standard artillery observers spotting scope. Precision all metal construction. Rust and salt spray resistant. A valuable ship and boat owner's possession at a price everyone can afford. Excel-lent scope for rifle range or hunting. Shipped in choice of pigskin case or hardwood cabinet.

8 x COATED PENSCOPE

\$4.95 Ppd. 4--- CLOSED

ard army binocular.

Pocket telescope fits

in your pocket like a pen, extends to form a powerful scope for spotting game, watching sports. 8 power coated lens, more powerful than stand-

SEND FOR FREE 32-PAGE CATALOG

World's greatest values in habbyists, students, world's grediest volues in naoupaiss, students, and prafessional research microscopes, complete accessories, mechanical stages, eyepieces, prepared stides, dissecting microscopes, ore, mineral, metal and gem microscopes, binaculors, telescopes, magnifying glasses of all types. Every tiem a borgain — with money-back guaranteel

AKRON (400 SUNSET BLYD

Dept. 10-5



I N

POSTPAID

A 5-in-1 hand tool with a hundred uses, Drills, saws, reams, rass files all wood, conduit and plastic. Praised by electricians, hobb ists, plumbers, carpenters. Has a tough plastic bandle-drill pol -8 inch case-bardened carbon steel spiral cutting blade. Mon Back Guarantee. Send cash, check, or money order to.

THE A&F MANUFACTURING CO., BOX 323A, ST. JOSEPH, MICHIGAN INVITED

GET MORE

FISHER'S COMPRESSION

- * Stop Burning Oil!
- * Restore Compression!
- Save Gas!

A small arraunt of Fisher's Compression SEAL in each cylinder bore will give you the economies of smooth, powerful (new cor) performance and reduced oil consumption. \$25,000 indemnity insurance is your assurance it cannot harm the finest engine. Old cars may not need expensive overhouling

SATISFACTION GUARANTEED

Only Fisher's Campressian SEAL affers you their exclusive Satisfaction Guarontee. Return the used tube, if not campletely satisfied. Only \$3.95 postpoid. Free illustrated falder. Send cosh, check ar money order taday. Dealers, a postcord will send aur representative ta your door.

ADVANCED ENGINEERING

Dept. P5-10, Box 7013 Los Angeles 37, Calif.





SAVE UP TO 90%

METALMITRE makes mitering of metals easy

METALMITE makes mitering of metals easy Unique hand tool mitres metals with ease and precision. Takes the chines. Can be carried on John Schotz, and the control of the chines. Can be carried on John Schotz, and the chines can be caused the carried on John Schotz, and the chines can be caused the carried on John Schotz, and the control of the chinese can be caused the carried on


WILLARD WET PLATE BATTERY

WILLARU WET PLATE BATTERY
Extra-long life, rechargeable battery, 2 V. 20 Amps.
Great for portable radios, mobile units, bell circuits,
alarm systems, rural telephones, Strobo bulbs, etc.
Only 5" high. Visible ball float hydrometer built in
Lucite case, Shipped dry (Wt. 3/2) fb.3), . . any battery
singly or in multiples, ALL NEW; Now only \$1.95 es.





D. C. GENERATORS

Finest sirrart quality heavy duty infection grass-sealed ball bearings. Terrine for truck and marine use, for welders, plating, truck and marine use, for welders, plating, truck and the property of the prop

FLEXIBLE SHAFT MAGNET
For picking up coller pinn, nult, wrenches, etc.
from inaccessible places. Removes Bobbie Pins
etc. from drains Lifetime Magnetism Guarantee
Highly polished magnet and handle



ome plated, precision engineered, carefully ed to give long life. All new 0-1" capac-\$2.25 ea 1-2" capacity-\$3.50.

for 1952 catalog. Bargains for everyo Cash. 25% deposit on C.O.D order tv. Calif., unless otherwise stated.

or City

INC., Dept. PS 1052 8501 Stellar Dr. Culver City, Calif.



Keeps engine oil sparkling clean. Eliminates expensive oil changes and costly element replacements. Inexpensive to buy. Easy to install on all gasoline engines up to 14 quarts crankcase capacity—automobiles, trucks, tractors, stationary and marine engines.

Enthusiastic testimonial from thousands of individual and fleet users. Write today for FREE "Tissu-Pak Facts." Mailed immediately.

HENDERIZE, INC. • 5667 - E2 FREEPORT BLVD.

PAINT ROLLERS cleaned in seconds Just put the roller cover into a can of

Imperial Roller Cleaner and shake. In 30 seconds It is completely cleaned! Remove, wipe dry and you can re-use immediately. Same fluid may be used for as many as 6 cleanings. Safe for roller cover and your hands. At better paint and hardware stores,

IMPERIAL Roller Cleaner Write for leaflet

Wilson-Imperial Company, 121 Chestnut St., Newark 5, N. J.

HOBBYISTS! SHOPMEN! Special (\$5450

PALMGREN "HOBB-E" Rotary, Index, Milling Table Ideal for Model Parts or Shop Work Table Robert and Mortes on drill press or India, 80 miles of Mortes on drill press or India, 40 Cross Feed, 300° Robeton, Accept State Robert Parts of Mortes on drill press or India, 40 Cross Feed, 300° Robeton, Accept State Robert Parts of Mortes on drill press of India (India) and India





SEND 15¢ TO COVER POSTAGE FOR NEW ILLUSTRATED 28-pg. CATALOG X-ACTO CRESCENT PRODUCTS CO. INC., 440 FOURTH AVE., N. Y. 16, N. Y.

NEW Saw Sharpener

Improved #64 Hand Gummer sharpens all types circular saws 4" to 20" diam. Ideal for saw shops. Self-Centering adjustment for quick, easy set-ups. Complete with 14, HP motor, 1 grinding wheel & cord. \$79.50 FOB Portland. Wt. 70#. SEND FOR FREE LITERATURE.

P. T. HOBBS MACHINERY 8375 N. Interstate Ave. PS-102. Portland 17. Ore.



TRANSFORMER \$1895 FOR WELDER SUINCY

Complete with everything. Ready to plug in. 110 volts A.C., 15-30 amps. 3 heats. Welds metal from 1/16° to ½/4° using 1/16° to 3/32° standard rods. Guaranteed unconditionally. 10-day trial. No C.O.D. We also make welder for 16-22 gauge metal, \$3.95; ½/4° metal \$8.4°.

ESSAY MFG. CO., INC., Dept. 47, Quincy 69, Mass.



GENERATING PLANTS

FROM 350 WATTS TO 25 KVA Item #183-3000 to 4000 WATT GENERATOR

UNCONDITIONALLY GUARANTEED



General Motors-Allison CENTRIFUGAL PUMP 200 GALLONS PER MINUTE

This Govern Motors Allian Contributed This Govern Motors and the Contributed This Govern Motors and the Contributed Contribute

HYDRAULIC SPEED REDUCER WITH FINGERTIP CONTROL

HANDLE SE BUTTON FILLER PUGE

WITH FINGERTIP CONTROL

Midget Cars • Feed Milis • Canning Machines • Conveyors •

Midget Cars • Feed Milis • Canning Machines • Conveyors •

OUTBUT • Meter Beats • Cream

SHATT Separators • Garden Trac
Tors • Pumpa

The Pumpa

The Corresponding to the Control

The Corresponding to the Contro FILLER PLUG

motor.

NEW MODEL 353-DUAL RANGE D. C. ARC WELDER OF SERIONY OF POTENT USE. REAVY
TOPY SERIONY OF POTENT USE. REAVY
TOPY SERIONY OF POTENT OF THE POTE

FREE: NEW 48-PAGE BARGAIN CATALOG, Write Today! ORDER DIRECT FROM AD-SEND PAYMENT OR PUR-CHASE ORDER TODAY-SATISFACTION GUARANTEED

SUPPLY CO. DEPT. PS-10



This Kit creates that "Continental Look" at a price you can afford.
Given the impression of britise built hold the time, or the continent of t

← Send For Our New Catalog



The World's Largest Auto Accessory and Parts Catalog, Save Money on "Everything Automotive", Over 50,000 items, including Hollywood glines, all parts and accessories for all cers and trucks. We have that hard-to-get part, Over 100 peges, completely illustrated, Send 50c (refundable).

J. C. WHITNEY & CO. 1917-CJ. Archer, Chicago 16



FACTORY TO YOU

SUPERSHOP offers you a precision-built complete power tool work-shop, 100% ball bearing, RUGGED. Accurate. Big capacity, 15 day FREE trial. Money back guar-antee. Mail postcard for FREE catalog. Buy on easy pay plan.

POWER TOOLS, INC. 240 Yates Ave.



OCTOBER 1952 283

STOP WASTING MONEY ON NEEDLESS OIL CHANGES!

YOU CAN EVEN USE CRANKCASE DRAININGS!

"RECLAIMO

Refines Oil As You Drive—Fits Any Car!

U. S. Bureau of Standards says, "Oil never wears out mechanically." Why change it?
Just purify it! RECLAIMO uses engine heat to refine oil continuously. Removes not only impure solids, but also water and dangerous dibution that causes "creative". dilution, that causes formation of sludge and corrosive engine acid. Be safe and sure . . . all year round . . with RECLAIMO . . Yet never again spend dollars on oil changes! Write today for details of our 90 DAY MONEY-BACK GUARANTEE OFFER.

GET THIS VITAL BOOK



THIS VITAL BOOK
32 page "OIL FACTS" opens your
eyes to lubricating facts you
never dreamed of! Why and how
big users like Greyhound use oil
for 200,000 miles, etc. etc. Send
25c for book, refunded if you
order RECLAIMO, Write to P-9

RECLAIMO MFG. CO.

5083-85 Elston Avenue, Chicago 30, Illinois Wm. Schwalge, U. S. Pats. 1757223, 1834654, 2068473


IT YOURSELF IN A JIFFY .

Weld, Cut, Braze, Solder IRON, STEEL, BRONZE, BRASS, ALUMINUM & OTHER METALS

ALUMINUM & UITEK MEIALS
Tool and Equipment breakdowns are
always annoying and costly. Don't
let them bother you. Get a Dynamic
on your very first job. Welders operate from any properly wired 110 V.
AC line. The handiest "tool" in your
workshop. A Dynamic Welder will
save its low cost over and over again
in time and money.

DYNAMIC INDUSTRIAL type transformer Arc Welder 75 omp, output for Indus-trial or Workshop use.

DYNAMIC WELDER CO Dept. D3-KC, 15 E, 23rd St.











Hold, start and set up screws in unhandy places. Gripper instantly released by SPRING ACTION, sliding up out of way when not in use. Highest quality throughout,

New Models FOR RECESSED HEAD SCREWS + +

UPSON BROS., INC., ROCHESTER 4, N.Y. At Leading Dealers Everywhere







Walking or Riding Tractors
11/4, 3, 5 H.P. walking models, 6, 8, 12 H.P. riding tractors, Get just the power you oeed in Shaw extra strength apperior traction machines. All wanted tools,

Trees of Saw Wood

SHAW Mfg. Co. 668-PSN. 4th St., Columbus, O.

AS...5000

Take BELSAW Portable Sawmill right to the trees—turn out valuable lumber for local wards—do "custom sawing" for neighbors.

BELSAW lisats a lifetime. No crew needed, EELSAW lisats a lifetime or specific segments get excellent results. Send postcard for FREE BOOK.

BELSAW MACHINERY CO 8464 Field Bldg. Kansas City 11, Mo



ROUTING WOOD IS EASY

ON YOUR DRILL PRESS

With these useful precision ground routing made from Heat-Treated Alloy Steel, Will et Illess widths of straight or euryed recesses, nels and shoulders. These routers will automa follow any sel profile to full shank depth. Can lly sharpened again, and again, or can be m

EDWARDS & MORTON CO. P. O. BOX 1828 HARTFORD, CONN.

DRAINS Cellars, Laundry Tubs; CIRCULATES Oil: IRRIGATES Gardens

CIRCULAIES UII; IRRIUALES UNITURES
Original "Type P" Pump has 2400 OPH Capacity,
300 OPH 75 high, or 1500 OPH from 25 well,
Use any 14 to 15 HP motor. DOES NOT CLOG.
See Topular Science, August, Page 200
See Topular Science, August, Page 200
See Topular Science, August, Page 200
MONEY BACK GUARANTEE!
Also Geer Pumps in all sizes.

LABAWCO PUMPS, BELLE MEAD 3, N. J.

When Writing to Advertisers. Please Mention Popular Science



DOES 11 THINGS

NO OTHER 6-INCH SLIDE Get the Jump or poor fellow workers by difficult mathematical problems AT LEAST 125, PATEST Practice Security of the poor of t

EVER DID! No. 600 THE MOST POWERFUL POCKET RULE EVER OFFERED Write for FREE FOLDER showing 17 famous Pickett & Eckel Rules...over 350,000 now in use... sold in leading stationery stores.

350,000 now in use ... sold in leading stationery and in leading stationery 30-DAY MONEY BACK QUAL Order today ... we'll refund if you are not 100% satisfied leather case and manual compleantly \$8.25. (West of Denver—Order NOW ... TODAY!



BAUER-LEE & CO., SIERRA MADRE 5, CALIFORNIA

rom Caff-vou'll Save and be sure

OR DUMB WAITER ELEVATOR OR DUMB WAITER ELEVATOR
Get all the convenience of a dumb
waiter elevator for store, shop, resman licitude (elevator on steep lake
shores, hills, ravines, etc. at lowest
cost. We furnish compilete paris, Steel
cost. We furnish compilete paris, Steel
ble, Send 22s for completely diagrammed instructions with list of
paris, kits and prices.

ALARM HORNS . SIRENS

ALARM HORNS
or driven (not a vibraHeavy dnty with great
er and tong life. Adshie for high, medium
ow tone. 110 v. AC curWeather proof. For
mor signal born on
s, school yards, factoair raid siren, etc.
at \$47, Our price rent. ries. Lists



POWER and HAND WINCHES FOR—BOATS, TRUCKS

rARMERS, LOGGER CONTRACTORS, ETC. Hand winch, 3-1 r. tio, 600 lb. pull, drughas 15% spool, 6 flange, takes 75' c 3/16" cable, sto locking navel

h ratio 5-1, 600 in winch, 100 cm 210 cm 21 cm 21 cm 22 cm 2

BOOSTER FANS at any churace pipe, 1500 rpm motor with 6' cord, mounting frame, 7' blade. Motor 110 volt 80 cycle 1530 rpm, Easy to install. Slient operation. Warm those rooms with long runs.

High Volume BLOWERS Top performance for forced draft, ventilating, exhausting, cooling and drying, 110 v, AC.
75 cu, ft. per min. 13.95
300 cu, ft, per min. 17.95
500 cu, ft. per min. 36.00

ELECTRIC HAND SAWS Compare these sensational prices Ail New Brand Name SURPLUS Electric Saws, 110 v. AC-DC fan cooled motors, light-weight design, balanced for easy handling in any position. Can be adjusted for depth and angle of cut. Ripping guide



HEAVY DUTY RUBBER ELECTRIC CABLE

RUBBER HOSE

ELECTRIC MACHINE Co.

438x W. Juneau Ave., Milwaukee 3, Wisconsin

nobben HOSE
ng wearing GOODRICH 2
/ 2" I.D., 25 ft. lengths
irth \$25. Only \$4.95; 3
ngths for \$12.00



Inc.

WAR SURPLUS POWER UNITS

BE PREPARED

for any emergency:
300 WATT 110-220 volt AC, 60 cycle light

powers or J.HF gas sagine, direct drive, moented term, home irrilers, etc. Easipped with handle term, home irrilers, etc. Easipped with the control of
10,000 WATT 110-220 v. AC. Reconditioned....

25,000 WATT 220 v. AC, 3 phase or 110-220 v. single phase, Reconditioned \$1995, New \$2495. 35,000 WATT 110-220 v. AC, Diesel. Rebuilt \$2995

.3. Milwester. 25% deposit requires on C.O.B. orders. No. C.O.D.: ander Std on the other st

Start Your Own PROFITABLE BUSINESS At Home Start Your Own PROFITABLE BUSINESS At Home Full-Spart Films. MoProvious Experience Needed. Health Spart Films. And Provious Experience Needed tors, hardware stores, carpenters, cabinet shops, home owners, farms—mail orders tool L. Leelerc in New Hampshire asys; "Sharpened Y asws in one short of the short of the short of the short of the BURRS" "Pays—spout-Profit" income Plan that shows you how to start small without overhead the short of the short of the short of the line security. Send no money – just your name

BURR'S PLAN MADE ME \$1500 SPARE TIME TZAS

and grow to full-time saw repair snop with life-time security. Send no money - just your name and address BURR MFG. CO., 8943-D Venice Bird., Los Angeles 34, Culif.

Unlimited Capacity

Only ShopsMITH has horizontal drill, with 4' quill feed, time-saving jigs, unlimited capacity. Rugged unit converts to saw, sander, lathe and vertical drill press. Write for free catalog.

SHOPSMITH, Dept. 226-A 12819 Ceit Rd., Cleveland 8, O.



META L BR

ice, flanges, Pittsburgh ics, 24 G, steel, heavier slum. Cam locking, mount bench, truck or floor stand. lock, 30°, 65°, 1bs. \$28.50, 75°, 1bs. \$33.00, 48°, 100°, \$48.00, Portable fits its standard flanges from the second



24" CURVE FORMER. Forms straight and tapering pipes 2" to 2 ft. dia. 16 Gauge. Express collect. \$9.50 (Immediate delivery, Order direct, cash or C.O.D., or send for folder.)

VYKE BRAKE CO., S-III 6 So. 27th ST, Omaha S. Nebr-

For that man among men who works with his hands. He's always wanted power tools, but he's been too unselfish to buy them for himself. Give him a PET Power Tool for Christmas!





Gold-tone finished 1/4" drill. In gift box, \$20.95





Zip-Sawer Jr. converts any 4' drill into a portable saw. In gift box, \$7.95



Favorite of "BO-IT-YOUR-SELFERS"

PORTABLE ELECTRIC TOOLS, INC.

320 W. 83rd St., Chicago 20, III. In Canada: Portable Electric Tools, Ltd., Toronto, Ontario

OCTOBER 1952 285

Half-worn BRAKES MADE BETTER THAN NEW!

Double new lining life!

Apply COP-SIL-LOY-the brake conditioner proved at Indianapolis; on road racing cars, busses, trucks, taxies, passenger cars. NOW AVAILABLE FOR USER APPLICATION.

ANDY LINDEN SAYS, "Cop-Sil-Loy helped me break the track record at Indianapolis this year: I could five farther into the lurns because I could depend on my there was no fode, no wear. I had brakes to spare." (Cop-Sil-Loy was used on 3 of the 4 cars that broke the qualifying record.)

Cop-Sil-Loy impregnates linings and drums with Copper-Lead Alloy, it's a dry lubricant—stops squeal, it prevents over-native processes of the control of the

ORDER TODAY ON MONEY-BACK GUARANTEE Cop-Sil-Loy Kit contains more than enough to treat brakes on any passenger or race car. Apply Cop-Sil-Loy as directed. If not delighted with results, write for refund by return mail. YOU BE THE JUDGE.

Send \$1 sah, money order or personal check, Pay postman \$1,35 plus postage and C.O.D. on delivery. Or, send \$4,55 propepald delivery. POSITIVE SATISFACTION OR YOUR MONEY BACK.

ABBOTT-KIPLE CO. 11001 W. Santa Monica Boulevard West Los Angeles 25, California





Imagine the tough jobs you can tackle with TON-GRIP in your hand! Only VISE-GRIP locks with such tremendous power. Won't slip. Holds, turns, twists, pulls, cuts . . easily adjusts to ratchet action. A locking wrench, super-pilers, vise, pipe wrench, end wrench—in a SINGLE TOOL! 7" and 10", with or without cutter. Only \$1.85 to \$2.00 at your hardware dealer.

Manufactured Only By

PETERSEN MFG. CO., Dept. M-10, DeWitt, Nebr.

NOW-40 different CUTS with AMAZING. NEW



Warren DADO SAWING WASHERS

On Your Saw Blade Just dial widths to cut parallel grooves perfectly

smooth. No warp, vibration or trick screws. Strengthens blade, perfect balance. GUARANTEED! At your dealer's or order direct. Give arbor size-1/2", 3/8", 3/4", 1". ONLY \$495 PER

Send for free booklet WARREN WASHERS COMPANY

Dept. 50, Box 98, North End Station, Detroit, Mich.



Speed Way Speed under SANDS, SMOOTHS, CLEANS, BUFFS, POLISHES

This motor-driven, all-ball-bearing, orbital motion finishing sander works any wet or dry abrasive - 3 covers from standard sandpaper sheet makes it easy to finish or refinish furniture, woodwork, walls. Ask your dealer to demonstrate.

SpeedWay Mfg. Co. 1864 SO. 52ND AVE.



Start a NEW BUSINESS! or Add to your present Repair Business

SHARPEN DULL PIPE WRENCHES PIPE TAPS & DIES "GUM" CIRCULAR SAWE

Write for Information J. C. MOORE INDUSTRIES BOX \$ 276, Fredonia, Pa-



BRONZE FOUNDRY

Schools and Home Workshops Make your own castings of alumisake your own castings of admin-num, copper, bronze, silver. Foundry sets are available in three sizes in-cluding 2400 Deg. F. blast Furnaces, \$22.50; \$29.50; and \$42.00, f.o.b. Kansas City. Free Circular.

KANSAS CITY SPECIALTIES CO. P. O. BOX 6022, Dept. S-10

portable • pocket size " ELECTRIC DRILL



drill press. No holes to drill. Cuts directly into wood and plaster. Ideal for metal. No sears or bearings. No exposed moving parts except blade All-metal construction. Folds up to \$\frac{1}{2} \times 4" Weighs only \$11 oz Complete, ready to use.

LIFETIME GUARANTEE RUSH ORDER TODAY TO DEPARTMENT A-16

J. Z. COMPANY, 4818 Prospect Av., Kansas City, Mo

286 POPULAR SCIENCE



New Thrills for Model Railroaders!



Hundreds of new ideas that will save you money and make model railroading more fun than ever! Shows how to lay your own track, how to make automatic signal systems, culverts, roundhouses, tunnels,

switches and other modern railroad equipment. It's easy to follow the clear, simple instructions and diagrams in this new book. Shows how to make freight cars, baggage cars, pullmans and day coaches. In addition, there are complete instructions and blueprints for building a Pennsylvania R. R. type locomotive.

SEND NO MONEY

Just write for your copy of MODEL RAIL-WAYS today, and pay the postman only \$2.49 plus a few cents postage on delivery. If you prefer to remit now we pay postage, Money back if not satisfied. Address

POPULAR SCIENCE MONTHLY-Dept. 1052

353 Fourth Avenue

New York 10, N. Y.



Dustite G SEALS METAL CASEMENT

Flexible sealing lip controls Dust, Draft, Roin, Bugs, Seals

DUSTITE PRODUCTS COMPANY

6 CANTERBURY DRIVE, DAYTON 9, OHIO

REWHOLDING SCREW DRIVER

Here's one tool every craftsman, carpenter and mechanic needs...the original non-slip, screw-holding screwdriver by HUNTER. Simply place tip in screw slot and push gently: screw is firmly wedged to blade tip. Easy to start screws in most difficult places. Holding mechanism is all internal, fully automatic. Tough 4140 Chrome Moly shaft, Shockproof, plastic handle. 81/4" long, .040 thick point for #7 to #10 screw slots-best for most uses. Fully



mitty DRIVER



Wouldn't sell mine for \$5 if I couldn't get another -say thousands of daily users. Fits all standard Allen type or socket-type bolts and screws. Handle gives great leverage. Equal to a whole kit of socket head wrenches. 5 sizes of shafts, each swing out like a knifeblade. Fits setscrews #10 to 7 in inclusive, cap a knifeblade. Fits setscrews it is setscrews it is setscrews it is by it inclusive. \$150
SATISFACTION OR RESATISFACTION OR REPOSTPAID

HUNTER TOOLS BOX 7395 LUGO STATION • Los Angeles 23, California

OCTOBER 1952 787



Positive, dependable electric choking gives quick, easy starts every time in any weather. Smoother warm-up . . . no stalling .no flooding...no seasonal adjust ment! Fits any car equipped for automatic choking. \$5 complete.

Sisson Choke, 1654 Ohio Avenue Anderson, Indiana Please send me FREE illustrated Electrimatic folder I enclose \$5 (check or money order) for one Sisson Electrimatic Choke with complete instructions

| Car Make Carburetor Make | | | |
|-----------------------------|------|-------|--|
| | | | |
| Address | | | |
| City | Zone | State | |

DRILL PRESS OWNERS!

HERE'S 1 TOOL WITH 5 DISTINCT USES THE BARRON MULTI-PURPOSE

ROTARY WOOD PLANER PLANES & SURFACES . PANELS & BEADS ST COMPLETE ROUTS & GROOVES . RABBETS . TENONS

Finest precision performance—certainty of skilled workmanship—time-saving, money saving short cuts—yours with world famous Barron Drill Press Tools, Fifteen important operations—all available on any standard drill press with Barron Accessories. Equip your shop with these ver-satile exclusively designed tools—and save up to \$500. 200,000 Barron owners have bought on our liberal 10 day full money back guarantee. Order, or write for catalog. BARRON TOOL CO. INC. 356 Architects Bldg., Detroit 1, Mich.

FILE SAWS THE RIGHT WAY SUPER FILER No. 9

B USED AS JOINTER

this new filing jig and jointer anyone can now sharpen to new! When file hits hardened steel rollers teeth are ACTLY SAME HEIGHT. All teeth cut and saw runs true g and instructions \$2.95 postpaid. Free literature.



AT DEALERS OR POSTPAID 317 E, 4th St., Los Angeles 13, Calif. Dept. S-22 McBURNEY

INSIDE-OUTSIDE PAINT PEELER

"Paint-Dozer"

\$995

Strip paint to bare wood at rate of 6-10 feet per minute! Big 16 sq. in. heating area blisters paint ... attached rear blade strips it off in one continuous motion! Ideal for house exteriors, boats, cabinets, all woodwork. Excellent painter's tool! Faster, neater than blowtorch! Operates on household electric current. Even beginners do fast, clean work with "Paint-Dozer". Has long-lasting ceramic 1,000° Hi-Temp heating element; heavy stamped-steel construction; Marinite insulation; pistol-grip hardwood handle. Complete with front and rear detachable blades and skids; groove and ridge cleaners; 8 ft. neoprene cord; safety stand; attachable front guide handle for horizontal work. Fully guaranteed! Order from your dealer, or write today for this professional tool. Fast shipment.

OTTO KONIGSLOW MFG. CO., DEPT. S2 3610 PERKINS AVENUE . . . CLEVELAND 14 . OHIO



N. PLANER Does All Ordinary roots. Provides attachments for Jointing, tring, Tongue, Groove, Matching, 124 x 6-tity, 3-knife solid round all-stest cutin. capacity, 3-knife solid round all-stest cut-turhead. Power feeds at 24 feet per minute, 45 cuts per inch. Provides for full line of accessory attachments—Grind and Joint knives IN THE CUTTERHEAD WITHOUT REMOVING.

BELSAW MACHINERY CO 1022 Field Bldg., 315 Westport Rd., Kansas City 11, Mo

rint Your Own



Cards, Stationery, Advertising, labels, circulars, photo and movie titles, church work, tags, etc. Save money. Sold direct from factory only. Raised printing like engraving, too. Print for Others, G Profit. Have a home print shop. Easy rules supplied. Pays for itself in a short time. Write for free catalog of outfits and all details.

HYDRAULIC POWE



FREE

Workshop

Guide &

Speeds O to 550 Reverse ction: Adjustable ids. 5% Input and le 1/4 to 11/2 H.P. long 7" high 61/2" Automatic Overload Protection: Adjustable Torque up to 180 inch pounds, 5% Input and Output Shafts, It will handle ¼ to 1½ H.P. Motor. Case measures 7½ 'nog 7* high 61½ 'nog 7* high 61½ 'nog 7* high 61½ 'nog 7* high 61½ 'nog 10% Deposit. on only \$54.50 only \$6. Chicago

DIRZIUS MACHINE SHOP "S" 1423-25 So. 52nd Ave., Cicero 50, III.

1953 EDITION It's New! It's Different! Get world's largest

It's New! It's Different! Get world's largest Auto Accessory & Parts Catalog and save money. Over 50,000 Items, including Hollywood Accessories, Ill-Speet Equipolity of Accessories, Ill-Speet Equipolity of the Speed Catalog and Catalo

J. C. WHITNEY

1917-F Archer

Chicago 16





No experience needed. No experience needed. Follow iron, steel, bronce, brass, alluminum, and other metals. Piugs into any property vired it now into any property vired it now into any property vired it now in any property vired in the steel and others. Repair mere, farmers, tinger and the steel and others. Repair mere, farmers, tinger is not to be any for itself over and over. Order today or send for Free details.

FOUR-WAY WELDER COMPANY, Dept. F3-KC 2326 So. Michigan Ave. • Chicago 16, Illinois

LARGER EQUIPMENT AVAILABLE







Mechanical Sports Are Coming

[Continued from page 99]

skill in preparing his machine as well as his skill in handling it. In the near future we may expect developments of great interest by such things as the use of rockets to gain rapid acceleration in all kinds of motor racing.

"Speeding up" is only another phrase for civilization and we are observing its effects even in the more conservative sports, such as fishing where "radar" has been used to

detect fish. Deep-sea fishing has been conducted with radio attachments to a harpooned fish and there seems no reason why such an apparatus should not be attached to a fox.

It is, perhaps, a pity that the tradition of "working sport" has almost died out. Covent Garden porters used to test their skill in carrying baskets; Paris waiters, their speed and


sense of balance in racing with loaded trays. Tree-felling has become an established sport down under in Australia and log-rolling is

popular in Canada.

There are great possibilities for the development of more mechanized sports in connection with industry. We may yet see competitions between giant grabs removing a pile of debris. It is plain from the crowds of "rubbernecks" who watch "men at work" that this kind of thing has a certain spectacular appeal and it has the advantage over older sports in that it is useful. As in motor racing, manufacturers would be stimulated to produce faster, more reliable and more efficient machines.

The Floor Will Dance

Or we may see races between radio-controlled planes in which there will be a test not-only of mechanism but of the skill of the controllers. The development of such sports seems to be foreshadowed by the extreme interest of the younger generation in such things as powered aircraft models. Young men would take more readily to the sport of kings if the electronic jockey became fashionable.



It is very much more useful and sensible to engage in sports which stimulate quality and research that can be applied in industry. Science has contributed a great deal to all sports. Tennis balls are now kept in refriger-

ators so that they will have uniform bounce. Footballs are tested for their bounce by ingenious machines instead of by the naked eve.

New methods of making golf balls have been devised which make them travel farther and truer. Even fishing reels have been improved so that errors on the part of the angler do not re-In boxing an electrical machine could sult in overrunning or register blows struck below the belt. breakage. In the notdistant future we may

see the same urge applied to sports derived from more productive industry.

Sport Aided Aviation

There are many precedents. The bullfight and, more recently, the rodeo, evolved from purely utilitarian practices into pure "sports." Early aviation was greatly stimulated by the sporting element; the development of the aircraft for military and commercial purposes came much later. Without the early races and meetings the airplane might have remained for many vears as a clumsy and useless affair of "bamboo and string."

We are approaching the time when the majority of human beings will belong to the "idle classes." It will be a tragedy indeed if, science having provided the leisure, men and women can find no better use for it than a search for forgetfulness. END

How Pig Can You Get

The price of hogs has been steadily advancing. but the road hogs are as cheap as ever. Fireman's Fund Record

This One

BUY WHOLESALE FACTORY SAVE 50-85%



SOUTH BEND 141/2" LATHES



When tolerances start slowing up output, then is the time you need South Bend 141/2" Lathes. Many plants have found they can save manhours and material by running the tough operations on these precision lathes - this is the type of work they do best. Their versatility enables you to keep them busy on a wide variety of work with a minimum of set-up time. Many attachments are available for special classes of work, Find out now how these lathes can give you efficient machining - mail the coupon below today.

SPECIFICATIONS

SWING: 14%" over bed and saddle wings; 1014" over saddle with chip guard removed.

BED LENGTHS: 5, 6, 7 and 8 feet.

DISTANCE BETWEEN CENTERS: 241/8 to 601/a inches.

COLLET CAPACITY: 1 inch.

SPINDLE BORE: 1% inches.

SPINDLE SPEEDS: Eight . . . 30 to 875

POWER LONGITUDINAL FEEDS: 48 R.H. or L.H., .0015" to .0841".

POWER CROSS FEEDS: 48, .0006" to .0315".

THREAD CUTTING: 48 R.H. or L.H.

pitches, 4 to 224 per inch. CROSS SLIDE TRAVEL: 10 inches, END INFORMATION CHECKED: BENCH LATHES Urret LATHES TOOLS & ATTACHMENTS D DRILL PRESSES BENCH SHAPE Building Better Tools Since 1906 • SOUTH BEND LATHE • South Bend 22, Indiana

III Irain Iou *Home* in Jpa Good Jobs in RADIO-TI



Industry Offers You

Many students make \$5, \$10 a week and more EXTF neighbors' Radios in spare time while learning. The day y trate sending you SPECIAL BOOKLETS that show I tester you build with kits I send helps you make extra servicing sets, gives PRACTICAL EXPERIENCE occument to Radio and Television. All equipment is yours

What will you be d year from today be on your way toward a good job or a business of you Radio-Television? NRI Courses lead to these and many of Radio and TV servicing, P.A., Auto Radio, Lab, Factory s tronic Controls Technicians, Radio and TV Broadcasting Ship and Airways Operators and Technicians. The Unite has over 105 million home and auto Radios-over 2,900 Br

from coast to coast with over 15,000,000 TV sets now in TV stations operating. This means good pay jobs with futures for operators, installation and service technicians, the time to get ready for a successful future. My lesson both Radio and Television principles and equipment I furn you practice on circuits common to both Radio and T

Television is Today's Good Job Mak

Over 1800 additional Television stations have been authorized

With both my Communications Course and

YOU LEARN BY PRACTICING in Spare Time WITH KITS I SEND



if you act to prepare now. Qualified Radiotechnicians are making good money. will increase: the field is

Find Out What R

Television Offers Keep your job while tr

home. Hundreds I've tr successful Radio-Televis nicians. Most had no experience many no n grammar school educat cide now that you are

MAIL CARD NO

Send the postage-free of for my FREE DOUBLE You get Actual Servison. Also my 64-page bo ates are doing, earning Pres., National Radio Ir

The Tested Way to Better

